


MS2231

RF AND MICROWAVE TRANSISTORS L-BAND APPLICATIONS

Features

- REFRACTORY/GOLD METALLIZATION
- EMITTER SITE BALLASTED
- LOW THERMAL RESISTANCE
- INPUT / OUTPUT MATCHING
- METAL/CERAMIC HERMETIC PACKAGE
- $P_{OUT} = 100 \text{ W MIN.}$
- $G_P = 6.0 \text{ dB GAIN}$



.400 x .500 2LFL (M216)
hermetically sealed


DESCRIPTION:

The MS2231 is a high-power Class C transistor specifically designed for L-Band Radar pulsed driver applications.

This device is capable of operation over a wide range of pulse widths, duty cycles, and temperatures and is capable of withstanding 3:1 output VSWR at rated RF conditions. Low RF thermal resistance and computerized automatic wire bonding techniques ensure high reliability and product consistency.

The MS2231 is supplied in the grounded IMPAC™ hermetic metal/ceramic package with internal input/output matching structures.

PIN CONNECTION



1. Collector 3. Emitter
2. Base 4. Base

ABSOLUTE MAXIMUM RATINGS (T_{case} = 25°C)

Symbol	Parameter	Value	Unit
P_{DISS}	Power Dissipation* (T _C ≤ 100°C)	270	W
I_C	Device Current*	13.5	A
V_{CC}	Collector-Supply Voltage*	32	V
T_J	Junction Temperature (Pulsed RF Operation)	250	°C
T_{STG}	Storage Temperature	- 65 to + 200	°C

Thermal Data

$R_{TH(j-c)}$	Junction-Case Thermal Resistance*	0.55	°C/W
---------------	-----------------------------------	------	------

*Applies only to rated RF amplifier operation

MS2231

ELECTRICAL SPECIFICATIONS (Tcase = 25°C)
STATIC

Symbol	Test Conditions	Value			Units
		Min.	Typ.	Max.	
BV_{CBO}	I_C = 50 mA I_E = 0 mA	65			V
BV_{EBO}	I_E = 10 mA I_C = 0 mA	3.5			V
BV_{CES}	I_C = 100 mA	65			V
I_{CES}	V_{BE} = 0 V V_{CE} = 32 V			20	mA
h_{FE}	V_{CE} = 5 V I_C = 5 A	15			



DYNAMIC

Symbol	Test Conditions	Value			Units
		Min.	Typ.	Max.	
P_{OUT}	f = 1215 – 1400 MHz P_{IN} = 25 W V_{CE} = 28 V	100			W
Ƴ_C	f = 1215 – 1400 MHz P_{IN} = 25 W V_{CE} = 28 V	50			%
G_P	f = 1215 – 1400 MHz P_{IN} = 25 W V_{CE} = 28 V	6			dB

Note: Pulse width = 100µSec
 Duty Cycle = 10%

PACKAGE MECHANICAL DATA

PACKAGE STYLE M216

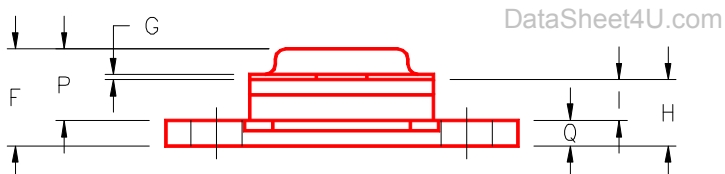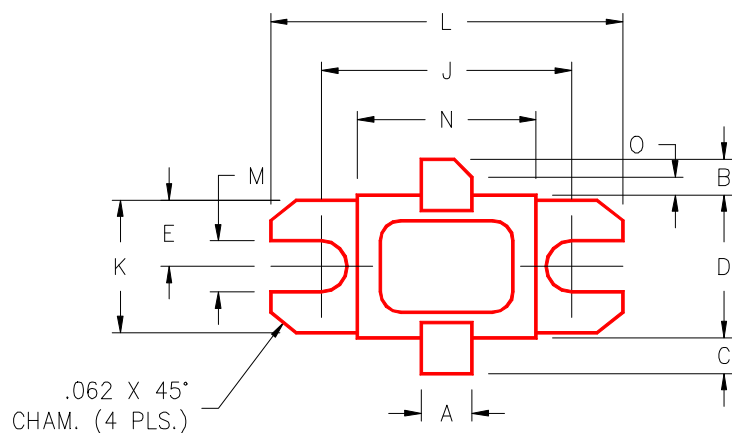

	MINIMUM INCHES/MM	MAXIMUM INCHES/MM		MINIMUM INCHES/MM	MAXIMUM INCHES/MM
A	.140/3,56		J	.700/17,78	
B	.110/2,80		K	.386/9,80	
C	.110/2,80		L	.900/22,86	
D	.395/10,03	.407/10,34	M	.120/3,05	
E	.193/4,90		N	.500/12,70	
F		.230/5,84	O	.050/1,27	
G	.003/0,08	.006/0,15	P		.170/4,32
H	.118/3,00	.131/3,33	Q	.062/1,58	
I	.063/1,60				