

P-Channel Logic Level Enhancement Mode MOSFET with Schottky Diode

MSFA0M02X8

MOSFET product Summary

BV_{DSS}	-20V
$R_{DS(on)(MAX)}$	100m Ω
I_D	-3A


Schottky Product Summary

V_{KA}	20V
V_F	0.46V
I_F	1A


Features

- Simple drive requirement
- Low on-resistance
- Fast switching speed
- Pb-free lead plating and halogen-free package

Symbol

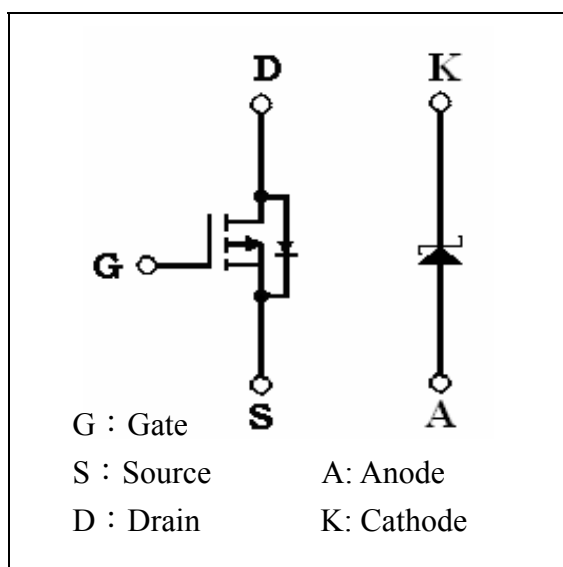

Outline

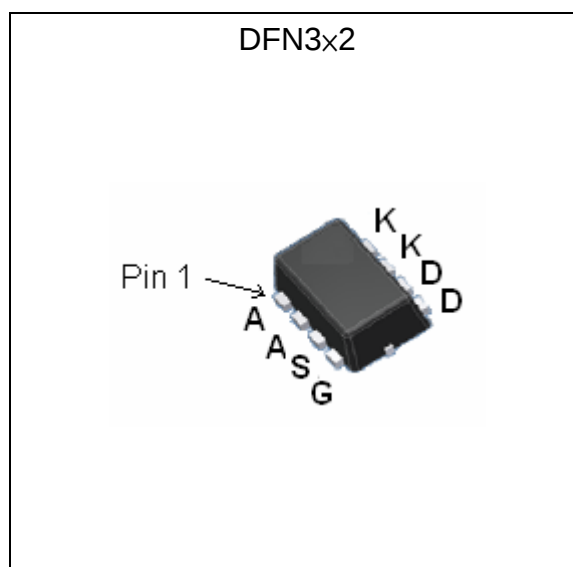

**Absolute Maximum Ratings** ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

Parameter		Symbol	Limits	Unit
Drain-Source Breakdown Voltage		BV_{DSS}	-20	V
Gate-Source Voltage		V_{GS}	± 12	V
Continuous Drain Current @ $T_A=25^{\circ}\text{C}$		I_D	-3	A
Continuous Drain Current @ $T_A=70^{\circ}\text{C}$		I_D	-2.4	
Pulsed Drain Current (Note 1)		I_{DM}	-12	
Average Forward Current (Schottky)		I_F	1	
Pulsed Forward Current (Schottky)		I_{FM}	3	
Power Dissipation (MOSFET)	$T_A=25^{\circ}\text{C}$	P_D	1.5	W
	$T_A=70^{\circ}\text{C}$		0.9	
Power Dissipation (Schottky)	$T_A=25^{\circ}\text{C}$		1.2	
	$T_A=70^{\circ}\text{C}$		0.76	
Operating Junction and Storage Temperature Range		T_J, T_{stg}	-55~+150	$^{\circ}\text{C}$

Note : 1. Pulse width limited by maximum junction temperature. Duty cycle $\leq 1\%$.

Thermal Resistance Ratings

Parameter	Symbol	Maximum	Unit
Thermal Resistance, Junction-to-case(MOSFET)	$R_{th,j-c}$	40	$^{\circ}\text{C/W}$
Thermal Resistance, Junction-to-ambient(MOSFET)	$R_{th,j-a}$	85	
Thermal Resistance, Junction-to-case(Schottky)	$R_{th,j-c}$	50	
Thermal Resistance, Junction-to-ambient(Schottky)	$R_{th,j-a}$	105	

Electrical Characteristics ($T_A=25^{\circ}\text{C}$, unless otherwise noted)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
Static					
BV_{DSS}	-20	-	-	V	$V_{GS}=0V, I_D=-250\mu A$
$V_{GS(th)}$	-0.3	-0.75	-1.2	V	$V_{DS}=V_{GS}, I_D=-250\mu A$
I_{GSS}	-	-	± 100	nA	$V_{GS}=\pm 12V, V_{DS}=0V$
I_{DSS}	-	-	-1	μA	$V_{DS}=-16V, V_{GS}=0V$
	-	-	-10	μA	$V_{DS}=-16V, V_{GS}=0, T_J=125^{\circ}\text{C}$
$I_{D(ON)}$	-3	-	-	A	$V_{DS}=-5V, V_{GS}=-4.5V$
$*R_{DS(ON)}$	-	85	100	m Ω	$I_D=-3A, V_{GS}=-4.5V$
	-	120	150		$I_D=-2.5A, V_{GS}=-2.5V$
$*G_{FS}$	-	4.5	-	S	$V_{DS}=-5V, I_D=-3A$
Dynamic					
C_{iss}	-	1033	-	pF	$V_{DS}=-10V, V_{GS}=0, f=1\text{MHz}$
C_{oss}	-	386	-		
C_{rss}	-	367	-		
R_g	-	6.5	-	Ω	$V_{GS}=15\text{mV}, V_{DS}=0V, f=1\text{MHz}$

*t _{d(ON)}	-	15	-	ns	V _{DS} =-10V, I _D =-1A, V _{GS} =-4.5V, R _{GS} =6Ω
*t _r	-	30	-		
*t _{d(OFF)}	-	35	-		
*t _f	-	30	-		
*Q _g	-	10	-	nC	V _{DS} =-10V, I _D =-3A, V _{GS} =-4.5V
*Q _{gs}	-	3.6	-		
*Q _{gd}	-	3	-		
Source-Drain Diode					
*V _{SD}	-	-	1.2	V	V _{GS} =0V, I _F =I _S
*I _S	-	-	-2.5	A	
*I _{SM}	-	-	-10	A	


*Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%

Schottky Electrical Characteristics (T_A=25°C, unless otherwise noted)

Symbol	Min.	Typ.	Max.	Unit	Test Conditions
*V _F	-	0.40	0.46	V	I _F =0.5A
	-	0.47	0.56		I _F =1A
	-	0.44	0.53		I _F =1A, T _J =125°C
I _{RM}	-	0.008	0.08	mA	V _R =5V
	-	2.8	28		V _R =5V, T _J =125°C
	-	0.009	0.09		V _R =20V
	-	3.2	32		V _R =20V, T _J =125°C
C _T	-	30	-	pF	V _R =10V







*Pulse Test : Pulse Width ≤300μs, Duty Cycle≤2%

Recommended Footprint







Characteristic Curves





MOSFET TYPICAL CHARACTERISTICS

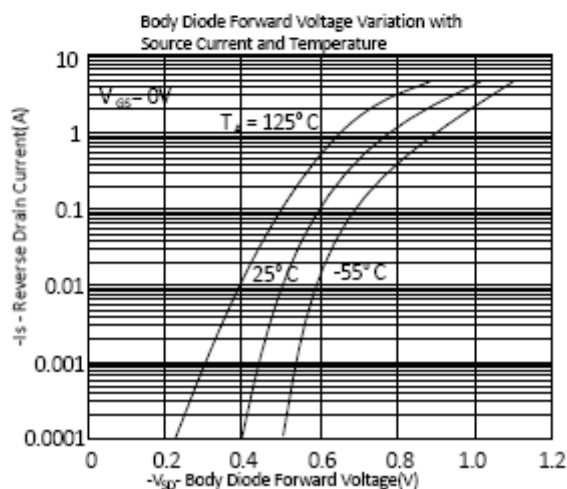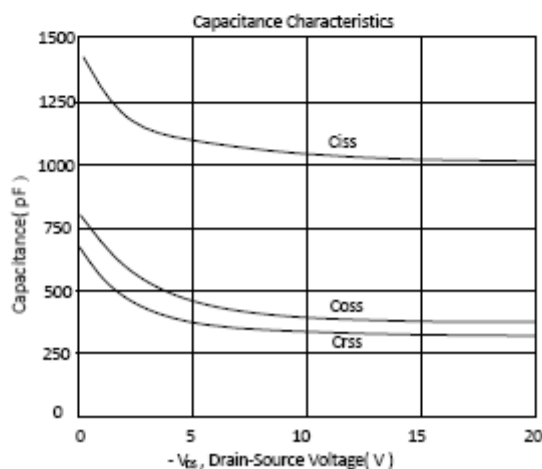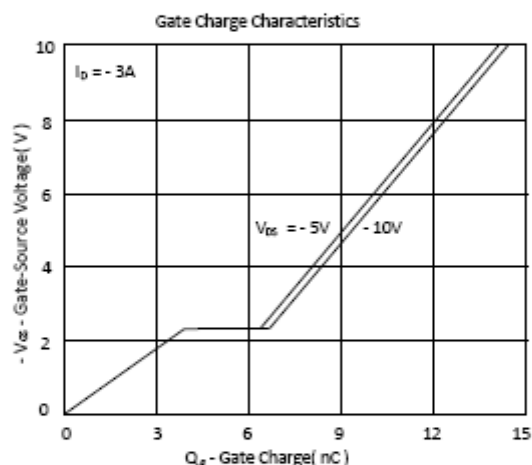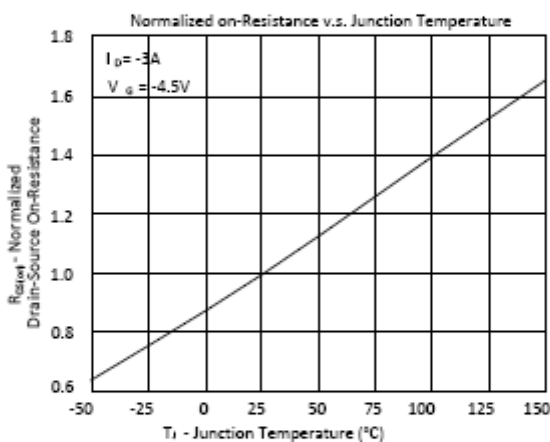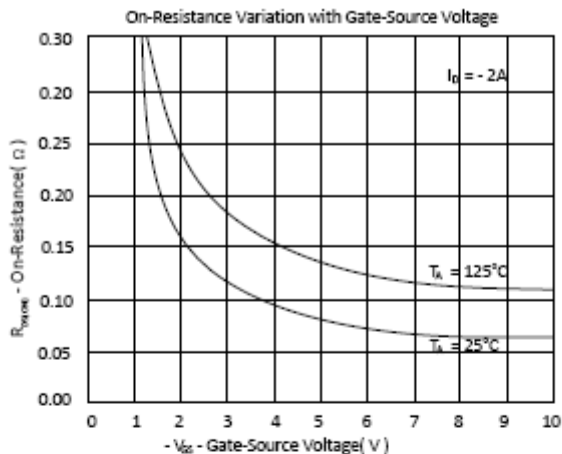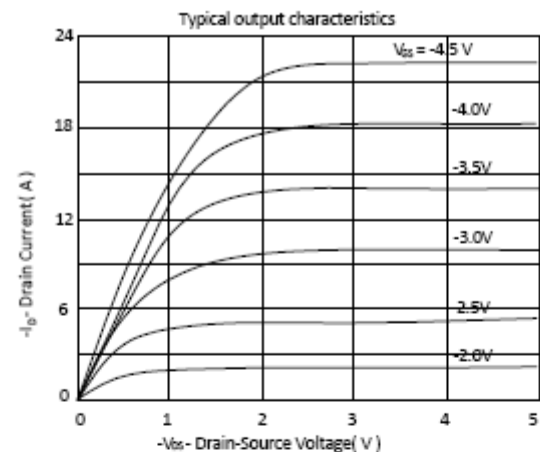


Characteristic Curves(Cont.)

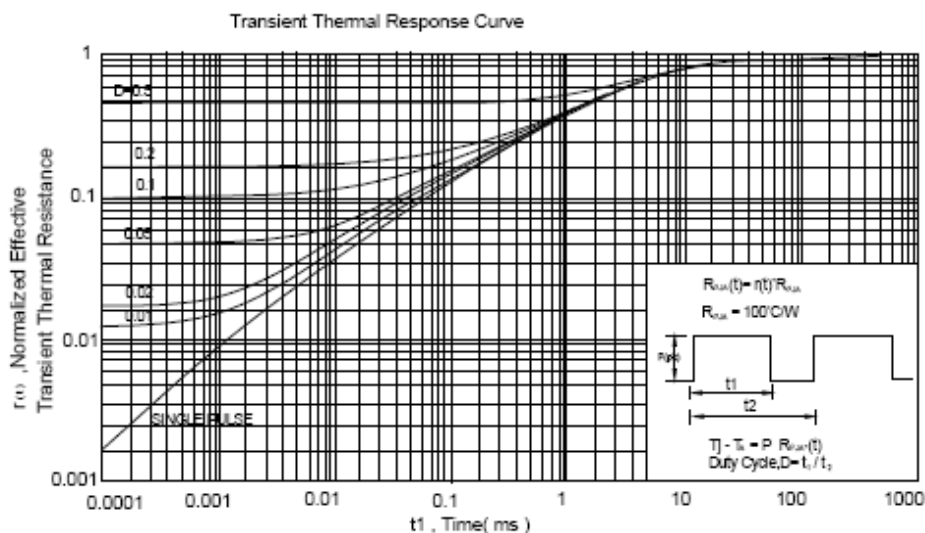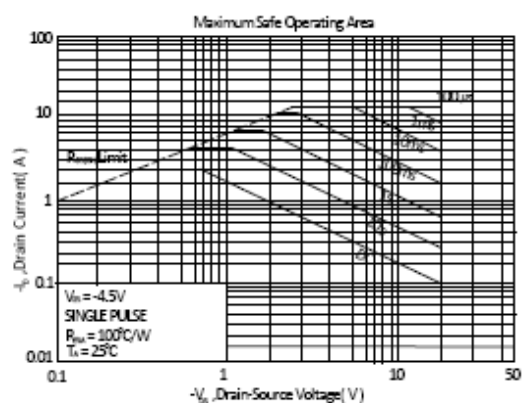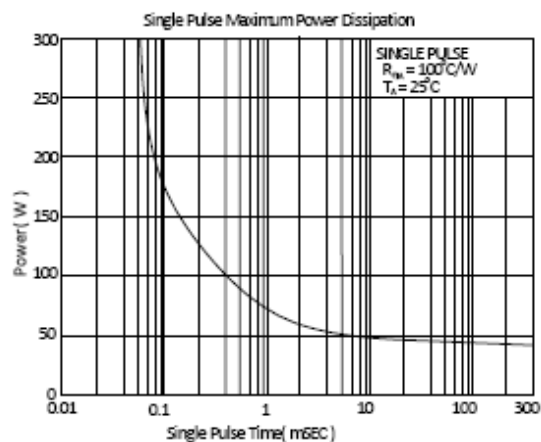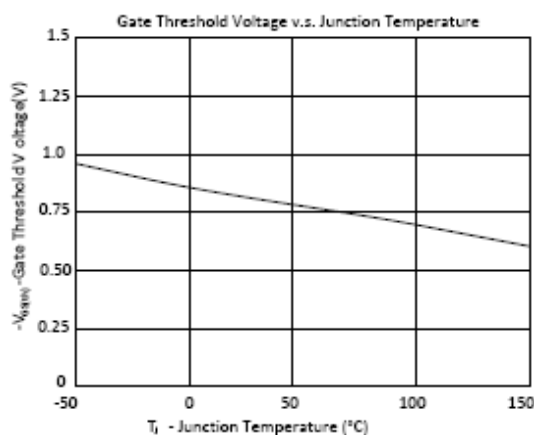

Schottky Characteristic Curves

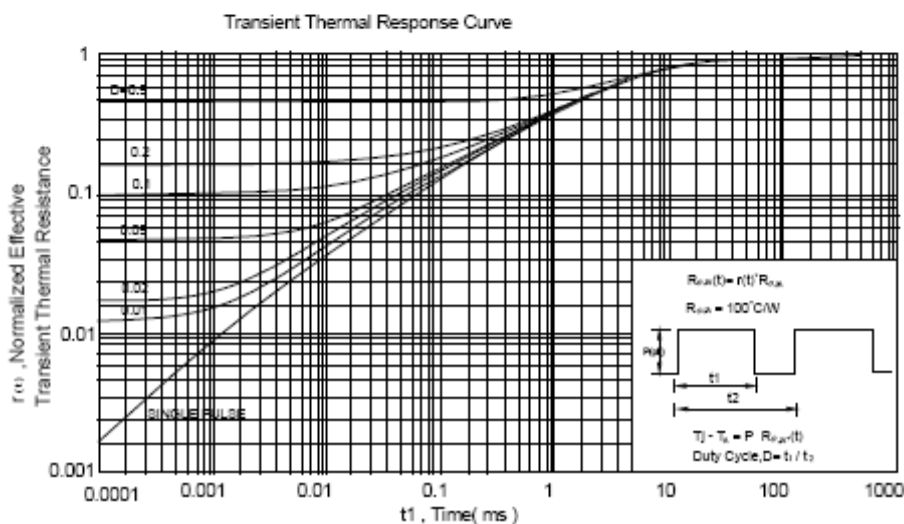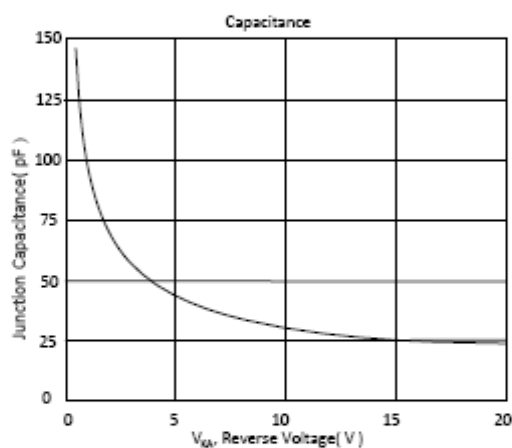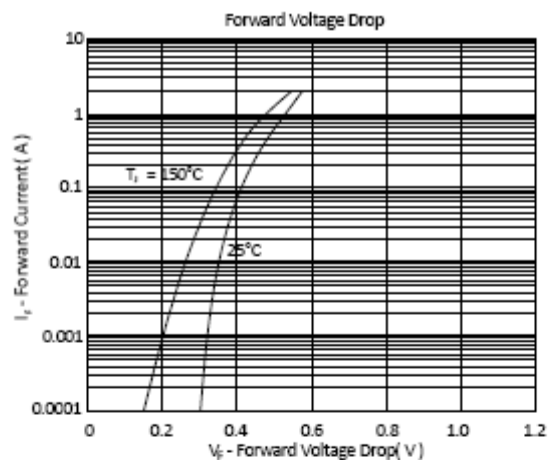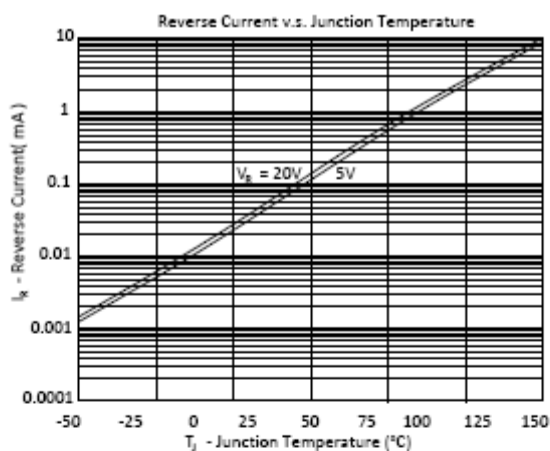

DFN3x2 Dimension

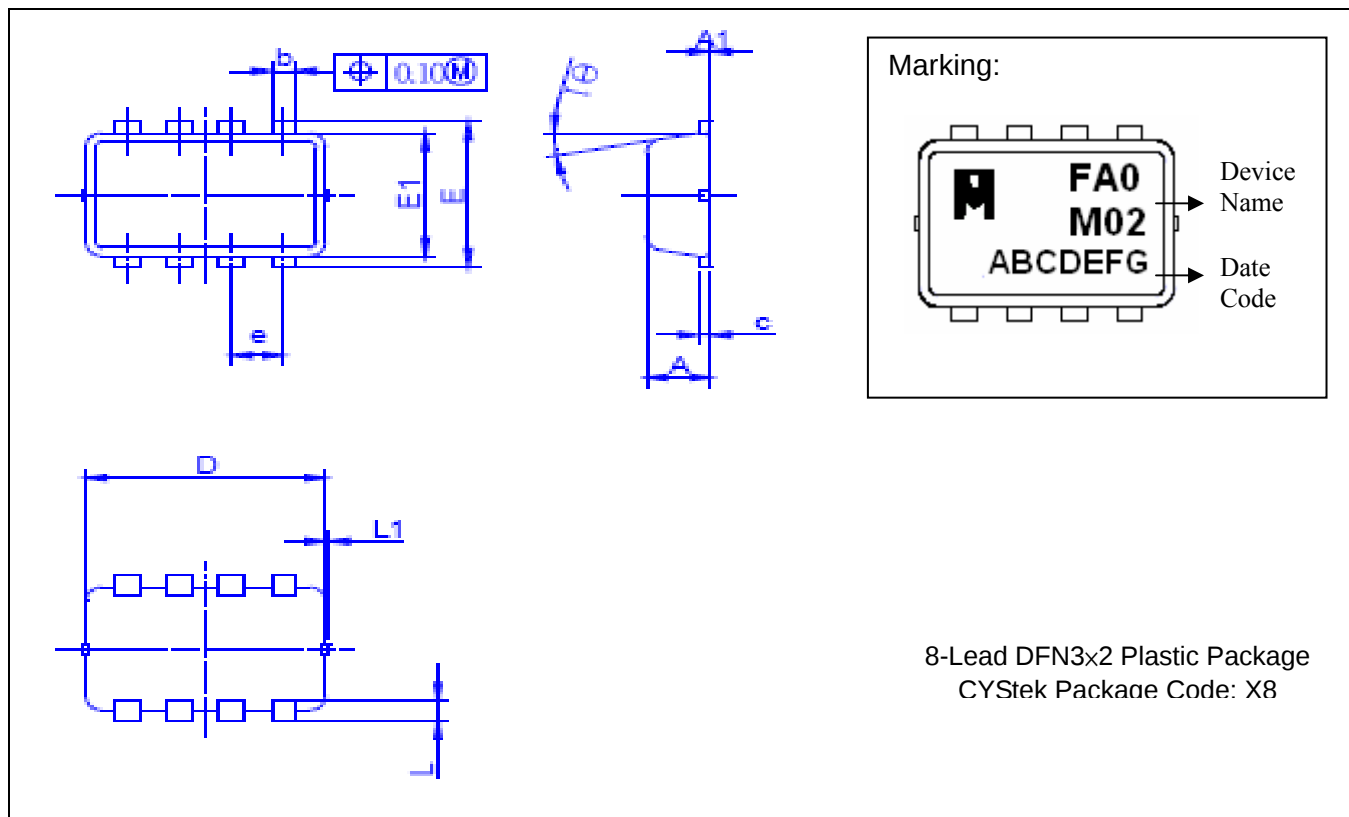

*: Typical

DIM	Inches		Millimeters		DIM	Inches		Millimeters	
	Min.	Max.	Min.	Max.		Min.	Max.	Min.	Max.
A	0.0276	0.0354	0.70	0.90	E1	*0.0689		*1.75	
A1	0.0000	0.0020	0.00	0.05	e	*0.0256		*0.65	
b	0.0094	0.0138	0.24	0.35	L	0.0079	0.0157	0.20	0.40
c	0.0031	0.0098	0.08	0.25	L1	0.0000	0.0039	0.00	0.10
D	*0.0118		*3.00		θ1	0°	12°	0°	12°
E	*0.0079		*2.00						

Notes: 1. Controlling dimension: millimeters.

2. Maximum lead thickness includes lead finish thickness, and minimum lead thickness is the minimum thickness of base material.

3. If there is any question with packing specification or packing method, please contact your local CYStek sales office.

Material:

- Lead: pure tin plated
- Mold Compound: Epoxy resin family, flammability solid burning class: UL94V-0

Important Notice:

- All rights are reserved. Reproduction in whole or in part is prohibited without the prior written approval of CYStek.
- CYStek reserves the right to make changes to its products without notice.
- CYStek **semiconductor products are not warranted to be suitable for use in Life-Support Applications, or systems.**
- CYStek assumes no liability for any consequence of customer product design, infringement of patents, or application assistance.