


STRAIGHT LEAD T-1 1/4 ULTRA BRIGHT LED LAMPS

APPLICATIONS

- PANEL CIRCUIT INDICATOR
- LIGHTED SWITCHES
- BAR CODE SCANNER
- MEASURING EQUIPMENT

FEATURES

- Ultra bright.
- All plastic mold type.
- Colorless clear lens.
- Low drive current, high intensity red light emission.
- Excellent on/off contrast ratio.
- Fast response time, capable of pulse operation.

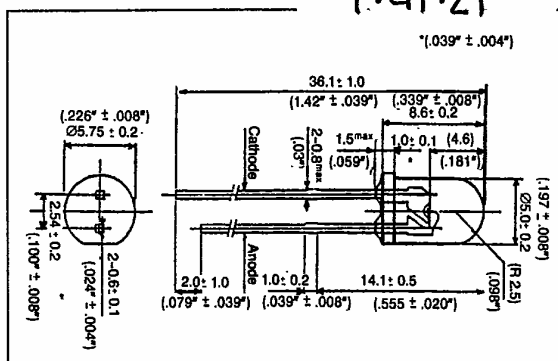

MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

PART NO.	FORWARD CURRENT (I_F) (mA)	REVERSE VOLTAGE (V_R) (V)	POWER DISSIPATION (P_D) (mW)	OPERATING TEMPERATURE (T_{opr}) ($^\circ\text{C}$)	STORAGE TEMPERATURE (T_{stg}) ($^\circ\text{C}$)
MT150F-URC	50	3	100	-20 ~ 80	-30 ~ 100
MT150F-URB	50	3	100	-20 ~ 80	-30 ~ 100
MT150F-URA	50	3	100	-20 ~ 80	-30 ~ 100

OPTO-ELECTRICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

PART NO.	MATERIAL	LENS COLOR	VIEWING ANGLE	LUMINOUS INTENSITY (mcd)				FORWARD VOLTAGE (V)			REVERSE CURRENT		PEAK WAVELENGTH (nm)	SPEC. LINE HALF WIDTH (nm)
				typ.	min.	typ.	max. @mA	typ.	max.	@mA	μA	V_r		
MT150F-URC	GaAlAs	Water/Clear	30°	3200	4000	5000	20	1.8	2.4	20	100	3	680	25
MT150F-URB	GaAlAs	Water/Clear	30°	1600	2300	3200	20	1.8	2.4	20	100	3	680	25
MT150F-URA	GaAlAs	Water/Clear	30°	800	1100	1600	20	1.8	2.4	20	100	3	680	25