

Small Signal Product

500mW, Hermetically Sealed Glass Zener Diodes

FEATURES

- Zener voltage range : 2.0V to 39V
- DO-34 package (JEDEC DO-204)
- Through-hole device type mounting
- Hermetically sealed glass
- Compression bonded construction
- All external surfaces are corrosion resistant and leads are readily solderable
- RoHS compliant
- Solder hot dip Tin (Sn) lead finish
- Cathode indicated by polarity band



DO-34



MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS (T _A =25°C unless otherwise noted)			
PARAMETER	SYMBOL	VALUE	UNIT
Power dissipation	P _D	500	mW
Lead temperature (1/16" from case for 10 seconds)	L _t	230	°C
Operating junction temperature	T _J	175	°C
Storage temperature range	T _{STG}	-65 to +200	°C

Small Signal Product

RATINGS AND CHARACTERISTICS CURVES

(T_A=25°C unless otherwise noted)

Type Number	Tolerance		Marking code	V _Z @ I _{ZT} (Volt)			I _{ZT} (mA)	Z _{ZT} @ I _{ZT} (Ω) Max	Z _{ZK} @ I _{ZK} (Ω) Max	I _{ZK} (mA)	I _R (μA) Max	V _R (V)
				Nom	Min	Max						
MTZJ2V0	A	5.5%	2V0A	1.990	1.88	2.10	5	100	1000	0.5	120	0.5
	B	4.3%	2V0B	2.110	2.02	2.20						
MTZJ2V2	A	4.0%	2V2A	2.210	2.12	2.30	5	100	1000	0.5	100	0.7
	B	4.1%	2V2B	2.315	2.22	2.41						
MTZJ2V4	A	3.9%	2V4A	2.425	2.33	2.52	5	100	1000	0.5	120	1.0
	B	4.0%	2V4B	2.530	2.43	2.63						
MTZJ2V7	A	4.0%	2V7A	2.645	2.54	2.75	5	110	1000	0.5	100	1.0
	B	3.9%	2V7B	2.800	2.69	2.91						
MTZJ3V0	A	3.7%	3V0A	2.960	2.85	3.07	5	120	1000	0.5	50	1.0
	B	3.4%	3V0B	3.115	3.01	3.22						
MTZJ3V3	A	3.4%	3V3A	3.270	3.16	3.38	5	120	1000	0.5	20	1.0
	B	3.1%	3V3B	3.425	3.32	3.53						
MTZJ3V6	A	3.6%	3V6A	3.575	3.455	3.695	5	100	1000	1.0	10	1.0
	B	3.3%	3V6B	3.723	3.60	3.845						
MTZJ3V9	A	3.5%	3V9A	3.875	3.74	4.01	5	100	1000	1.0	5	1.0
	B	3.3%	3V9B	4.025	3.89	4.16						
MTZJ4V3	A	3.0%	4V3A	4.165	4.04	4.29	5	100	1000	1.0	5.0	1.0
	B	3.0%	4V3B	4.300	4.17	4.43						
	C	3.0%	4V3C	4.435	4.30	4.57						
MTZJ4V7	A	2.6%	4V7A	4.56	4.44	4.68	5	80	900	1.0	5.0	1.0
	B	2.8%	4V7B	4.68	4.55	4.80						
	C	2.7%	4V7C	4.81	4.68	4.93						
MTZJ5V1	A	2.6%	5V1A	4.94	4.81	5.07	5	80	800	1.0	5.0	1.5
	B	2.6%	5V1B	5.07	4.94	5.20						
	C	2.7%	5V1C	5.23	5.09	5.37						
MTZJ5V6	A	2.4%	5V6A	5.41	5.28	5.55	5	60	500	1.0	5.0	2.5
	B	2.5%	5V6B	5.59	5.45	5.73						
	C	2.6%	5V6C	5.76	5.61	5.91						
MTZJ6V2	A	2.7%	6V2A	5.94	5.78	6.09	5	60	300	1.0	5.0	3.0
	B	2.6%	6V2B	6.12	5.96	6.27						
	C	2.5%	6V2C	6.28	6.12	6.44						
MTZJ6V8	A	2.6%	6V8A	6.46	6.29	6.63	5	20	150	0.5	2.0	3.5
	B	2.6%	6V8B	6.66	6.49	6.83						
	C	2.6%	6V8C	6.84	6.66	7.01						
MTZJ7V5	A	2.7%	7V5A	7.04	6.85	7.22	5	20	120	0.5	0.5	4.0
	B	2.6%	7V5B	7.26	7.07	7.45						
	C	2.5%	7V5C	7.48	7.29	7.67						
MTZJ8V2	A	2.6%	8V2A	7.73	7.53	7.92	5	20	120	0.5	0.5	5.0
	B	2.6%	8V2B	7.99	7.78	8.19						
	C	2.5%	8V2C	8.24	8.03	8.45						
MTZJ9V1	A	2.6%	9V1A	8.51	8.29	8.73	5	25	120	0.5	0.5	6.0
	B	2.5%	9V1B	8.79	8.57	9.01						
	C	2.6%	9V1C	9.07	8.83	9.30						

Small Signal Product

Type Number	Tolerance		Marking code	V _Z @ I _{ZT} (Volt)			I _{ZT} (mA)	Z _{ZT} @ I _{ZT} (Ω) Max	Z _{ZK} @ I _{ZK} (Ω) Max	I _{ZK} (mA)	I _R (μA) Max	V _R (V)
				Nom	Min	Max						
MTZJ10	A	2.6%	10VA	9.36	9.12	9.59	5	30	120	0.5	0.2	7.0
	B	2.6%	10VB	9.66	9.41	9.90						
	C	2.5%	10VC	9.95	9.70	10.20						
	D	2.5%	10VD	10.19	9.97	10.44						
MTZJ11	A	2.6%	11VA	10.45	10.18	10.71	5	30	120	0.5	0.2	8.0
	B	2.6%	11VB	10.78	10.500	11.05						
	C	2.5%	11VC	11.10	10.82	11.38						
MTZJ12	A	2.5%	12VA	11.42	11.13	11.71	5	30	110	0.5	0.2	9.0
	B	2.6%	12VB	11.74	11.44	12.03						
	C	2.6%	12VC	12.05	11.74	12.35						
MTZJ13	A	2.6%	13VA	12.43	12.11	12.75	5	35	110	0.5	0.2	10
	B	2.6%	13VB	12.88	12.55	13.21						
	C	2.6%	13VC	13.33	12.99	13.66						
MTZJ15	A	2.5%	15VA	13.79	13.44	14.13	5	40	110	0.5	0.2	11
	B	2.6%	15VB	14.26	13.89	14.62						
	C	2.5%	15VC	14.72	14.35	15.09						
MTZJ16	A	2.6%	16VA	15.19	14.80	15.57	5	40	150	0.5	0.2	12
	B	2.6%	16VB	15.65	15.25	16.04						
	C	2.5%	16VC	16.10	15.69	16.51						
MTZJ18	A	2.5%	18VA	16.64	16.22	17.06	5	45	150	0.5	0.2	13
	B	2.5%	18VB	17.26	16.82	17.70						
	C	2.6%	18VC	17.88	17.42	18.33						
MTZJ20	A	2.5%	20VA	18.49	18.02	18.96	5	55	200	0.5	0.5	15
	B	2.5%	20VB	19.11	18.63	19.59						
	C	2.5%	20VC	19.73	19.23	20.22						
	D	2.5%	20VD	20.22	19.72	20.72						
MTZJ22	A	2.2%	22VA	20.68	20.15	21.2	5	30	200	0.5	0.2	17
	B	2.5%	22VB	21.18	20.64	21.71						
	C	2.5%	22VC	21.63	21.08	22.17						
	D	2.5%	22VD	22.08	21.52	22.63						
MTZJ24	A	2.5%	24VA	22.62	22.02	23.18	5	35	200	0.5	0.2	19
	B	2.5%	24VB	23.19	22.61	23.77						
	C	2.5%	24VC	23.72	23.12	24.31						
	D	2.5%	24VD	24.24	23.63	24.85						
MTZJ27	A	2.5%	27VA	24.89	24.26	25.52	5	45	250	0.5	0.2	21
	B	2.5%	27VB	25.62	24.97	26.26						
	C	2.5%	27VC	26.29	25.63	26.95						
	D	2.5%	27VD	26.97	26.29	27.64						
MTZJ30	A	2.5%	30VA	27.69	26.99	28.39	5	55	250	0.5	0.2	23
	B	2.5%	30VB	28.42	27.70	29.13						
	C	2.5%	30VC	29.09	28.36	29.82						
	D	2.5%	30VD	29.77	29.02	30.51						

Small Signal Product

Type Number	Tolerance		Marking code	V _Z @ I _{ZT} (Volt)			I _{ZT} (mA)	Z _{ZT} @ I _{ZT} (Ω) Max	Z _{ZK} @ I _{ZK} (Ω) Max	I _{ZK} (mA)	I _R (μA) Max	V _R (V)
				Nom	Min	Max						
MTZJ33	A	2.5%	33VA	30.45	29.68	31.22	5	65	250	0.5	0.2	25
	B	2.5%	33VB	31.10	30.32	31.88						
	C	2.5%	33VC	31.70	30.90	32.50						
	D	2.5%	33VD	32.30	31.49	33.11						
MTZJ36	A	2.5%	36VA	32.97	32.14	33.79	5	75	250	0.5	0.2	27
	B	2.5%	36VB	33.64	32.79	34.49						
	C	2.5%	36VC	34.27	33.40	35.13						
	D	2.5%	36VD	34.89	34.01	35.77						
MTZJ39	A	2.5%	39VA	35.58	34.68	36.47	5	85	250	0.5	0.2	30
	B	2.5%	39VB	36.28	35.36	37.19						
	C	2.5%	39VC	36.93	36.00	37.85						
	D	2.5%	39VD	37.58	36.63	38.52						

Notes: 1. The Zener Voltage subdivision (V_Z) is measured 40ms after diode is powered up.

2. The operating resistance (Z_{ZT} or Z_{ZK}) is measured by superimposing a minute alternation current in the regulated current (I_Z).

3. When ordering, please specify tolerance A, B, C or D

Small Signal Product

Fig. 1 $V_Z - I_Z$ Characteristics

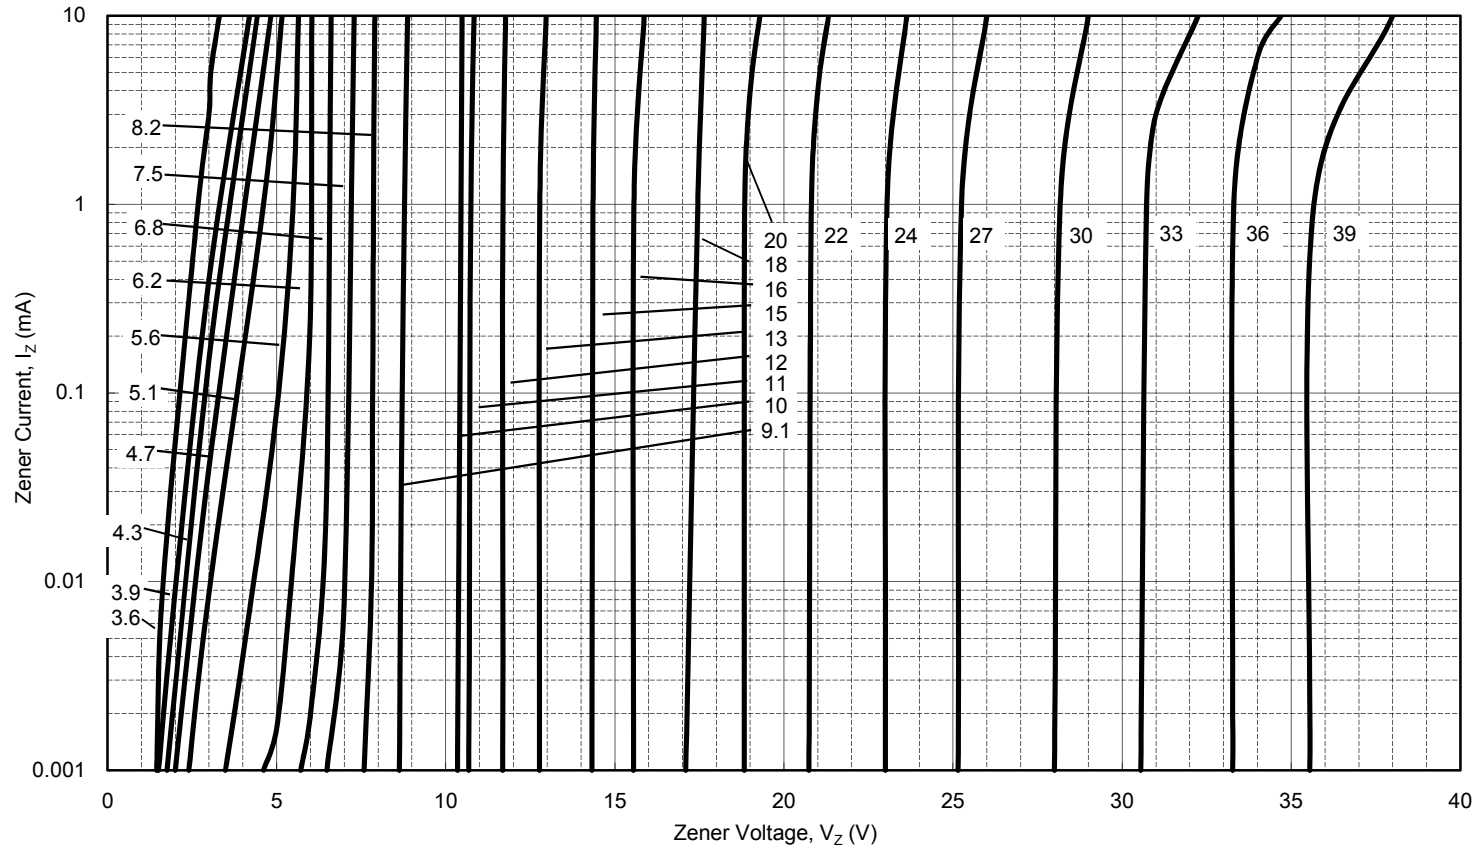


Fig. 2 $P_D - T_A$ Characteristics

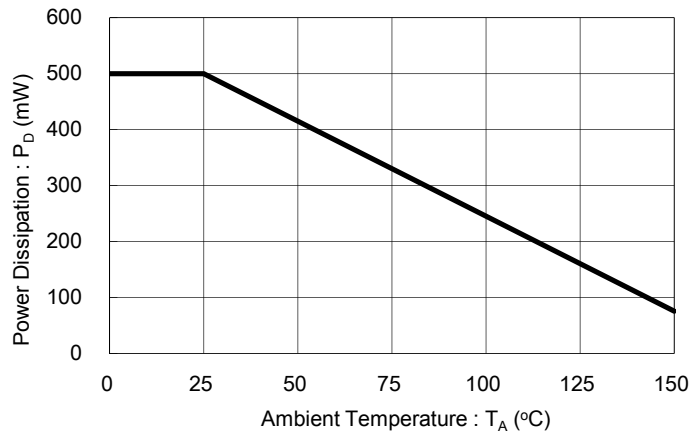


Fig. 3 PRSM - Time Characteristics

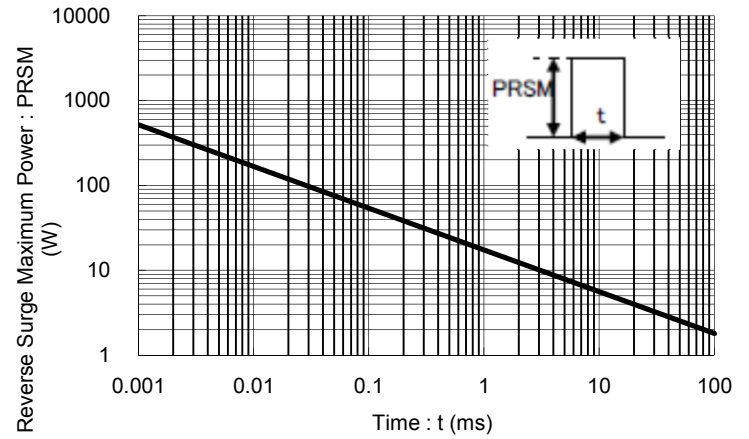


Fig. 4 $r_z - V_Z$ Characteristics


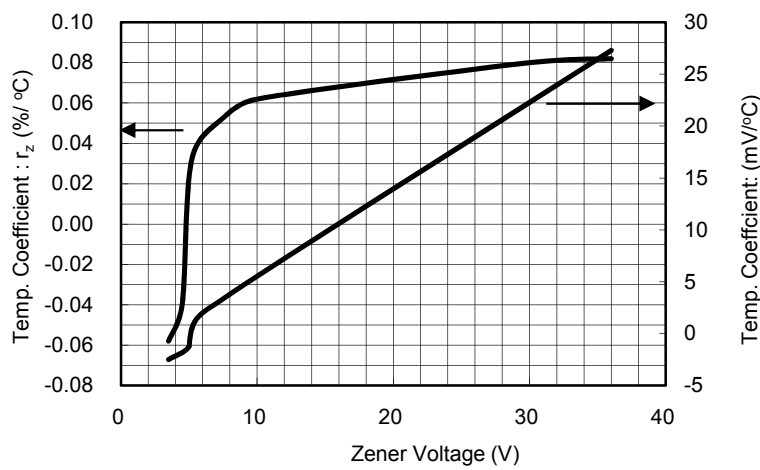


Fig. 5 $R_{th} - t$ Characteristics

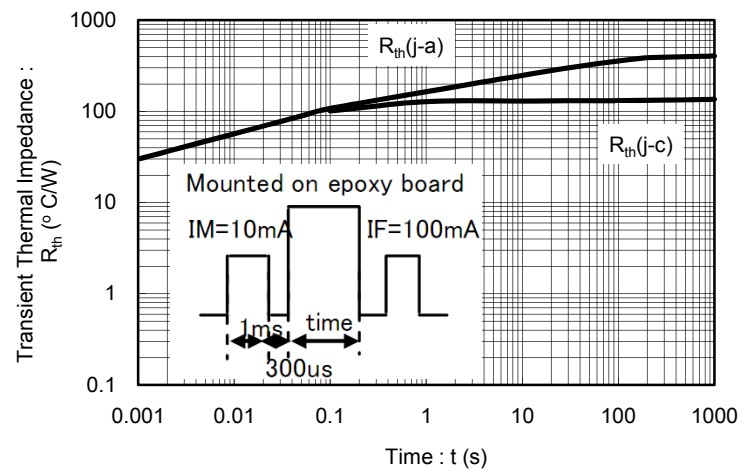

Small Signal Product

Fig. 6 $V_Z - I_Z$ Characteristics

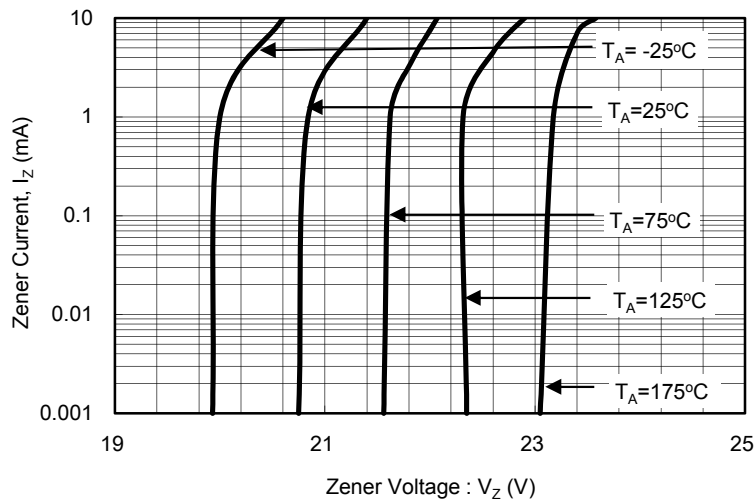


Fig. 7 $V_R - I_R$ Characteristics

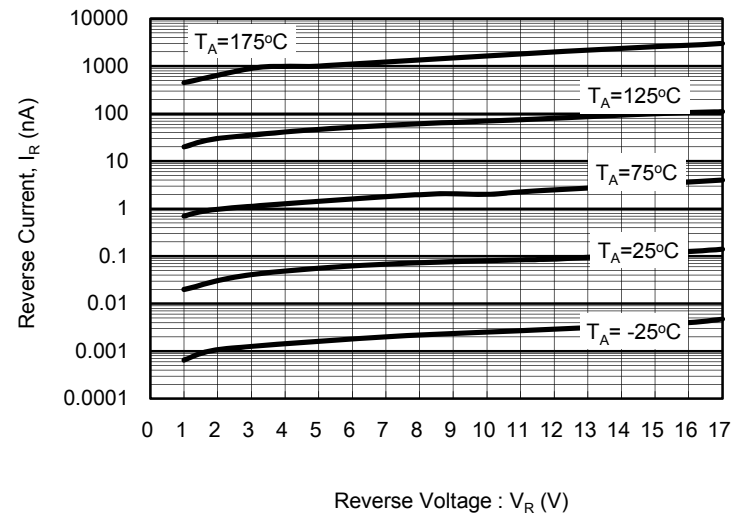


Fig. 8 $V_R - C_t$ Characteristics






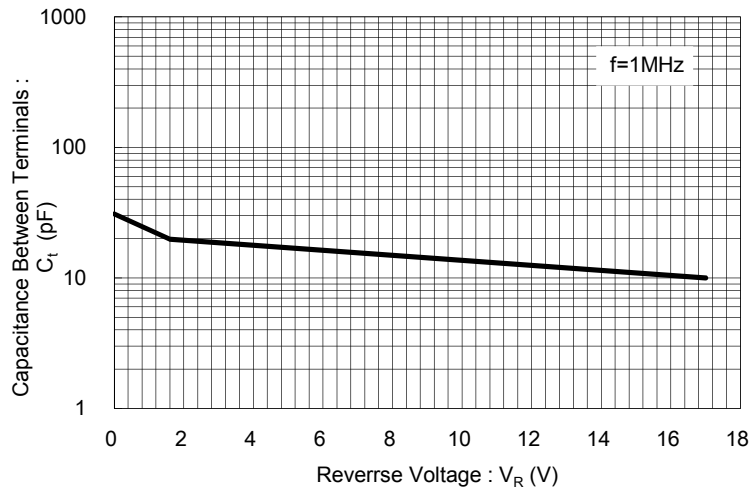


Fig. 9 $Z_Z - I_Z$ Characteristics

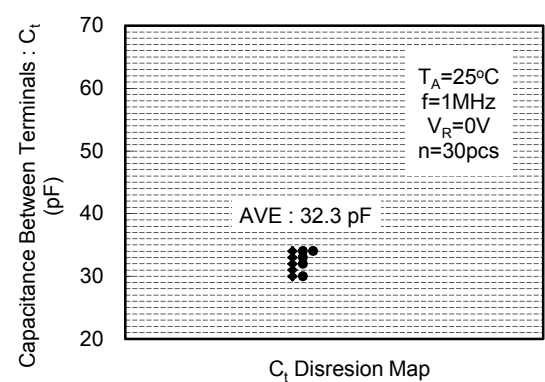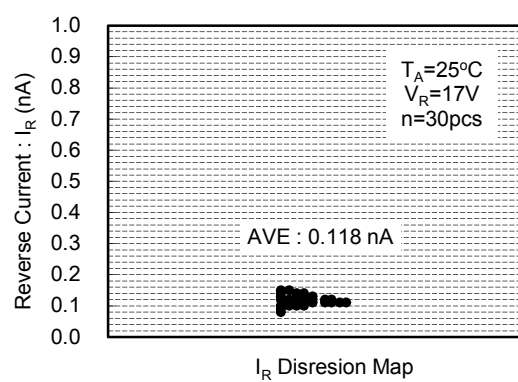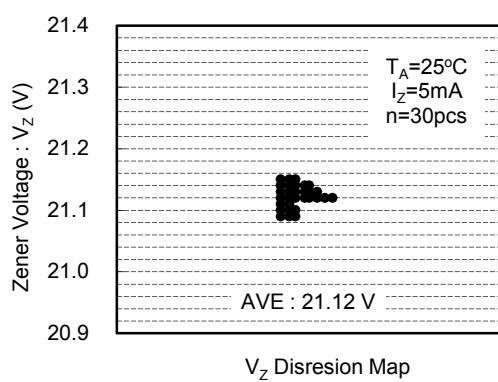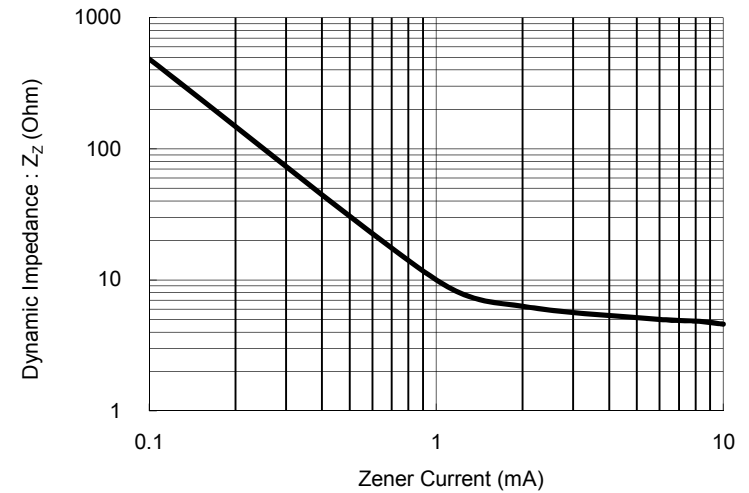


Small Signal Product

ORDER INFORMATION (EXAMPLE)

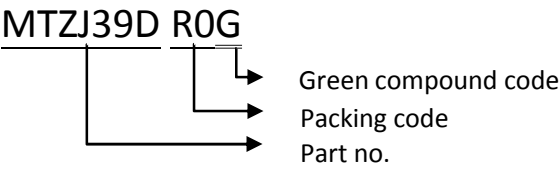

PACKAGE OUTLINE DIMENSIONS

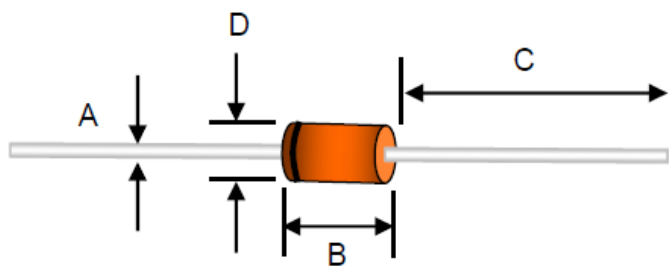

DIM.	Unit(mm)		Unit(inch)	
	Min	Max	Min	Max
A	0.30	0.55	0.012	0.022
B	2.16	3.04	0.085	0.120
C	25.40	38.10	1.000	1.500
D	1.27	2.00	0.050	0.079

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.