

MUR10150E

10A ULTRA FAST RECTIFIER

FEATURES

- Available as "HR" (high reliability) screened per MIL-PRF-19500, JANTX level. Add "HR" suffix to base part number.
- Available as non-RoHS (Sn/Pb plating), standard, and as RoHS by adding "-PBF" suffix.

MAXIMUM RATINGS

Rating	Symbol	MUR10150E	Unit
Peak repetitive reverse voltage	V_{RRM}	1500	V
Working peak reverse voltage	V_{RWM}		
DC blocking voltage	V_R		
Average rectified forward current (Rated V_R)	$I_{F(AV)}$	10 @ $T_C = 125^\circ\text{C}$	A
Peak repetitive forward current (Rated V_R square wave, 20 kHz)	I_{FRM}	20 @ $T_C = 125^\circ\text{C}$	A
Non-repetitive peak surge current (surge applied at rated load conditions, halfwave, single phase, 60Hz)	I_{FSM}	100	A
Operating and storage junction temperature range	T_J, T_{stg}	-65 to +125	$^\circ\text{C}$
Controlled avalanche energy	W_{AVAIL}	20	mJ
Maximum thermal resistance Junction to case	$R_{\theta JC}$	2.0	$^\circ\text{C/W}$

ELECTRICAL CHARACTERISTICS ($T_C = 25^\circ\text{C}$ unless otherwise noted)

Parameter	Symbol	MUR10150E		Unit
		Typ	Max	
Maximum instantaneous forward voltage ⁽¹⁾ ($I_F = 6.5\text{A}$, $T_C = 125^\circ\text{C}$) ($I_F = 6.5\text{A}$, $T_C = 25^\circ\text{C}$)	V_F	1.7 1.9	2.2 2.4	V
Maximum instantaneous reverse current ⁽¹⁾ (Rated dc voltage, $T_C = 125^\circ\text{C}$) (Rated dc voltage, $T_C = 25^\circ\text{C}$)	I_R	750 25	1000 100	μA
Maximum reverse recovery time ($I_F = 1.0\text{A}$, $di/dt = 50\text{A}/\mu\text{s}$)	t_{rr}	150	175	ns
Maximum forward recovery time ($I_F = 6.5\text{A}$, $di/dt = 12\text{A}/\mu\text{s}$)	t_{fr}	135	175	ns
Peak transient overshoot voltage	V_{RFM}	14	16	V


Note 1: Pulse test: Pulse width = 300 μs , duty cycle $\leq 2.0\%$.

MUR10150E

10A ULTRA FAST RECTIFIER

MECHANICAL CHARACTERISTICS

Case	TO-220AC
Marking	Alpha-numeric
Pin out:	See below

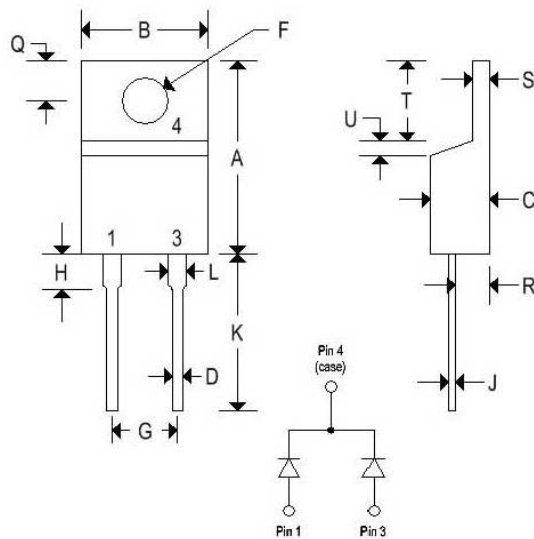

	TO-220AC			
	Inches		Millimeters	
	Min	Max	Min	Max
A	0.595	0.620	15.110	15.750
B	0.380	0.405	9.650	10.290
C	0.160	0.190	4.060	4.820
D	0.142	0.147	3.610	3.730
F	0.142	0.147	3.610	3.730
G	0.190	0.210	4.830	5.330
H	0.110	0.130	2.790	3.300
J	0.018	0.025	0.460	0.640
K	0.500	0.562	12.700	14.270
L	0.045	0.050	1.140	1.270
Q	0.100	0.120	2.540	3.040
R	0.080	0.110	2.040	2.790
S	0.045	0.055	1.140	1.390
T	0.235	0.255	5.970	6.480
U	0.030	0.050	0.760	1.270

MUR10150E

10A ULTRA FAST RECTIFIER

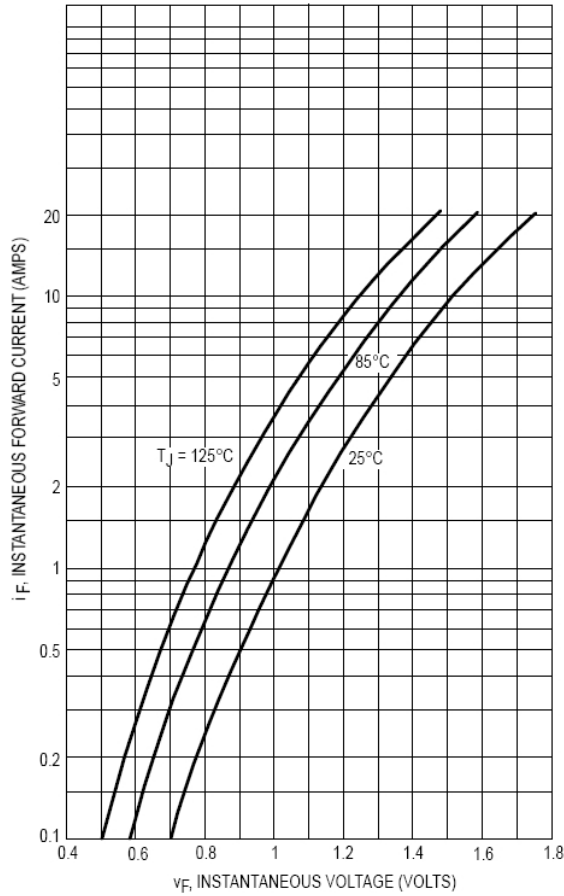


Figure 1. Typical Forward Voltage

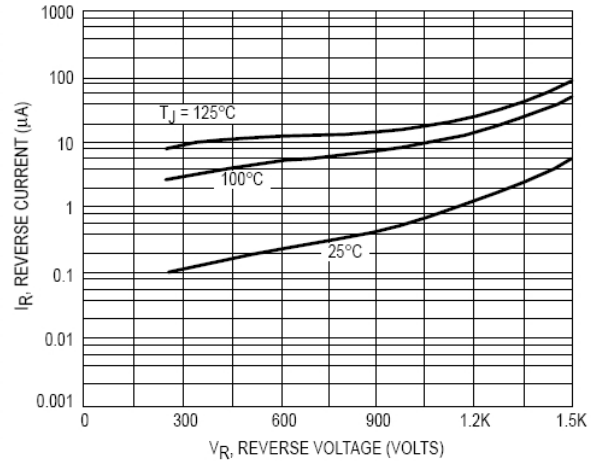


Figure 2. Typical Reverse Current

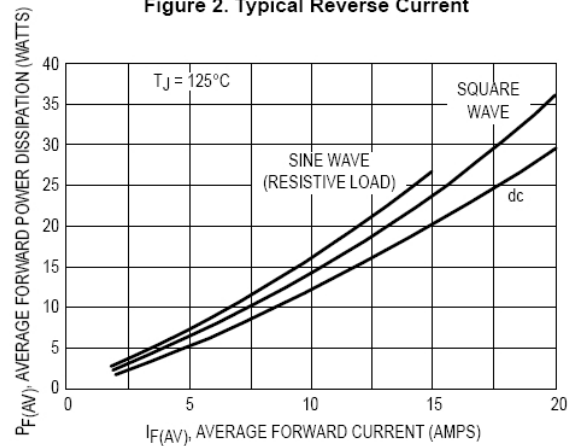


Figure 3. Forward Power Dissipation

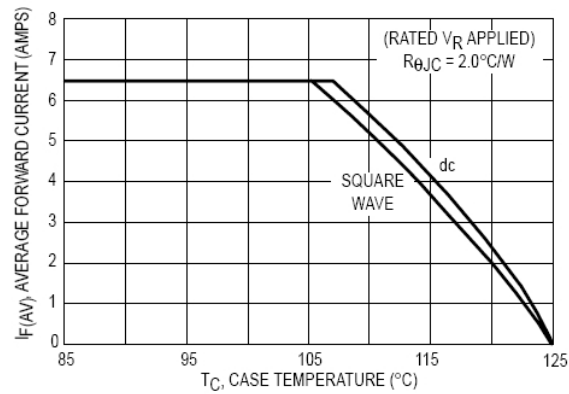


Figure 4. Current Derating Case

MUR10150E

10A ULTRA FAST RECTIFIER

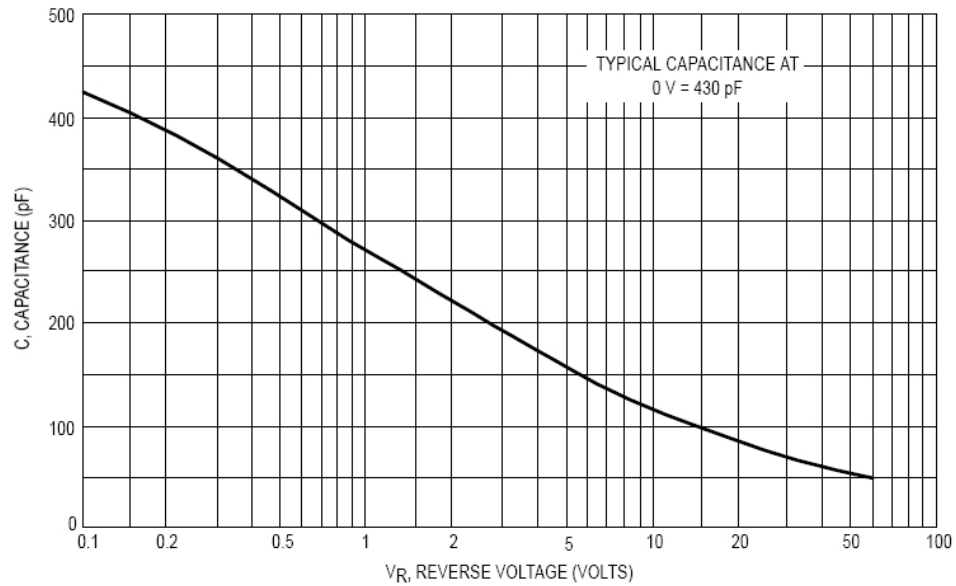


Figure 5. Typical Capacitance

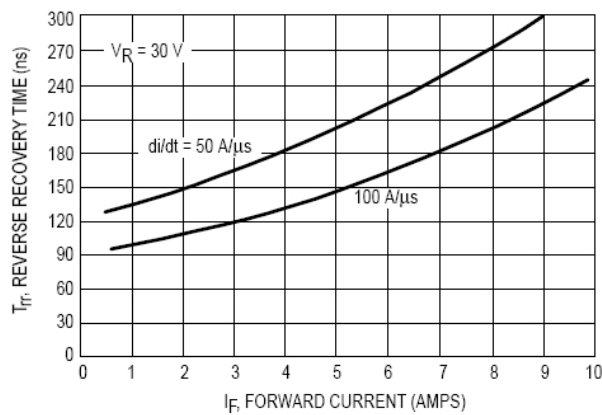


Figure 6. Typical Reverse Recovery Time

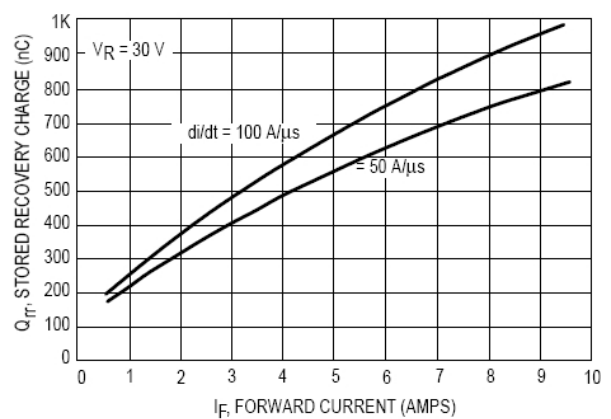


Figure 7. Typical Stored Recovery Charge