




ITO-220AB

Features

- Low cost
- Diffused junction
- Low leakage
- Low forward voltage drop
- High current capability
- Easily cleaned with Alcohol, Isopropanol and similar solvents
- The plastic material carries U/L recognition 94V-0

Mechanical Data

Case: JEDEC ITO-220AB, molded plastic
Polarity: Color band denotes cathode
Weight: 0.08ounce, 2.24 grams
Mounting position: Any

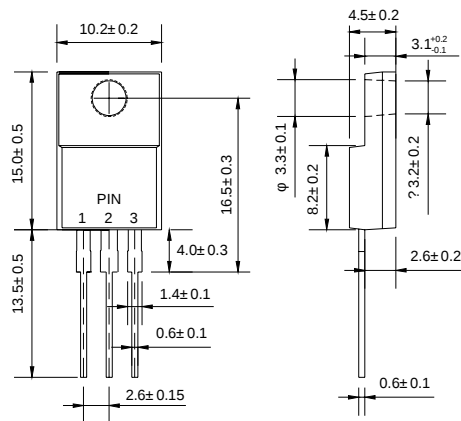

Dimensions in millimeters

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate by 20%.

		MUR 1605FC	MUR 1610FC	MUR 1615FC	MUR 1620FC	MUR 1640FC	MUR 1660FC	UNITS
Maximum recurrent peak reverse voltage	V _{RRM}	50	100	150	200	400	600	V
Maximum RMS voltage	V _{RMS}	35	70	105	140	280	420	V
Maximum DC blocking voltage	V _{DC}	50	100	150	200	400	600	V
Maximum average forward rectified current @T _C =150	I _(AV)	8.0 16						A
Peak forward surge current 8.3ms single half-sine-wave superimposed on rated load	I _{FSM}	100						A
Maximum instantaneous forward voltage	V _F	0.975 0.895				1.30 1.00	1.50 1.20	V
Maximum reverse current at rated DC blocking voltage	I _R	5.0 250				10 500		μA
Maximum reverse recovery time (Note2)	t _{rr}	25				50		ns
Typical thermal resistance junction to case	R _{θJC}	3.0				2.0		/W
Operating junction temperature range	T _j	- 55 ---- + 175						
Storage temperature range	T _{STG}	- 55 ---- + 175						

NOTE: 1. Pulse test: pulse width=300 μs , duty cycle $\leq 2.0\%$.
2. Measured with $I_F=0.5A$, $I_R=1.0A$, $t_{rr}=0.25A$.

Ratings AND Characteristic Curves

FIG.1 –TYPICAL FORWARD CHARACTERISTIC

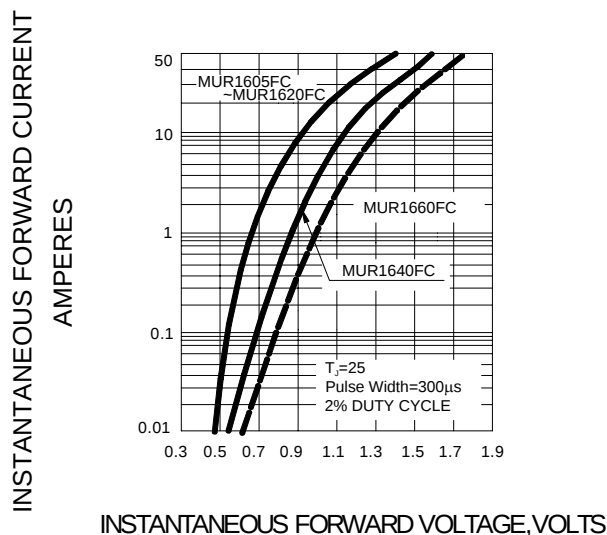


FIG.2-TYPICAL REVERSE CHARACTERISTICS

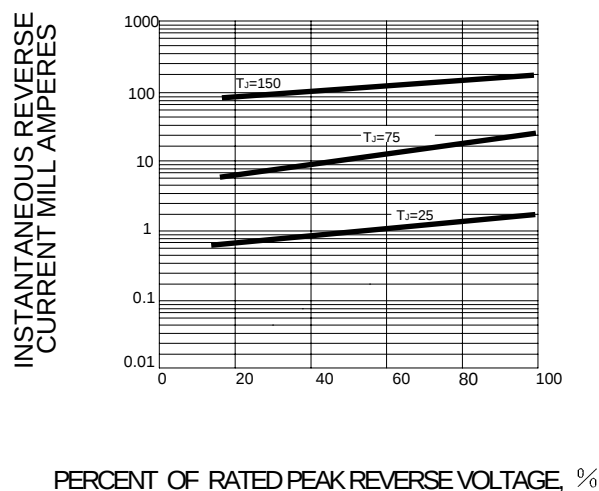


FIG.3 -- PEAK FORWARD SURGE CURRENT

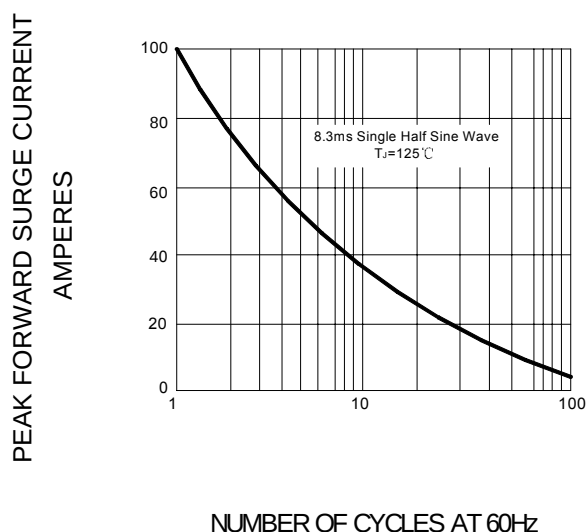


FIG.4 – FORWARD DERATING CURVE

