


Features

- * Ultrafast 50 Nanosecond Recovery Times
- * 175°C Operating Junction Temperature
- * Low Forward Voltage
- * Low Leakage Current
- * High Temperature Glass Passivated Junction



RoHS
COMPLIANT

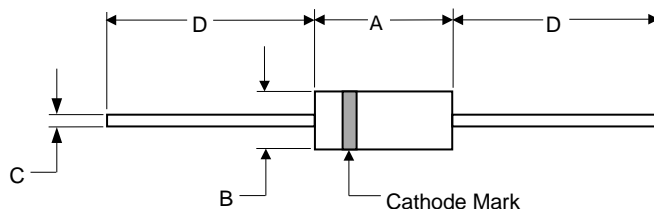

DO-15				
DIM	INCHES		MM	
	MIN	MAX	MIN	MAX
A	0.23	0.3	5.8	7.6
B	0.104	0.14	2.6	3.6
C	0.026	0.034	0.7	0.9
D	1	---	25.4	---

Mechanical Data

- * Case: Epoxy, Molded
- * Weight: 0.4 gram (approximately)
- * Finish: All External Surfaces Corrosion Resistant and Terminal Leads are Readily Solderable
- * Lead and Mounting Surface Temperature for Soldering Purposes: 220°C Max. for 10 Seconds, 1/16", from case
- * Shipped in plastic bags, 1000 per bag
- * Polarity: Cathode Indicated by Polarity Band
- * Marking: MUR260

Maximum Ratings (TA=25°C unless otherwise noted)

Rating	Symbol	Value	Unit
Peak Repetitive Reverse Voltage Working Peak Reverse Voltage DC Blocking Voltage	VRRM VRWM VR	600 —	Volts
Average Rectified Forward Current (Note 1.) (Square Wave Mounting Method #3 Per Note 3.)	IF(AV)	2.0 @ TA = 60°C	Amps
Non-Repetitive Peak Surge Current (Surge applied at rated load conditions, halfwave, single phase, 60 Hz)	IFSM	35	Amps
Operating Junction Temperature and Storage Temperature Range	TJ/ Tstg	–65 to 175	°C

1. Pulse Test: Pulse Width = 300 μ s, Duty Cycle \leq 2.0%.

Thermal Characteristics (T_A=25°C unless otherwise noted)

Characteristic	Symbol	Value	Unit
Maximum Thermal Resistance, Junction to Ambient	R _{θJA}	See Note 3.	°C/W

Electrical Characteristics (T_A=25°C unless otherwise noted)

Characteristic	Symbol	Value	Unit
Maximum Instantaneous Forward Voltage (Note 2.) (I _F = 2.0 Amp, T _J = 150°C) (I _F = 2.0 Amp, T _J = 25°C)	V _F	1.15 1.35	Volts
Maximum Instantaneous Reverse Current (Note 2.) (Rated dc Voltage, T _J = 150°C) (Rated dc Voltage, T _J = 25°C)	I _R	150 5.0	μA
Maximum Reverse Recovery Time (I _F = 1.0 Amp, di/dt = 50 Amp/ s) (I _F = 0.5 Amp, I _R = 1.0 Amp, I _{REC} = 0.25 A)	t _{rr}	75 50	ns
Maximum Forward Recovery Time (I _F = 1.0 A, di/dt = 100 A/ s, I _{REC} to 1.0 V)	t _{fr}	50	ns

2. Pulse Test: Pulse Width = 300 μs, Duty Cycle ≤2.0%.

Ratings and Characteristic Curves

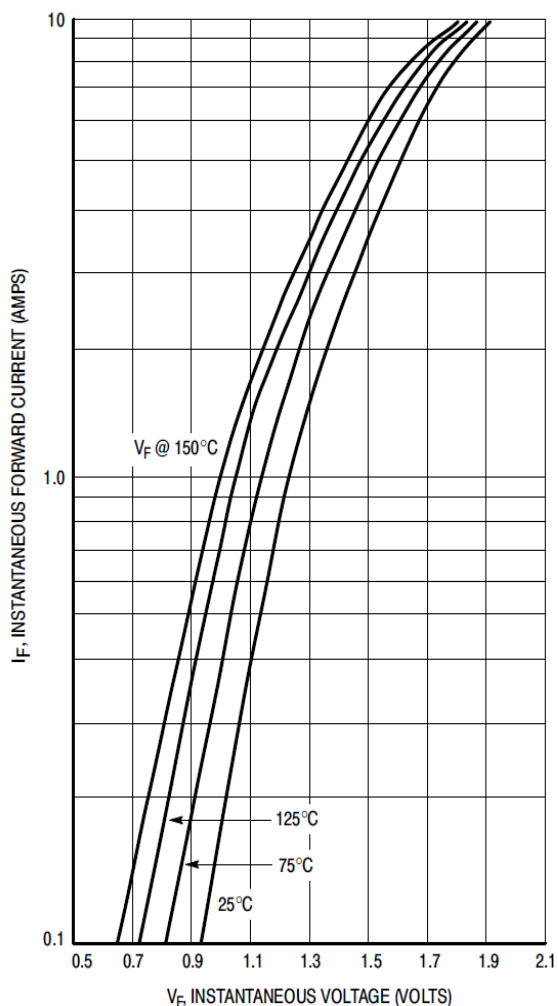


Figure 1. Maximum Forward Voltage

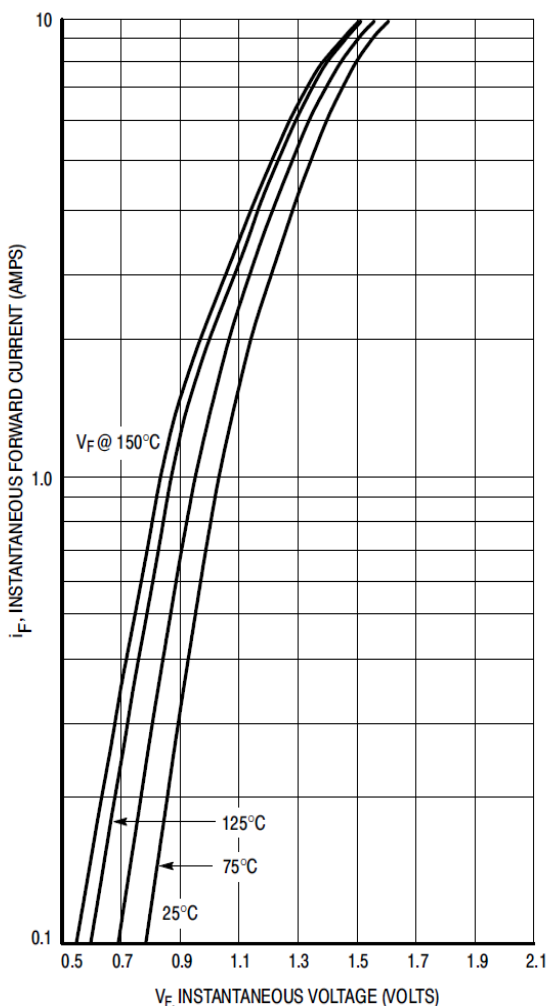


Figure 2. Typical Forward Voltage

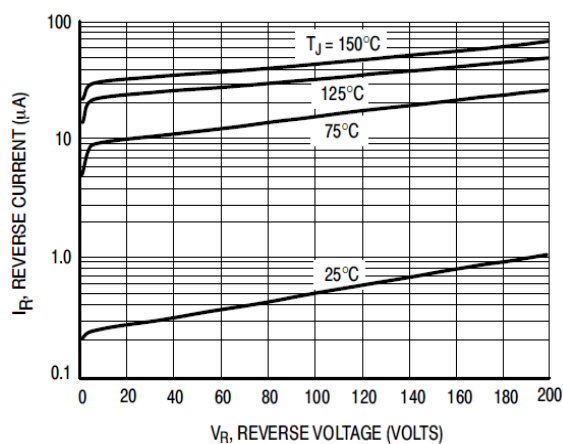


Figure 3. Maximum Reverse Current

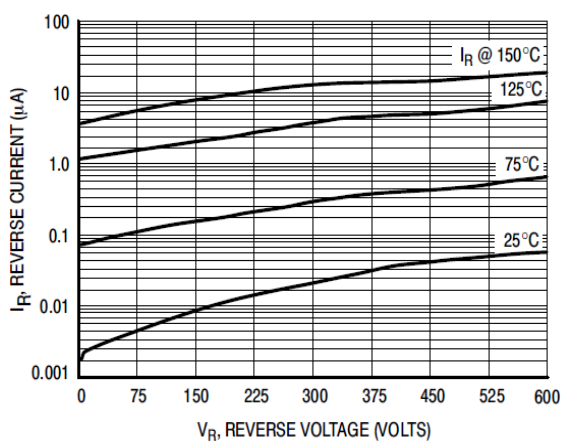


Figure 4. Typical Reverse Current

Ratings and Characteristic Curves

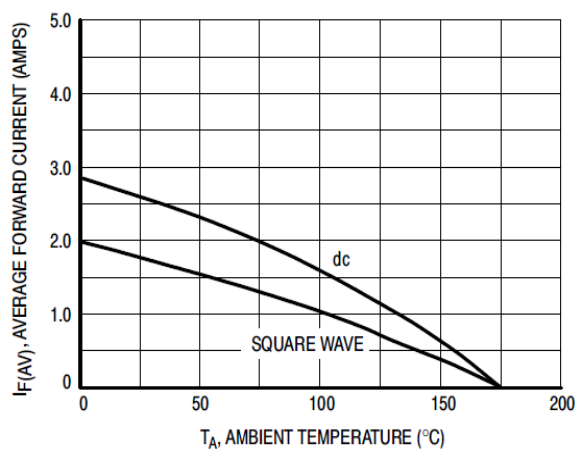


Figure 5. Current Derating

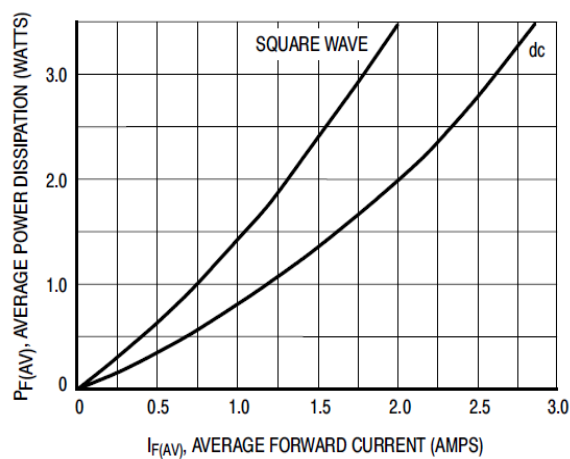


Figure 6. Power Dissipation

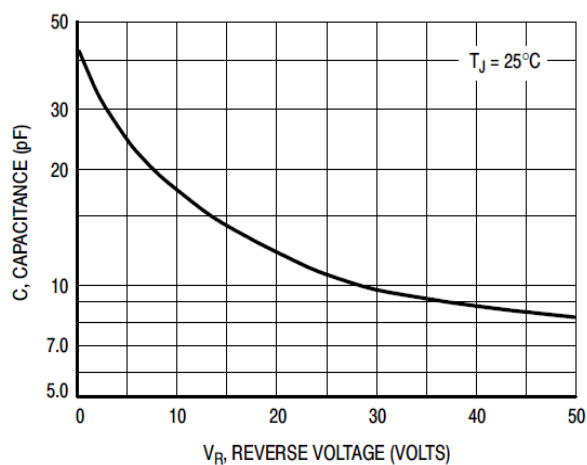


Figure 7. Typical Capacitance



MUR260

ULTRAFAST RECTIFIER 2 AMPERES 600 VOLTS

Ordering Information

Part No.	Package	Packing Code	Packing
MUR260	DO-15	B05	500pcs/Bulk
MUR260	DO-15	A30	3000pcs/Ammo(52mm)
MUR260	DO-15	S30	3000pcs/Ammo(26mm)
MUR260	DO-15	R40	4000pcs/Reel

Disclaimer

Specifications of the products displayed herein are subject to change without notice. JGD or anyone on its behalf, assumes no responsibility or liability for any errors in accuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in JGD's terms and conditions of sale for such products, JGD assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of JGD products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify JGD for any damages resulting from such improper use or sale.