


DESCRIPTION

A yellow and green lamp made of GaAsP, GaP offering a changing color characteristics dependent on the direction the lamp is biased. These two light emitting diodes are mounted in a 5mm diameter dual color, white diffused lens.

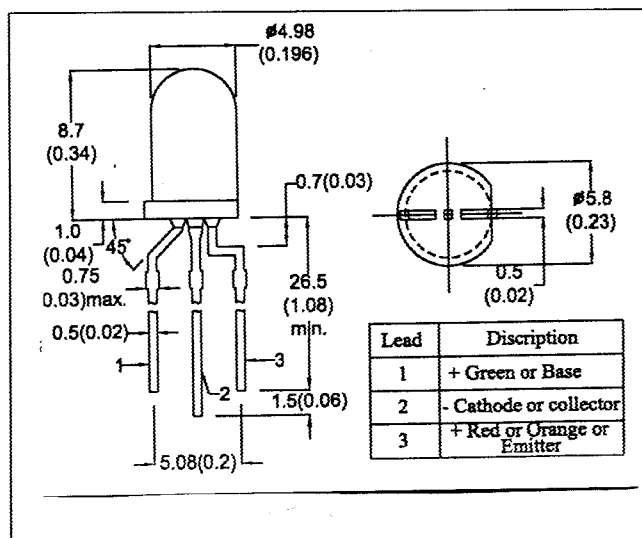

- All dimension in mm(inch)
- No Scale
- Tol. : +/-0.3mm

ABSOLUTE MAXIMUM RATINGS

Power Dissipation @ Ta=25°C

Forward Current, DC (IF)

Reverse Voltage

Operating & Storage Temperature Range

Lead Temperature

YELLOW

60mW

20mA

5V

-55 to +120°C

260°C

GREEN

100mW

30mA

5V

ELECTRO-OPTICAL CHARACTERISTICS

(Ta=25°C)

PARAMETER	SYMBOL	YELLOW	GREEN	UNIT	CONDITIONS
Forward Voltage	MAX VF	3.0	3.0	V	IF=20mA
Reverse Breakdown Voltage	MIN BVR	5	5	V	IR=100 μ A
Luminous Intensity	MIN IV	15	15	mcd	IF=20mA
	TYP	25	30	mcd	IF=20mA
Peak Wavelength	TYP λp	585	570	nm	IF=20mA
Spectral Line Half Width	TYP Δλ	35	30	nm	IF=20mA
Viewing Angle	TYP 2θ 1/2	80	80	degree	IF=20mA



MICRO ELECTRONICS LTD.

38, Hung To Road, Microtron Building, Kwun Tong, Kowloon, Hong Kong.

Kwun Tong P.O. Box 69477 Hong Kong. Fax No. 2341 0321 Telex:43510 Micro Hx. Tel: 2343 0181-5

Nov-98