

TFT LCD Approval Specification

MODEL NO.: N141I1 - L01

Customer: Dell / Wistron

Approved by:

Note:

| Liquid Crystal Display Division |                   |
|---------------------------------|-------------------|
| QRA Division.                   | OA Head Division. |
| Approval                        | Approval          |
|                                 |                   |

**- CONTENTS -**

|                                             |    |
|---------------------------------------------|----|
| REVISION HISTORY                            | 4  |
| 1. GENERAL DESCRIPTION                      | 5  |
| 1.1 OVERVIEW                                |    |
| 1.2 FEATURES                                |    |
| 1.3 APPLICATION                             |    |
| 1.4 GENERAL SPECIFICATIONS                  |    |
| 1.5 MECHANICAL SPECIFICATIONS               |    |
| 2. ABSOLUTE MAXIMUM RATINGS                 | 6  |
| 2.1 ABSOLUTE RATINGS OF ENVIRONMENT         |    |
| 2.2 ELECTRICAL ABSOLUTE RATINGS             |    |
| 2.2.1 TFT LCD MODULE                        |    |
| 2.2.2 BACKLIGHT UNIT                        |    |
| 3. ELECTRICAL CHARACTERISTICS               | 8  |
| 3.1 TFT LCD MODULE                          |    |
| 3.2 BACKLIGHT UNIT                          |    |
| 4. BLOCK DIAGRAM                            | 12 |
| 4.1 TFT LCD MODULE                          |    |
| 4.2 BACKLIGHT UNIT                          |    |
| 5. INPUT TERMINAL PIN ASSIGNMENT            | 13 |
| 5.1 TFT LCD MODULE                          |    |
| 5.2 BACKLIGHT UNIT                          |    |
| 5.3 TIMING DIAGRAM OF LVDS INPUT SIGNAL     |    |
| 5.4 COLOR DATA INPUT ASSIGNMENT             |    |
| 5.5 EDID DATA STRUCTURE                     |    |
| 6. INVERTER SPECIFICATION                   | 19 |
| 6.1 TYPE OF INVERTER CONNECTOR              |    |
| 6.2 BUILT-IN INVERTER INPUT PIN ASSIGNMENT  |    |
| 6.2 BUILT-IN INVERTER OUTPUT PIN ASSIGNMENT |    |
| 6.4 GENERAL ELECTRICAL SPECIFICATION        |    |
| 7. INTERFACE TIMING                         | 24 |
| 7.1 INPUT SIGNAL TIMING SPECIFICATIONS      |    |
| 7.2 POWER ON/OFF SEQUENCE                   |    |
| 8. OPTICAL CHARACTERISTICS                  | 26 |
| 8.1 TEST CONDITIONS                         |    |
| 8.2 OPTICAL SPECIFICATIONS                  |    |
| 9. PRECAUTIONS                              | 30 |
| 9.1 HANDLING PRECAUTIONS                    |    |
| 9.2 STORAGE PRECAUTIONS                     |    |
| 9.3 OPERATION PRECAUTIONS                   |    |
| 10. PACKING                                 | 31 |
| 10.1 CARTON                                 |    |
| 10.2 PALLET                                 |    |



## 11. DEFINITION OF LABELS

11.1 CMO MODULE LABEL

11.2 CMO CARTON LABE

11.3 CARTON LABEL

11.4 PALLET LABEL

33

**CHI MEI**  
OPTOELECTRONICS CORP.

Issued Date: Jan 17, 2006

Model No.: N141I1 - L01

**Approval****REVISION HISTORY**

| Version | Date        | Page<br>(New) | Section | Description                              |
|---------|-------------|---------------|---------|------------------------------------------|
| 3.0     | Jan, 17,'06 | All           | All     | Approval specification was first issued. |

## 1 GENERAL DESCRIPTION

### 1.1 OVERVIEW

N141I1 - L01 is a 14.1" TFT Liquid Crystal Display module with single CCFL Backlight unit and 30 pins LVDS interface. This module supports 1280 x 800 XGA mode and can display 262,144 colors. The optimum viewing angle is at 6 o'clock direction. The inverter module for Backlight is built in.

### 1.2 FEATURES

- Thin and Light Weight
- WXGA (1280 x 800 pixels) resolution
- DE only mode
- 3.3V LVDS (Low Voltage Differential Signaling) interface with 1 pixel/clock

### 1.3 APPLICATION

- TFT LCD Notebook

### 1.4 GENERAL SPECIFICATIONS

| Item               | Specification           | Unit  | Note |
|--------------------|-------------------------|-------|------|
| Active Area        | 303.36(H) X 189.6(V)    | mm    | (1)  |
| Bezel Opening Area | 306.76 (H) x 193.0 (V)  | mm    |      |
| Driver Element     | a-si TFT active matrix  | -     | -    |
| Pixel Number       | 1280 x R.G.B. x 800     | pixel | -    |
| Pixel Pitch        | 0.237 (H) x 0.237 (V)   | mm    | -    |
| Pixel Arrangement  | RGB vertical stripe     | -     | -    |
| Display Colors     | 262,144                 | color | -    |
| Transmissive Mode  | Normally white          | -     | -    |
| Surface Treatment  | Anti-glare, Haze 26, 3H | -     | -    |

### 1.5 MECHANICAL SPECIFICATIONS

| Item        |               | Min. | Typ.  | Max. | Unit | Note |
|-------------|---------------|------|-------|------|------|------|
| Module Size | Horizontal(H) | 319  | 319.5 | 320  | mm   | (1)  |
|             | Vertical(V)   | 205  | 205.5 | 206  | mm   |      |
|             | Depth(D)      | --   | 5.2   | 5.5  | mm   |      |
| Weight      |               | --   | 395   | 410  | g    | (2)  |
|             |               | --   | 410   | 425  | g    | (3)  |

Note (1) Please refer to the attached drawings for more information of front and back outline dimensions.

Note (2) Weight without inverter.

Note (3) Weight with inverter.

## 2 ABSOLUTE MAXIMUM RATINGS

### 2.1 ABSOLUTE RATINGS OF ENVIRONMENT


| Item                          | Symbol           | Value |       | Unit | Note     |
|-------------------------------|------------------|-------|-------|------|----------|
|                               |                  | Min.  | Max.  |      |          |
| Storage Temperature           | T <sub>ST</sub>  | -20   | +60   | °C   | (1)      |
| Operating Ambient Temperature | T <sub>OP</sub>  | 0     | +50   | °C   | (1), (2) |
| Shock (Non-Operating)         | S <sub>NOP</sub> | -     | 220/2 | G/ms | (3), (5) |
| Vibration (Non-Operating)     | V <sub>NOP</sub> | -     | 1.5   | G    | (4), (5) |

Note (1) (a) 90 %RH Max. (Ta ≤ 40 °C).

(b) Wet-bulb temperature should be 39 °C Max. (Ta > 40 °C).

(c) No condensation.

Note (2) The temperature of panel display surface area should be 0 °C Min. and 60 °C Max..

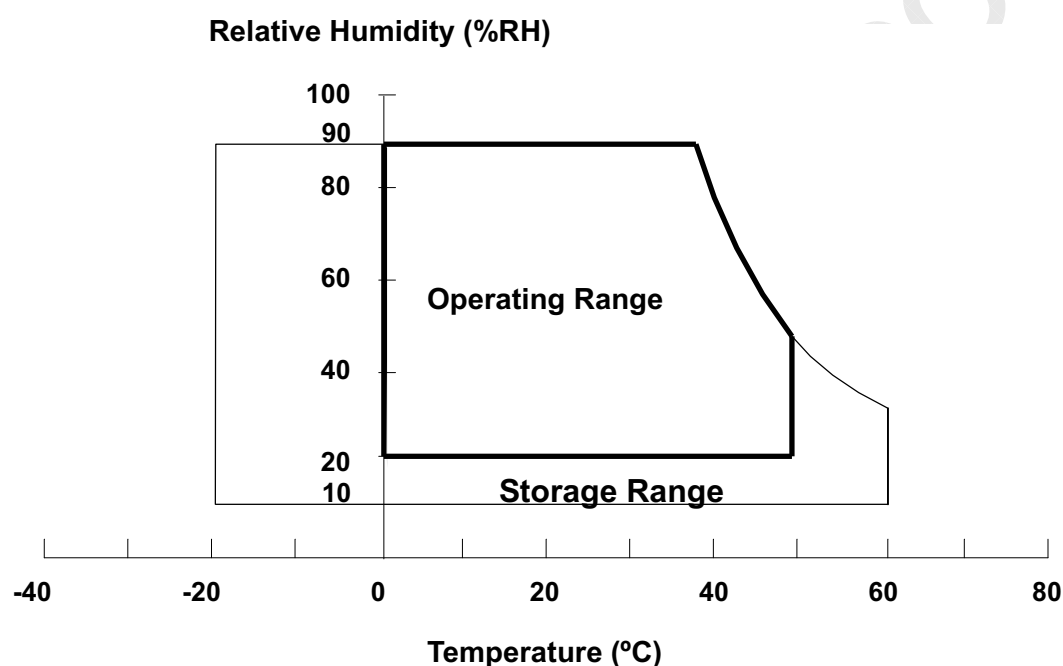


Note (3) 1 time for ± X, ± Y, ± Z. for Condition (220G / 2ms) is half Sine Wave,.

Note (4) 10 ~ 300 Hz, 10 min / Cycle, 3 cycles for each X, Y, Z axis.

Note (5) At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

The fixing condition is shown as below:

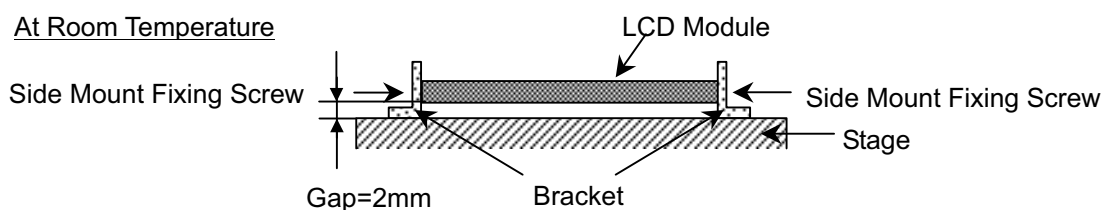

## 2.2 ELECTRICAL ABSOLUTE RATINGS

### 2.2.1 TFT LCD MODULE

| Item                 | Symbol   | Value |              | Unit | Note |
|----------------------|----------|-------|--------------|------|------|
|                      |          | Min.  | Max.         |      |      |
| Power Supply Voltage | $V_{CC}$ | -0.3  | +4.0         | V    | (1)  |
| Logic Input Voltage  | $V_{IN}$ | -0.3  | $V_{CC}+0.3$ | V    |      |

### 2.2.2 BACKLIGHT UNIT

| Item           | Symbol | Value |      | Unit       | Note     |
|----------------|--------|-------|------|------------|----------|
|                |        | Min.  | Max. |            |          |
| Lamp Voltage   | $V_L$  | -     | 2.5K | $V_{RMS}$  | (1), (2) |
| Lamp Current   | $I_L$  | 2.0   | 6.5  | $mA_{RMS}$ | (1), (2) |
| Lamp Frequency | $F_L$  | 45    | 80   | KHz        |          |

Note (1) Permanent damage to the device may occur if maximum values are exceeded. Function operation should be restricted to the conditions described under Normal Operating Conditions.

Note (2) Specified values are for lamp (Refer to 3.2 for further information).

### 3 ELECTRICAL CHARACTERISTICS


#### 3.1 TFT LCD MODULE

 $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$ 


| Parameter             | Symbol     | Value    |      |      | Unit | Note |
|-----------------------|------------|----------|------|------|------|------|
|                       |            | Min.     | Typ. | Max. |      |      |
| Power Supply Voltage  | $V_{CC}$   | 3.0      | 3.3  | 3.6  | V    | -    |
| Ripple Voltage        | $V_{RP}$   | -        | -    | 100  | mV   | -    |
| Rush Current          | $I_{RUSH}$ | -        | -    | 1.5  | A    | (2)  |
| Power Supply Current  | White      | $I_{CC}$ | 280  | 310  | mA   | (3)a |
|                       | Black      |          | 350  | 400  | mA   | (3)b |
| Logical Input Voltage | "H" Level  | $V_{IL}$ | -    | -    | mV   | -    |
|                       | "L" Level  | $V_{IH}$ | -100 | -    | mV   | -    |
| Terminating Resistor  | $R_T$      | -        | 100  | -    | Ohm  | -    |
| Power per EBL WG      | $P_{EBL}$  | -        | 2.97 | -    | W    | (4)  |

Note (1) The module should be always operated within above ranges.

Note (2) Measurement Conditions:

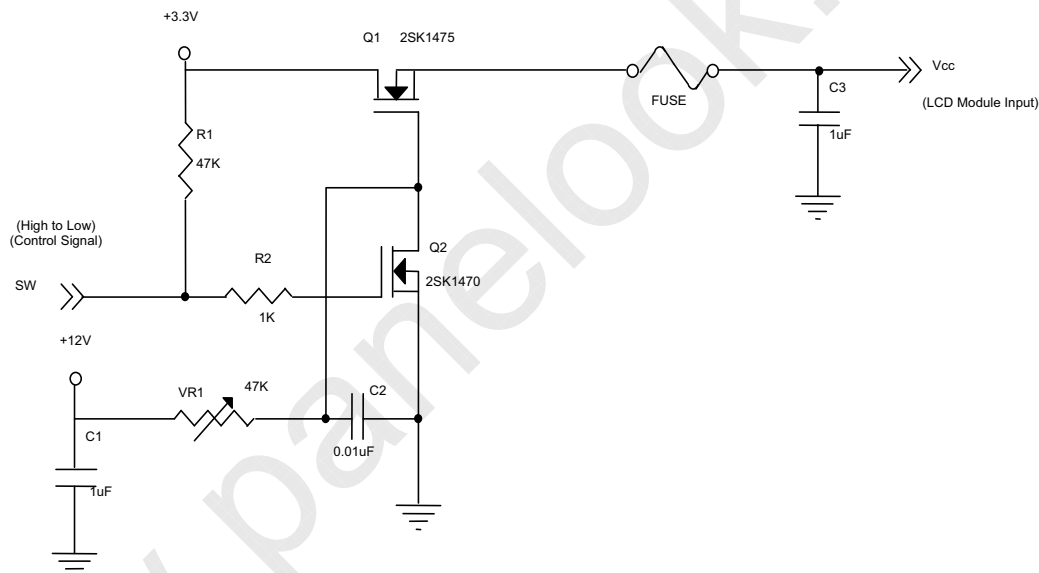

**Vcc rising time is 470us**

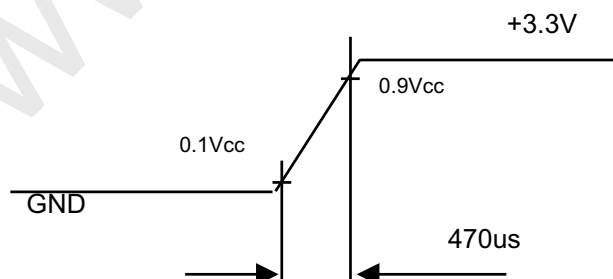

Note (3) The specified power supply current is under the conditions at  $V_{CC} = 3.3 \text{ V}$ ,  $T_a = 25 \pm 2 \text{ }^{\circ}\text{C}$ ,  $f_v = 60 \text{ Hz}$ , whereas a power dissipation check pattern below is displayed.




a. White Pattern



Active Area

b. Black Pattern



Active Area

Note (4) The specified power are the sum of LCD panel electronics input power and the inverter input power. Test conditions are as follows.

(a)  $V_{cc} = 3.3\text{ V}$ ,  $T_a = 25 \pm 2\text{ }^{\circ}\text{C}$ ,  $f_v = 60\text{ Hz}$ ,

(b) The pattern used is a black and white 32 x 36 checkerboard, slide #100 from the VESA file "Flat Panel Display Monitor Setup Patterns", FPDMSU.ppt.

(c) Luminance: 60 nits.


(d) The inverter used is provided from Sumida (www.sumida.com.tw). Please contact Sumida for detail information. CMO provides the inverter in this product.

## 3.2 BACKLIGHT UNIT

Ta = 25 ± 2 °C

| Parameter            | Symbol          | Value  |      |              | Unit              | Note                         |
|----------------------|-----------------|--------|------|--------------|-------------------|------------------------------|
|                      |                 | Min.   | Typ. | Max.         |                   |                              |
| Lamp Input Voltage   | V <sub>L</sub>  | 612    | 680  | 748          | V <sub>RMS</sub>  | I <sub>L</sub> = 6.0 mA      |
| Lamp Current         | I <sub>L</sub>  | 2.0    | 6.0  | 6.5          | mA <sub>RMS</sub> | (1)                          |
| Lamp Turn On Voltage | V <sub>s</sub>  | -      | -    | 1370 (25 °C) | V <sub>RMS</sub>  | (2)                          |
|                      |                 | -      | -    | 1520 (0 °C)  | V <sub>RMS</sub>  | (2)                          |
| Operating Frequency  | F <sub>L</sub>  | 45     | -    | 80           | KHz               | (3)                          |
| Lamp Life Time       | L <sub>BL</sub> | 15,000 | -    | -            | Hrs               | (5)                          |
| Power Consumption    | P <sub>L</sub>  | -      | 4.08 | -            | W                 | (4), I <sub>L</sub> = 6.0 mA |

Note (1) Lamp current is measured by utilizing a high frequency current meter as shown below:

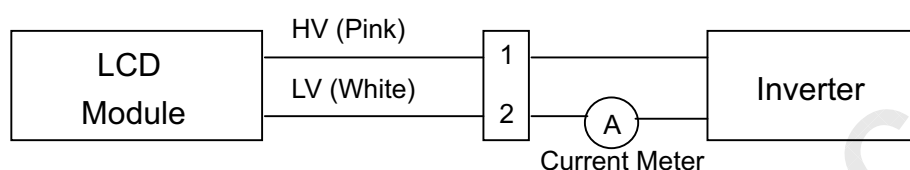

Note (2) The voltage that must be larger than V<sub>s</sub> should be applied to the lamp for more than 1 second after startup. Otherwise the lamp may not be turned on.

Note (3) The lamp frequency may produce interference with horizontal synchronous frequency from the display, and this may cause line flow on the display. In order to avoid interference, the lamp frequency should be detached from the horizontal synchronous frequency and its harmonics as far as possible.

Note (4)  $P_L = I_L \times V_L$

Note (5) The lifetime of lamp can be defined as the time in which it continues to operate under the condition Ta = 25 ± 2 °C and I<sub>L</sub> = 6 mA<sub>RMS</sub> until one of the following events occurs:

- (a) When the brightness becomes or lower than 50% of its original value.
- (b) When the effective ignition length becomes or lower than 80% of its original value. (Effective ignition length is defined as an area that has less than 70% brightness compared to the brightness in the center point.)


Note (6) The waveform of the voltage output of inverter must be area-symmetric and the design of the inverter must have specifications for the modularized lamp. The performance of the Backlight, such as lifetime or brightness, is greatly influenced by the characteristics of the DC-AC inverter for the lamp. All the parameters of an inverter should be carefully designed to avoid producing too much current leakage from high voltage output of the inverter. When designing or ordering the inverter please make sure that a poor lighting caused by the mismatch of the Backlight and the inverter (miss-lighting, flicker, etc.) never occurs. If the above situation is confirmed, the module should be operated in the same manners when it is installed in your instrument.

The output of the inverter must have symmetrical (negative and positive) voltage waveform and symmetrical current waveform.(Unsymmetrical ratio is less than 5%) Please do not use the inverter

which has unsymmetrical voltage and unsymmetrical current and spike wave. Lamp frequency may produce interface with horizontal synchronous frequency and as a result this may cause beat on the display. Therefore lamp frequency shall be as away possible from the horizontal synchronous frequency and from its harmonics in order to prevent interference.

Requirements for a system inverter design, which is intended to have a better display performance, a better power efficiency and a more reliable lamp. It shall help increase the lamp lifetime and reduce its leakage current.

- The asymmetry rate of the inverter waveform should be 5% below.
- The distortion rate of the waveform should be within  $\sqrt{2} \pm 10\%$ .
- The ideal sine wave form shall be symmetric in positive and negative polarities.

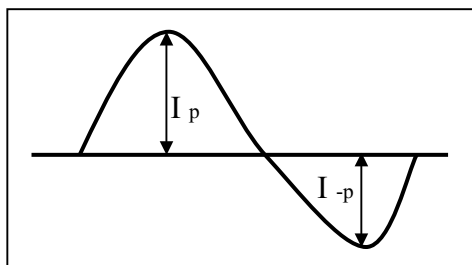

\* Asymmetry rate:


$$|I_p - I_{-p}| / \text{Max}(I_p, I_{-p}) * 100\%$$

\* Distortion rate

$$I_p \text{ (or } I_{-p}) / I_{\text{rms}}$$

## 4 BLOCK DIAGRAM

### 4.1 TFT LCD MODULE

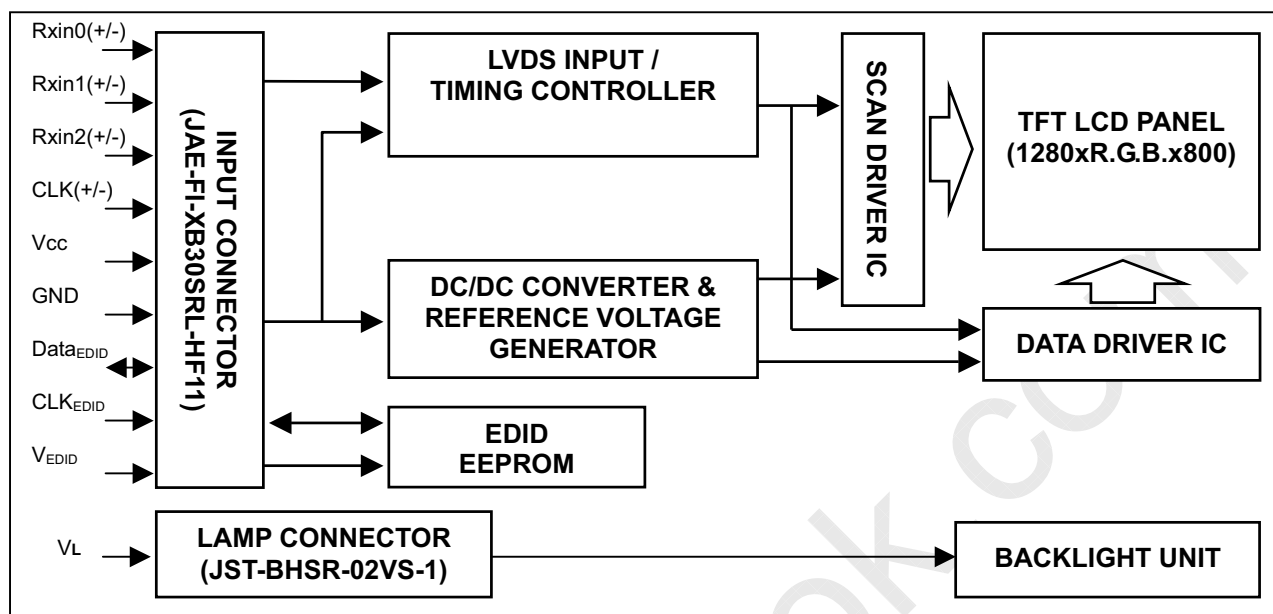

### 4.2 BACKLIGHT UNIT





## 5 INPUT TERMINAL PIN ASSIGNMENT

### 5.1 TFT LCD MODULE

| Pin | Symbol               | Description                   | Polarity | Remark                  |
|-----|----------------------|-------------------------------|----------|-------------------------|
| 1   | Vss                  | Ground                        |          |                         |
| 2   | Vcc                  | Power Supply +3.3 V (typical) |          |                         |
| 3   | Vcc                  | Power Supply +3.3 V (typical) |          |                         |
| 4   | V <sub>EDID</sub>    | DDC 3.3V Power                |          | DDC 3.3V Power          |
| 5   | BIST                 | Panel BIST enable             |          |                         |
| 6   | CLK <sub>EDID</sub>  | DDC Clock                     |          | DDC Clock               |
| 7   | DATA <sub>EDID</sub> | DDC Data                      |          | DDC Data                |
| 8   | Rxin0-               | LVDS Differential Data Input  | Negative | R0~R5, G0               |
| 9   | Rxin0+               | LVDS Differential Data Input  | Positive |                         |
| 10  | Vss                  | Ground                        |          |                         |
| 11  | Rxin1-               | LVDS Differential Data Input  | Negative | G1~G5, B0, B1           |
| 12  | Rxin1+               | LVDS Differential Data Input  | Positive |                         |
| 13  | Vss                  | Ground                        |          |                         |
| 14  | Rxin2-               | LVDS Differential Data Input  | Negative | B2~B5, DE, Hsync, Vsync |
| 15  | Rxin2+               | LVDS Differential Data Input  | Positive |                         |
| 16  | Vss                  | Ground                        |          |                         |
| 17  | CLK-                 | LVDS Clock Data Input         | Negative | LVDS Level Clock        |
| 18  | CLK+                 | LVDS Clock Data Input         | Positive |                         |
| 19  | Vss                  | Ground                        |          |                         |
| 20  | NC                   | Non-Connection                |          |                         |
| 21  | NC                   | Non-Connection                |          |                         |
| 22  | NC                   | Non-Connection                |          |                         |
| 23  | NC                   | Non-Connection                |          |                         |
| 24  | NC                   | Non-Connection                |          |                         |
| 25  | NC                   | Non-Connection                |          |                         |
| 26  | NC                   | Non-Connection                |          |                         |
| 27  | NC                   | Non-Connection                |          |                         |
| 28  | NC                   | Non-Connection                |          |                         |
| 29  | NC                   | Non-Connection                |          |                         |
| 30  | NC                   | Non-Connection                |          |                         |

Note (1) Connector Part No.: JAE-FI-XB30SRL-HF11 or equivalent

Note (2) User's connector Part No: FI-X30C2L or equivalent


### 5.2 BACKLIGHT UNIT

| Pin | Symbol | Description  | Color |
|-----|--------|--------------|-------|
| 1   | HV     | High Voltage | Pink  |
| 2   | LV     | Ground       | White |

Note (1) Connector Part No.: JST- BHSR-02VS-1 or equivalent

Note (2) User's connector Part No.: SM02B-BHSS-1-TB or equivalent

## 5.3 TIMING DIAGRAM OF LVDS INPUT SIGNAL

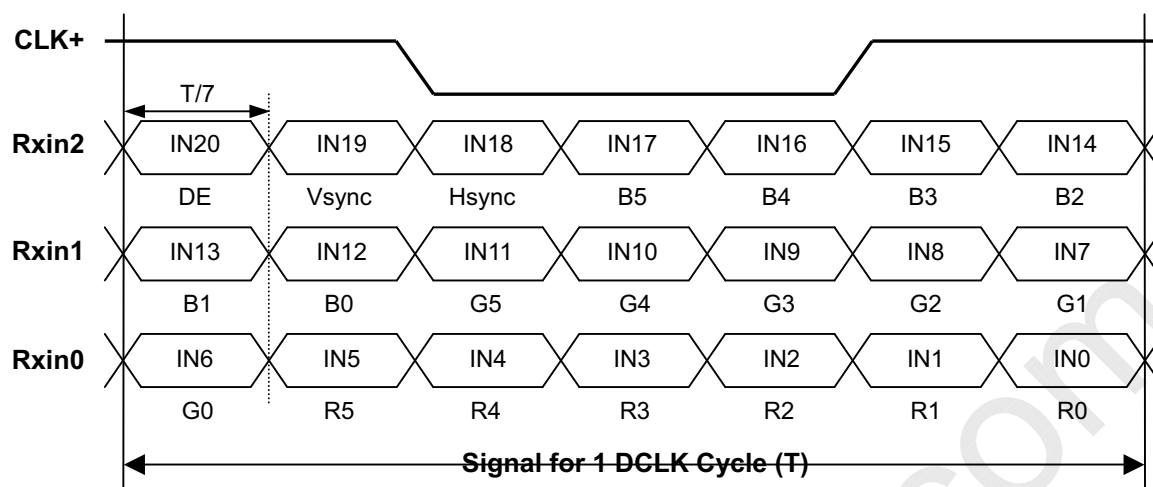



## 5.4 COLOR DATA INPUT ASSIGNMENT

The brightness of each primary color (red, green and blue) is based on the 6-bit gray scale data input for the color. The higher the binary input, the brighter the color. The table below provides the assignment of color versus data input.

| Color               |               | Data Signal |    |    |    |    |    |       |    |    |    |    |    |      |    |    |    |    |    |
|---------------------|---------------|-------------|----|----|----|----|----|-------|----|----|----|----|----|------|----|----|----|----|----|
|                     |               | Red         |    |    |    |    |    | Green |    |    |    |    |    | Blue |    |    |    |    |    |
|                     |               | R5          | R4 | R3 | R2 | R1 | R0 | G5    | G4 | G3 | G2 | G1 | G0 | B5   | B4 | B3 | B2 | B1 | B0 |
| Basic Colors        | Black         | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red           | 1           | 1  | 1  | 1  | 1  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green         | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 1  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Blue          | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 1  | 1    | 1  | 1  | 1  | 1  | 1  |
|                     | Cyan          | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 1  | 1  | 1    | 1  | 1  | 1  | 1  | 1  |
|                     | Magenta       | 1           | 1  | 1  | 1  | 1  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 1    | 1  | 1  | 1  | 1  | 1  |
|                     | Yellow        | 1           | 1  | 1  | 1  | 1  | 1  | 1     | 1  | 1  | 1  | 1  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | White         | 1           | 1  | 1  | 1  | 1  | 1  | 1     | 1  | 1  | 1  | 1  | 1  | 1    | 1  | 1  | 1  | 1  | 1  |
| Gray Scale Of Red   | Red(0)/Dark   | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red(1)        | 0           | 0  | 0  | 0  | 0  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red(2)        | 0           | 0  | 0  | 0  | 1  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | Red(61)       | 1           | 1  | 1  | 1  | 0  | 1  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Red(62)       | 1           | 1  | 1  | 1  | 1  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
| Red(63)             | 1             | 1           | 1  | 1  | 1  | 1  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  |    |
| Gray Scale Of Green | Green(0)/Dark | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green(1)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 1  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green(2)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 1  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | Green(61)     | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 0  | 1  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Green(62)     | 0           | 0  | 0  | 0  | 0  | 0  | 1     | 1  | 1  | 1  | 1  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
| Green(63)           | 0             | 0           | 0  | 0  | 0  | 0  | 1  | 1     | 1  | 1  | 1  | 1  | 0  | 0    | 0  | 0  | 0  | 0  |    |
| Gray Scale Of Blue  | Blue(0)/Dark  | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 0  |
|                     | Blue(1)       | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 0  | 1  |
|                     | Blue(2)       | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 0  | 0    | 0  | 0  | 0  | 1  | 0  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | :             | :           | :  | :  | :  | :  | :  | :     | :  | :  | :  | :  | :  | :    | :  | :  | :  | :  | :  |
|                     | Blue(61)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 1  | 1    | 1  | 1  | 0  | 1  | 0  |
|                     | Blue(62)      | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 0  | 1  | 1    | 1  | 1  | 1  | 0  | 0  |
| Blue(63)            | 0             | 0           | 0  | 0  | 0  | 0  | 0  | 0     | 0  | 0  | 0  | 1  | 1  | 1    | 1  | 1  | 1  | 1  |    |

Note (1) 0: Low Level Voltage, 1: High Level Voltage

## 5.5 EDID DATA STRUCTURE

The EDID (Extended Display Identification Data) data formats are to support displays as defined in the VESA Plug & Display and FPD1 standards.

| Byte #<br>(decimal) | Byte<br>#(hex) | Field Name and Comments                      | Value<br>(hex) | Value<br>(binary) |
|---------------------|----------------|----------------------------------------------|----------------|-------------------|
| 0                   | 0              | Header                                       | 00             | 00000000          |
| 1                   | 1              | Header                                       | FF             | 11111111          |
| 2                   | 2              | Header                                       | FF             | 11111111          |
| 3                   | 3              | Header                                       | FF             | 11111111          |
| 4                   | 4              | Header                                       | FF             | 11111111          |
| 5                   | 5              | Header                                       | FF             | 11111111          |
| 6                   | 6              | Header                                       | FF             | 11111111          |
| 7                   | 7              | Header                                       | 00             | 00000000          |
| 8                   | 8              | EISA ID manufacturer name ("CMO")            | 0D             | 00001101          |
| 9                   | 9              | EISA ID manufacturer name (Compressed ASCII) | AF             | 10101111          |
| 10                  | 0A             | ID product code (N141I1-L01)                 | 06             | 00000110          |
| 11                  | 0B             | ID product code (hex LSB first; N141I1-L01)  | 14             | 00010100          |
| 12                  | 0C             | ID S/N (fixed "0")                           | 00             | 00000000          |
| 13                  | 0D             | ID S/N (fixed "0")                           | 00             | 00000000          |
| 14                  | 0E             | ID S/N (fixed "0")                           | 00             | 00000000          |
| 15                  | 0F             | ID S/N (fixed "0")                           | 00             | 00000000          |
| 16                  | 10             | Week of manufacture (fixed "00H")            | 00             | 00000000          |
| 17                  | 11             | Year of manufacture (fixed "00H")            | 00             | 00000000          |
| 18                  | 12             | EDID structure version # ("1")               | 01             | 00000001          |
| 19                  | 13             | EDID revision # ("3")                        | 03             | 00000011          |
| 20                  | 14             | Video I/P definition ("digital")             | 80             | 10000000          |
| 21                  | 15             | Active area horizontal 30.336cm              | 1E             | 00011110          |
| 22                  | 16             | Active area vertical 18.96cm                 | 13             | 00010011          |
| 23                  | 17             | Display Gamma (Gamma = "2.2")                | 78             | 01111000          |
| 24                  | 18             | Feature support ("Active off, RGB Color")    | 0A             | 00001010          |
| 25                  | 19             | Rx1 Rx0 Ry1 Ry0 Gx1 Gx0 Gy1 Gy0              | 9F             | 10011111          |
| 26                  | 1A             | Bx1 Bx0 By1 By0 Wx1 Wx0 Wy1 Wy0              | 05             | 00000101          |
| 27                  | 1B             | Rx=0.588                                     | 96             | 10010110          |
| 28                  | 1C             | Ry=0.337                                     | 56             | 01010110          |
| 29                  | 1D             | Gx=0.315                                     | 50             | 01010000          |
| 30                  | 1E             | Gy=0.534                                     | 88             | 10001000          |
| 31                  | 1F             | Bx=0.152                                     | 27             | 00100111          |
| 32                  | 20             | By=0.125                                     | 20             | 00100000          |
| 33                  | 21             | Wx=0.313                                     | 50             | 01010000          |
| 34                  | 22             | Wy=0.329                                     | 54             | 01010100          |
| 35                  | 23             | Established timings 1                        | 00             | 00000000          |
| 36                  | 24             | Established timings 2 (1280*800@60Hz)        | 00             | 00000000          |
| 37                  | 25             | Manufacturer's reserved timings              | 00             | 00000000          |
| 38                  | 26             | Standard timing ID # 1                       | 01             | 00000001          |
| 39                  | 27             | Standard timing ID # 1                       | 01             | 00000001          |
| 40                  | 28             | Standard timing ID # 2                       | 01             | 00000001          |
| 41                  | 29             | Standard timing ID # 2                       | 01             | 00000001          |



|    |    |                                                                                                                                                          |    |          |
|----|----|----------------------------------------------------------------------------------------------------------------------------------------------------------|----|----------|
| 42 | 2A | Standard timing ID # 3                                                                                                                                   | 01 | 00000001 |
| 43 | 2B | Standard timing ID # 3                                                                                                                                   | 01 | 00000001 |
| 44 | 2C | Standard timing ID # 4                                                                                                                                   | 01 | 00000001 |
| 45 | 2D | Standard timing ID # 4                                                                                                                                   | 01 | 00000001 |
| 46 | 2E | Standard timing ID # 5                                                                                                                                   | 01 | 00000001 |
| 47 | 2F | Standard timing ID # 5                                                                                                                                   | 01 | 00000001 |
| 48 | 30 | Standard timing ID # 6                                                                                                                                   | 01 | 00000001 |
| 49 | 31 | Standard timing ID # 6                                                                                                                                   | 01 | 00000001 |
| 50 | 32 | Standard timing ID # 7                                                                                                                                   | 01 | 00000001 |
| 51 | 33 | Standard timing ID # 7                                                                                                                                   | 01 | 00000001 |
| 52 | 34 | Standard timing ID # 8                                                                                                                                   | 01 | 00000001 |
| 53 | 35 | Standard timing ID # 8                                                                                                                                   | 01 | 00000001 |
| 54 | 36 | Detailed timing description # 1 Pixel clock ("71MHz", According to VESA CVT Rev1.1)                                                                      | BC | 10111100 |
| 55 | 37 | # 1 Pixel clock (hex LSB first)                                                                                                                          | 1B | 00011011 |
| 56 | 38 | # 1 H active ("1280")                                                                                                                                    | 00 | 00000000 |
| 57 | 39 | # 1 H blank ("160")                                                                                                                                      | A0 | 10100000 |
| 58 | 3A | # 1 H active : H blank ("1280 : 160")                                                                                                                    | 50 | 01010000 |
| 59 | 3B | # 1 V active ("800")                                                                                                                                     | 20 | 00100000 |
| 60 | 3C | # 1 V blank ("23")                                                                                                                                       | 17 | 00010111 |
| 61 | 3D | # 1 V active : V blank ("800 : 23")                                                                                                                      | 30 | 00110000 |
| 62 | 3E | # 1 H sync offset ("48")                                                                                                                                 | 30 | 00110000 |
| 63 | 3F | # 1 H sync pulse width ("32")                                                                                                                            | 20 | 00100000 |
| 64 | 40 | # 1 V sync offset : V sync pulse width ("3 : 6")                                                                                                         | 36 | 00110110 |
| 65 | 41 | # 1 H sync offset : H sync pulse width : V sync offset : V sync width ("48: 32 : 3 : 6")                                                                 | 00 | 00000000 |
| 66 | 42 | # 1 H image size ("303 mm")                                                                                                                              | 2F | 00101111 |
| 67 | 43 | # 1 V image size ("190 mm")                                                                                                                              | BE | 10111110 |
| 68 | 44 | # 1 H image size : V image size ("303 : 190")                                                                                                            | 10 | 00010000 |
| 69 | 45 | # 1 H boarder ("0")                                                                                                                                      | 00 | 00000000 |
| 70 | 46 | # 1 V boarder ("0")                                                                                                                                      | 00 | 00000000 |
| 71 | 47 | # 1 Non-interlaced, Normal, no stereo, Separate sync, H/V pol Negatives, DE only note: LSB is set to "1" if panel is DE-timing only. H/V can be ignored. | 18 | 00011000 |
| 72 | 48 | Detailed timing description # 2 Pixel clock ("58.75 MHz", According to VESA CVT Rev1.1)                                                                  | F3 | 11110011 |
| 73 | 49 | # 2 Pixel clock (hex LSB first)                                                                                                                          | 16 | 00010110 |
| 74 | 4A | # 2 H active ("1280")                                                                                                                                    | 00 | 00000000 |
| 75 | 4B | # 2 H blank ("160")                                                                                                                                      | A0 | 10100000 |
| 76 | 4C | # 2 H active : H blank ("1280 : 160")                                                                                                                    | 50 | 01010000 |
| 77 | 4D | # 2 V active ("800")                                                                                                                                     | 20 | 00100000 |
| 78 | 4E | # 2 V blank ("19")                                                                                                                                       | 13 | 00010011 |
| 79 | 4F | # 2 V active : V blank ("800 : 19")                                                                                                                      | 30 | 00110000 |
| 80 | 50 | # 2 H sync offset ("48")                                                                                                                                 | 30 | 00110000 |
| 81 | 51 | # 2 H sync pulse width ("32")                                                                                                                            | 20 | 00100000 |
| 82 | 52 | # 2 V sync offset : V sync pulse width ("3 : 6")                                                                                                         | 36 | 00110110 |
| 83 | 53 | # 2 H sync offset : H sync pulse width : V sync offset : V sync width ("48 : 32 : 3 : 6")                                                                | 00 | 00000000 |
| 84 | 54 | # 2 H image size ("303 mm")                                                                                                                              | 2F | 00101111 |



|     |    |                                                                                              |    |          |
|-----|----|----------------------------------------------------------------------------------------------|----|----------|
| 85  | 55 | # 2 V image size ("190 mm")                                                                  | BE | 10111110 |
| 86  | 56 | # 2 H image size : V image size ("303 : 190")                                                | 10 | 00010000 |
| 87  | 57 | # 2 H boarder ("0")                                                                          | 00 | 00000000 |
| 88  | 58 | # 2 V boarder ("0")                                                                          | 00 | 00000000 |
| 89  | 59 | Module "A" Revision =                      Example: 00, 01, 02, 03, etc.                     | 00 | 00000000 |
| 90  | 5A | Detailed timing description # 3                                                              | 00 | 00000000 |
| 91  | 5B | # 3 Flag                                                                                     | 00 | 00000000 |
| 92  | 5C | # 3 Reserved                                                                                 | 00 | 00000000 |
| 93  | 5D | # 3 FE (hex) defines ASCII string (Model Name "N141I1", ASCII)                               | FE | 11111110 |
| 94  | 5E | # 3 Flag                                                                                     | 00 | 00000000 |
| 95  | 5F | # Dell P/N "HD981" 1st character ("H")                                                       | 48 | 01001000 |
| 96  | 60 | # Dell P/N " HD981" 1st character ("D")                                                      | 44 | 01000100 |
| 97  | 61 | # Dell P/N " HD981" 1st character ("9")                                                      | 39 | 00111001 |
| 98  | 62 | # Dell P/N " HD981" 1st character ("8")                                                      | 38 | 00111000 |
| 99  | 63 | # Dell P/N " HD981" 1st character ("1")                                                      | 31 | 00110001 |
| 100 | 64 | LCD Supplier EEDID Revision #: "3"                                                           | 33 | 00110011 |
| 101 | 65 | Manufacturer P/N ( "N")                                                                      | 4E | 01001110 |
| 102 | 66 | Manufacturer P/N ( "1" )                                                                     | 31 | 00110001 |
| 103 | 67 | Manufacturer P/N ( "4" )                                                                     | 34 | 00110100 |
| 104 | 68 | Manufacturer P/N ( "1" )                                                                     | 31 | 00110001 |
| 105 | 69 | Manufacturer P/N ( "I" )                                                                     | 49 | 01001001 |
| 106 | 6A | Manufacturer P/N ( "1" )                                                                     | 31 | 00110001 |
| 107 | 6B | Manufacturer P/N (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h) | 0A | 00001010 |
| 108 | 6C | Flag                                                                                         | 00 | 00000000 |
| 109 | 6D | Flag                                                                                         | 00 | 00000000 |
| 110 | 6E | Flag                                                                                         | 00 | 00000000 |
| 111 | 6F | Data Type Tag:                                                                               | FE | 11111110 |
| 112 | 70 | Flag                                                                                         | 00 | 00000000 |
| 113 | 71 | SMBUS value @ 10nits = 255d                                                                  | FF | 11111111 |
| 114 | 72 | SMBUS value @ 17nits = 236d                                                                  | EC | 11101100 |
| 115 | 73 | SMBUS value @ 24nits = 219d                                                                  | DB | 11011011 |
| 116 | 74 | SMBUS value @ 30nits = 209d                                                                  | D1 | 11010001 |
| 117 | 75 | SMBUS value @ 60nits = 169d                                                                  | A9 | 10101001 |
| 118 | 76 | SMBUS value @ 110nits = 125d                                                                 | 7D | 01111101 |
| 119 | 77 | SMBUS value @ 150nits = 89d                                                                  | 59 | 01011001 |
| 120 | 78 | SMBUS value @ 218nits = 0d                                                                   | 00 | 00000000 |
| 121 | 79 | Numbers of LVDS Receiver chip = 1                                                            | 01 | 00000001 |
| 122 | 7A | BIST Enable: Yes = '01' No = '00' ("Yes")                                                    | 01 | 00000001 |
| 123 | 7B | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)                  | 0A | 00001010 |
| 124 | 7C | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)                  | 20 | 00100000 |
| 125 | 7D | (If <13 char, then terminate with ASCII code 0Ah, set remaining char = 20h)                  | 20 | 00100000 |
| 126 | 7E | Extension flag                                                                               | 00 | 00000000 |
| 127 | 7F | Checksum                                                                                     | C7 | 11000111 |

## 6 INVERTER SPECIFICATION

### 6.1 TYPE OF INVERTER CONNECTOR

Input connector: LVC-D20SFYG (HONDA)

Output connector: JST SM02B-BHSS-1-TB (JST)

### 6.2 BUILT-IN INVERTER INPUT PIN ASSIGNMENT

| Input connector |             | Comments                                                                                                                            |
|-----------------|-------------|-------------------------------------------------------------------------------------------------------------------------------------|
| HONDA           | LVC-D20SFYG |                                                                                                                                     |
| Pin             | Function    |                                                                                                                                     |
| 1               | INV_SRC     | This power rail should be used as a power rail to drive the backlight DC-AC converter                                               |
| 2               | INV_SRC     | This power rail should be used as a power rail to drive the backlight DC-AC converter                                               |
| 3               | INV_SRC     | This power rail should be used as a power rail to drive the backlight DC-AC converter                                               |
| 4               | INV_SRC     | This power rail should be used as a power rail to drive the backlight DC-AC converter                                               |
| 5               | GND         | Ground                                                                                                                              |
| 6               | NC          | No Connection                                                                                                                       |
| 7               | 5VALW       | This should be used as power source that stores the brightness/contrast values & the circuit that interfaces with SMB_CLK & SMB_DAT |
| 8               | GND         | Ground                                                                                                                              |
| 9               | SMB_DAT     | SMBus interface for sending brightness & contrast information to the inverter/panel                                                 |
| 10              | SMB_CLK     | SMBus interface for sending brightness & contrast information to the inverter/panel                                                 |
| 11              | GND         | Ground                                                                                                                              |
| 12              | FPBACK      | Control signal input into the inverter to turn the backlight ON & OFF (1 - ON, 0 - OFF)                                             |
| 13              | GND         | Ground                                                                                                                              |
| 14              | LAMP_STAT   | Lamp status (Feedback, Lamp On = 5v, Lamp Off 0v), from control chip                                                                |
| 15 ~ 20         | NC          | No Connection                                                                                                                       |

### 6.3 BUILT-IN INVERTER OUTPUT PIN ASSIGNMENT

| Output connector |                 | Comments                        |
|------------------|-----------------|---------------------------------|
| JST              | SM02B-BHSS-1-TB |                                 |
| Pin              | Function        |                                 |
| 1                | CFL-High        | High-voltage output to the CCFL |
| 2                | CFL-Low         | Low-voltage output to the CCFL  |

## 6.4 GENERAL ELECTRICAL SPECIFICATION

### 6.4.1 Absolute Maximum Ratings

| Items                     | Absolute max. ratings | Note |
|---------------------------|-----------------------|------|
| INV_SRC(V)                | -1.0~23.5             |      |
| FPBACK/SMB_CLK/SMB_DAT(V) | -1.0~5.5              |      |

### 6.4.2 Electrical Characteristics

| No. | Item                                     | Symbol         | Condition                                                 | Min. | Typ. | Max. | Unit  |
|-----|------------------------------------------|----------------|-----------------------------------------------------------|------|------|------|-------|
| 1   | Input Voltage                            | INV_SRC        |                                                           | 7.5  | 14.4 | 21   | V     |
| 2   | Input Signal Level for 5VSUS             | 5VSUS          |                                                           | 4.85 | 5    | 5.2  | V     |
| 3   | Input Signal Level for 5VALW             | 5VALW          |                                                           | 4.85 | 5    | 5.2  | V     |
| 4   | Input Power                              | Pin(Max)       | Vin=7.5V~21V<br>SMB_DAT=00H                               |      |      | 5    | W     |
| 5   | Backlight                                | FPBACK=ON      | Enable the inverter                                       | 2.0  | -    | 5.25 | V     |
|     | ON/OFF Control                           | FPBACK=OFF     | Disable the inverter                                      | -0.3 | -    | 0.8  | V     |
| 6   | Brightness Adjust (Lamp Current Control) | SMB_DAT        | Control by SMBus(256 steps dimming control)               | FFH  | -    | 00H  | -     |
| 7   | Output Voltage                           | Vout           | IL = 6.0mA(typ)                                           | 603  | 670  | 737  | Vrms  |
| 8   | Output Current                           | Iout (Min)     | Vin=7.5V~21V<br>SMB_DAT=FFH Ta=25℃, after running 30 min. | 1.7  | 2.0  | 2.3  | mAmps |
|     |                                          | Iout (Max)     | Vin=7.5V~21V<br>SMB_DAT=00H Ta=25℃, after running 30 min. | 5.7  | 6.0  | 6.3  | mAmps |
| 9   | Operation Frequency                      | Freq           | Vin=7.5V~21V                                              | 45   | -    | 65   | KHz   |
| 10  | Burst mode frequency                     | f <sub>B</sub> | Vin=7.5V~21V                                              | 200  | -    | 220  | Hz    |
| 11  | Open Lamp Voltage                        | Vopen          | No Load                                                   | 1500 |      | 1800 | Vrms  |
| 12  | Striking Time                            | Ts             | No Load                                                   | 0.6  | 1    | 1.4  | Sec   |

|    |                                        |        |                                              |    |     |     |     |
|----|----------------------------------------|--------|----------------------------------------------|----|-----|-----|-----|
| 13 | Efficiency                             | $\eta$ | Vin=7.5V, SMB_DAT=00H<br>(RES LOAD=100K ohm) | 80 | -   | -   | %   |
| 14 | Start and Delay Time                   |        | Vin=14.4V,<br>SMB_DAT=FFH                    | -  | 130 | 200 | uS  |
| 15 | Start -up time<br>(Turn on delay time) |        | Vin=14.4V,<br>SMB_DAT=00H                    | -  | -   | 0.1 | Sec |

- Input Voltage

The operating input voltage of inverter shall be defined.

The inverter shall ignite the CCFL lamp at minimum input voltage at any environment conditions.

- On/Off control

Enable: At “**ON**” condition (FPBACK=Hi), enable the inverter.

Disable: At “**OFF**” condition (FPBACK=Lo), disable the inverter.

- Quiescent current

At the inverter “**OFF**” condition, input quiescent should be less than 0.1mA.

- Open lamp voltage

The inverter start-up output voltage will be above “**Vopen**” for “**Ts**” minimum at any condition under specify until lamp to be ignited. The inverter should be shutdown if lamp ignition was failed in “**Ts**” maximum. The inverter shall be capable of withstanding the output connections open without component over-stress / fire / smoke /arc.

- Burst mode frequency

The burst mode frequency should be in specification in any environment condition and electrical condition.

- Brightness control

SM-BUS values for panel luminance are to be included in the on LCD board EEDID ROM chip table. The supplier will measure panel luminance in a system and define the SMBUS values for each of the 8 required luminance levels. The panel luminance, for which SMBUS values will be provided in the EEDID from byte # 113(hex #71), to byte # 120, (hex # 78), is show in the table below. The inverter supplier should provide these appropriate values to CMO.

| Step Count        | Step 1   | Step 2   | Step3    | Step 4   | Step 5   | Step 6   | Step 7   | Step 8   |
|-------------------|----------|----------|----------|----------|----------|----------|----------|----------|
| Address           | Byte 113 | Byte 114 | Byte 115 | Byte 116 | Byte 117 | Byte 118 | Byte 119 | Byte 120 |
| SM-Bus Data Value | FF       | F1       | E3       | DA       | B7       | 8E       | 70       | 54       |
| Luminance (nits)  | 10       | 17       | 24       | 30       | 60       | 110      | 150      | Max      |

- Output ripple ratio

$$\text{Ripple ratio} = 2 * (\text{Ipeak} - \text{Ivalley}) / (\text{Ipeak} + \text{Ivalley}) * 100\%$$

The Ripple ratio should be less than 5% and ripple frequency should be less than 200 Hz.



- Power up Overshoot & Undershoot

Overshoot & Undershoot at power up should not exceed the following limits.

| Vin         | Output current<br>Io(rms) | Io (dI)<br>Overshoot/Undershoot | Settling time<br>(dT) |
|-------------|---------------------------|---------------------------------|-----------------------|
| 0→Vin(min.) | Io(max.)                  | 150% / 50%                      | 5 ms max.             |
|             | Io(min.)                  |                                 |                       |
| 0→Vin(typ.) | Io(max.)                  | 150% / 50%                      | 5 ms max.             |
|             | Io(min.)                  |                                 |                       |
| 0→Vin(max.) | Io(max.)                  | 150% / 50%                      | 5 ms max.             |
|             | Io(min.)                  |                                 |                       |

$$dI = I_{\max} - I_o \quad \text{or} \quad dI = (I_o - I_{\min}) / I_o$$

- Output connections short protection

The inverter shall be capable of withstanding the output connections short without damage or over-stress.

And the inverter maximum input power shall be limited within 1W.

### 6.4.3 Mechanical Drawing

### 6.4.4 Other Information

- Safety

- The inverter shall meet the requirement of "Limited current circuits" in paragraphs 2.4.1 in IEC60950. There is no fire/smoke while simulating the component of the inverter open/short test.

- The Inverter AND panel must be UL certified with CB certificate and LCC (Limited Current Circuit) test and test reports from UL. Inverter panel combo must pass Dell Safety requirements.

- EMI

The inverter must meet the radiated limitation requirement of CISPR22 class B, FCC-B and VCCI level II with 6dB margin minimum while the inverter operating in the complete system.

- Environment Regulation

- Follow the RoHS requirement.

- Fill in CMO's official document <<Environmentally Conscious Products Questionnaire for Suppliers of Materials, Parts, and Products>> and turn in to CMO before CMO's specification approval process.

- Dell's other requirements

1. The inverter must not emit any audible noise.

2. Please refer to CMO's official document. "General Inverter Specification for LCD Module" for other general information such as reliability test, safety and etc..

3. Please also refer to DELL's official document about inverter:

- LCD Backlight Design Spec X00-04

- DELL's LCD Inverter Qualification Plan, Rev. A00

**CHI MEI**  
OPTOELECTRONICS CORP

Issued Date: Jan 17, 2006

Model No.: N141I1 - L01

**Approval**

- Prohibited Components
- “Holy Stone(禾申堂)”’s products are prohibited.

**Confidential Notice**

Remind that all the information described in this document is confidential. Please don't reveal to other people else before getting CMO's agreement.


## 7 INTERFACE TIMING

### 7.1 INPUT SIGNAL TIMING SPECIFICATIONS


The specifications of input signal timing are as the following table and timing diagram.

| Signal | Item                       | Symbol | Min. | Typ. | Max. | Unit | Note |
|--------|----------------------------|--------|------|------|------|------|------|
| DCLK   | Frequency                  | 1/Tc   | 50   | 71.1 | 80   | MHz  | -    |
| DE     | Vertical Total Time        | TV     | 810  | 823  | 1900 | TH   | -    |
|        | Vertical Addressing Time   | TVD    | 800  | 800  | 800  | TH   | -    |
|        | Horizontal Total Time      | TH     | 1360 | 1440 | 1900 | Tc   | -    |
|        | Horizontal Addressing Time | THD    | 1280 | 1280 | 1280 | Tc   | -    |

**INPUT SIGNAL TIMING DIAGRAM**

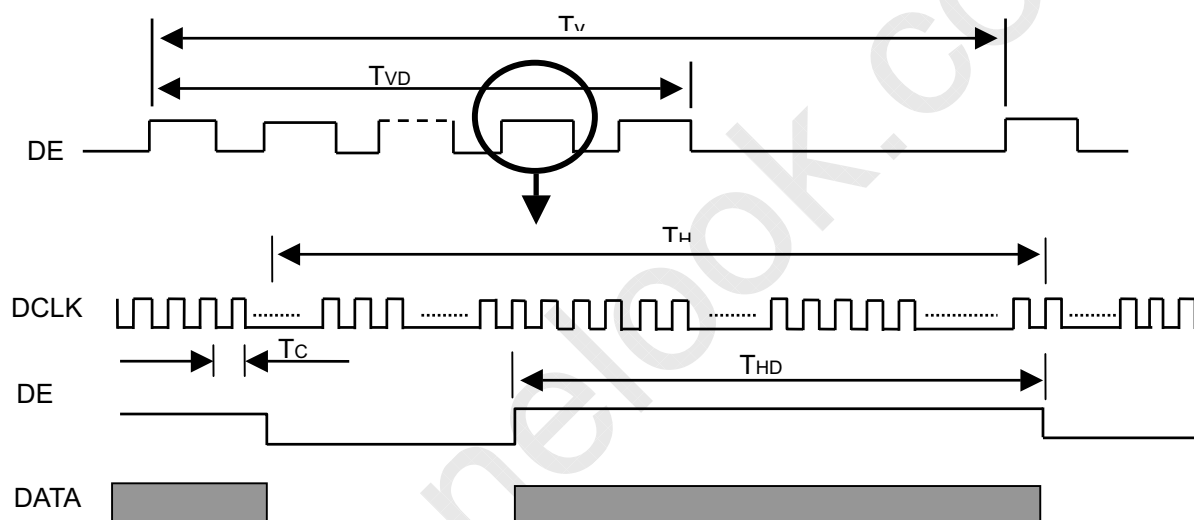

### 7.2 POWER ON/OFF SEQUENCE

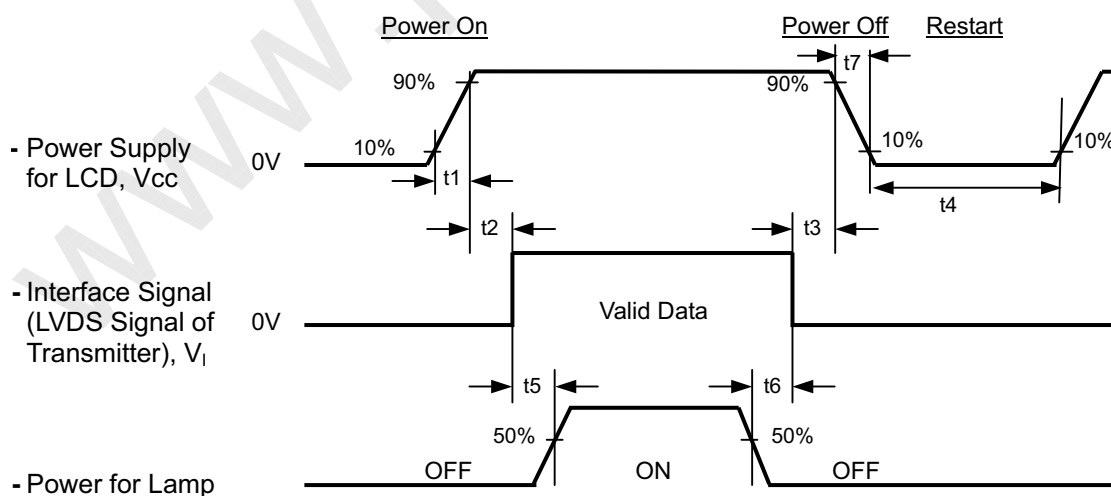





## Timing Specifications:

$$0.5 < t_1 \leq 10 \text{ msec}$$

$$0 < t_2 \leq 50 \text{ msec}$$

$$0 < t_3 \leq 50 \text{ msec}$$

$$t_4 \geq 500 \text{ msec}$$

$$t_5 \geq 200 \text{ msec}$$

$$t_6 \geq 200 \text{ msec}$$

Note (1) Please avoid floating state of interface signal at invalid period.

Note (2) When the interface signal is invalid, be sure to pull down the power supply of LCD Vcc to 0 V.

Note (3) The Backlight inverter power must be turned on after the power supply for the logic and the interface signal is valid. The Backlight inverter power must be turned off before the power supply for the logic and the interface signal is invalid.

Note (4) Sometimes some slight noise shows when LCD is turned off (even backlight is already off). To avoid this phenomenon, we suggest that the Vcc falling time had better to follow

$$t_7 \geq 5 \text{ msec}$$

## 8 OPTICAL CHARACTERISTICS

### 8.1 TEST CONDITIONS


| Item                       | Symbol                                                        | Value | Unit |
|----------------------------|---------------------------------------------------------------|-------|------|
| Ambient Temperature        | Ta                                                            | 25±2  | °C   |
| Ambient Humidity           | Ha                                                            | 50±10 | %RH  |
| Supply Voltage             | V <sub>CC</sub>                                               | 3.3   | V    |
| Input Signal               | According to typical value in "3. ELECTRICAL CHARACTERISTICS" |       |      |
| Inverter Current           | I <sub>L</sub>                                                | 6     | mA   |
| Inverter Driving Frequency | F <sub>L</sub>                                                | 61    | KHz  |
| Inverter                   | Sumida H05-4915                                               |       |      |

The relative measurement methods of optical characteristics are shown in 8.2. The following items should be measured under the test conditions described in 8.1 and stable environment shown in Note (6).

### 8.2 OPTICAL SPECIFICATIONS

| Item                       |               | Symbol            | Condition                                                    | Min.         | Typ.                                                                 | Max.         | Unit              | Note     |    |    |   |      |
|----------------------------|---------------|-------------------|--------------------------------------------------------------|--------------|----------------------------------------------------------------------|--------------|-------------------|----------|----|----|---|------|
| Contrast Ratio             |               | CR                | $\theta_x=0^\circ, \theta_Y=0^\circ$<br>Viewing Normal Angle | 400          | 600                                                                  | -            | -                 | (2), (5) |    |    |   |      |
| Response Time              |               | T <sub>R</sub>    |                                                              | -            | 5                                                                    | 10           | ms                | (3)      |    |    |   |      |
|                            |               | T <sub>F</sub>    |                                                              | -            | 11                                                                   | 16           | ms                |          |    |    |   |      |
| Average Luminance of White |               | L <sub>5p</sub>   |                                                              | 190          | 240                                                                  | -            | cd/m <sup>2</sup> | (4), (5) |    |    |   |      |
| Luminance Non-Uniformity   |               | δW <sub>5p</sub>  |                                                              | -            | -                                                                    | 20           | %                 | (5), (6) |    |    |   |      |
|                            |               | δW <sub>13p</sub> |                                                              | -            | -                                                                    | 35           | %                 |          |    |    |   |      |
| Color Gamut                |               | C.G               |                                                              | 42           | 45                                                                   | -            | %                 | (5), (7) |    |    |   |      |
| Color Chromaticity         | Red           | R <sub>x</sub>    |                                                              | TYP<br>-0.02 | 0.590<br>0.340<br>0.319<br>0.541<br>0.152<br>0.125<br>0.313<br>0.329 | TYP<br>+0.02 | -                 | (1), (5) |    |    |   |      |
|                            |               | R <sub>y</sub>    |                                                              |              |                                                                      |              | -                 |          |    |    |   |      |
|                            | Green         | G <sub>x</sub>    |                                                              |              |                                                                      |              | -                 |          |    |    |   |      |
|                            |               | G <sub>y</sub>    | -                                                            |              |                                                                      |              |                   |          |    |    |   |      |
|                            | Blue          | B <sub>x</sub>    | -                                                            |              |                                                                      |              |                   |          |    |    |   |      |
|                            |               | B <sub>y</sub>    | -                                                            |              |                                                                      |              |                   |          |    |    |   |      |
|                            | White         | W <sub>x</sub>    | -                                                            |              |                                                                      |              |                   |          |    |    |   |      |
|                            |               | W <sub>y</sub>    | -                                                            |              |                                                                      |              |                   |          |    |    |   |      |
|                            | Viewing Angle | Horizontal        | θ <sub>x</sub> +                                             |              |                                                                      |              | CR≥10             |          | 40 | 45 | - | Deg. |
|                            |               |                   | θ <sub>x</sub> -                                             |              |                                                                      |              |                   |          | 40 | 45 | - |      |
| Vertical                   |               | θ <sub>Y</sub> +  | 15                                                           | 20           | -                                                                    |              |                   |          |    |    |   |      |
|                            |               | θ <sub>Y</sub> -  | 40                                                           | 45           | -                                                                    |              |                   |          |    |    |   |      |

Note (1) Definition of Viewing Angle ( $\theta_x$ ,  $\theta_y$ ):

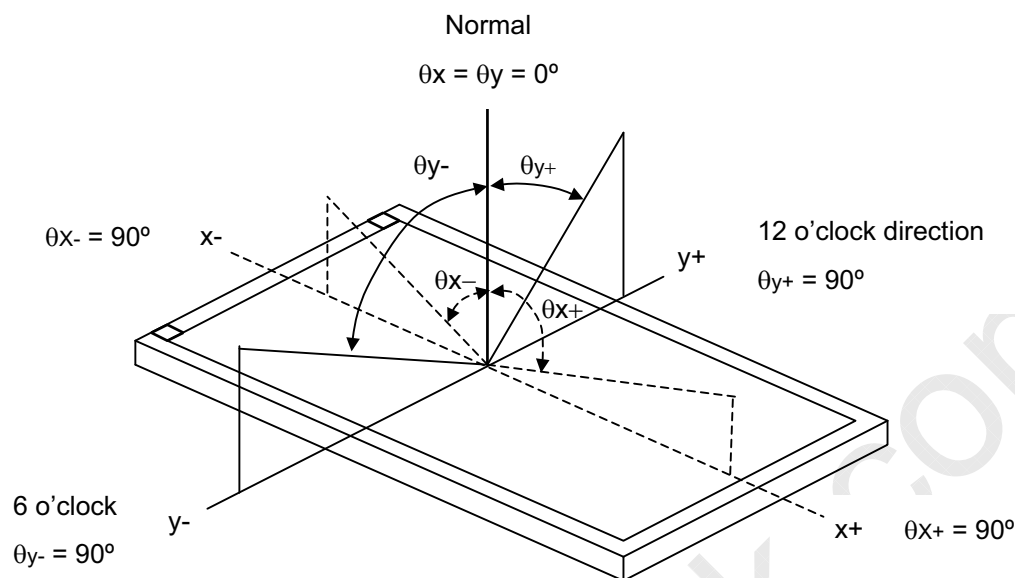

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{63} / L_0$$


$L_{63}$ : Luminance of gray level 63

$L_0$ : Luminance of gray level 0

$$\text{CR} = \text{CR} (5)$$

CR (X) is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time ( $T_R$ ,  $T_F$ ):

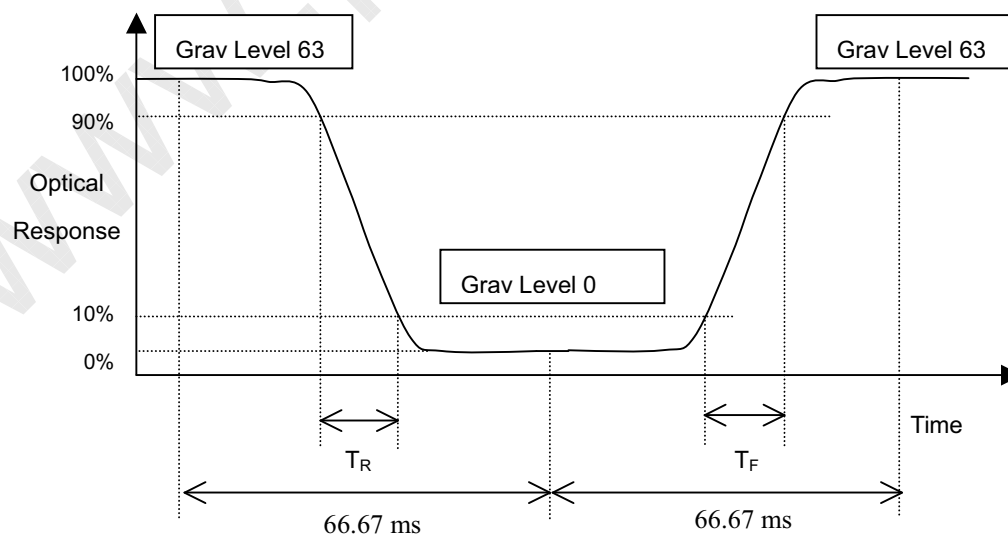

Note (4) Definition of Average Luminance of White ( $L_{5p}$ ):


Measure the luminance of gray level 63 at 5 points

$$L_{5p} = [L(5) + L(10) + L(11) + L(12) + L(13)] / 5$$

$L(x)$  is corresponding to the luminance of the point X at Figure in Note (6)

Note (5) Measurement Setup:

The LCD module should be stabilized at given temperature for 20 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 20 minutes in a windless room.

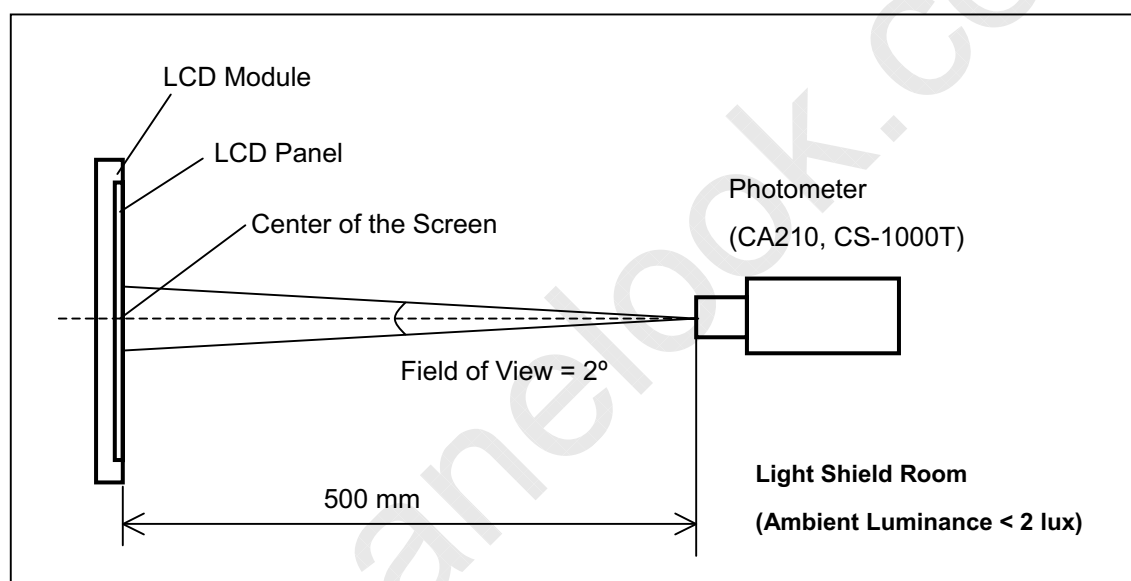



**CHI MEI**  
OPTOELECTRONICS CORP.

Issued Date: Jan 17, 2006

Model No.: N141I1 - L01


**Approval**

Note (6) Definition of White Variation ( $\delta W_{5p}$ ,  $\delta W_{13p}$ ):

Measure the luminance of gray level 63 at 5, 13 points

$$\delta W_{5p} = \{1 - \{ \text{Minimum} [L(5) + L(10) + L(11) + L(12) + L(13)] / \text{Maximum} [L(5) + L(10) + L(11) + L(12) + L(13)] \} \} * 100\%$$

$$\delta W_{13p} = \{1 - \{ \text{Minimum} [L(1) \sim L(13)] / \text{Maximum} [L(1) \sim L(13)] \} \} * 100\%$$

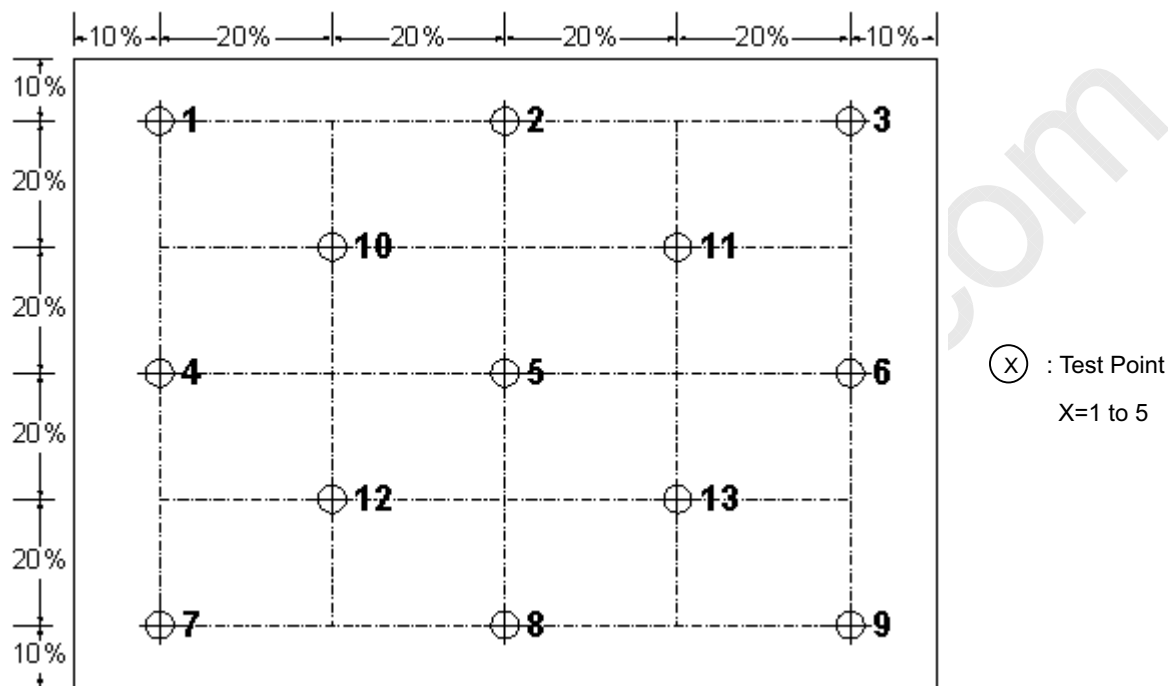

Note (7) Definition of color gamut (C.G):


$$C.G = \Delta R G B / \Delta R_0 G_0 B_0 * 100\%$$

$R_0, G_0, B_0$ : color coordinates of red, green, and blue defined by NTSC, respectively.

$R, G, B$ : color coordinates of module on 63 gray levels of red, green, and blue, respectively.

$\Delta R_0 G_0 B_0$ : area of triangle defined by  $R_0, G_0, B_0$

$\Delta R G B$ : area of triangle defined by  $R, G, B$

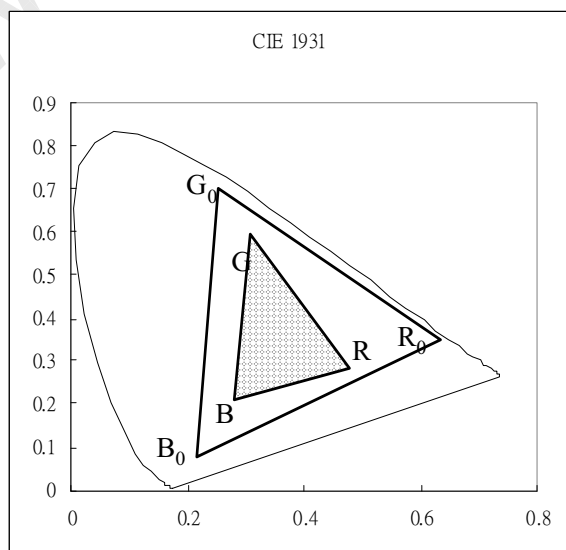

## 9 PRECAUTIONS

### 9.1 ASSEMBLY AND HANDLING PRECAUTIONS

- (1) The module should be assembled into the system firmly by using every mounting hole. Be careful not to twist or bend the module.
- (2) While assembling or installing modules, it can only be in the clean area. The dust and oil may cause electrical short or damage the polarizer.
- (3) Use fingerstalls or soft gloves in order to keep display clean during the incoming inspection and assembly process.
- (4) Do not press or scratch the surface harder than a HB pencil lead on the panel because the polarizer is very soft and easily scratched.
- (5) If the surface of the polarizer is dirty, please clean it by some absorbent cotton or soft cloth. Do not use Ketone type materials (ex. Acetone), Ethyl alcohol, Toluene, Ethyl acid or Methyl chloride. It might permanently damage the polarizer due to chemical reaction.
- (6) Wipe off water droplets or oil immediately. Staining and discoloration may occur if they left on panel for a long time.
- (7) If the liquid crystal material leaks from the panel, it should be kept away from the eyes or mouth. In case of contacting with hands, legs or clothes, it must be washed away thoroughly with soap.
- (8) Protect the module from static electricity, it may cause damage to the C-MOS Gate Array IC.
- (9) Do not disassemble the module.
- (10) Do not pull or fold the lamp wire.
- (11) Pins of I/F connector should not be touched directly with bare hands.

### 9.2 SAFETY PRECAUTIONS


- (1) High temperature or humidity may reduce the performance of module. Please store LCD module within the specified storage conditions.
- (2) It is dangerous that moisture come into or contacted the LCD module, because the moisture may damage LCD module when it is operating.
- (3) It may reduce the display quality if the ambient temperature is lower than 10 °C. For example, the response time will become slowly, and the starting voltage of lamp will be higher than the room temperature.

### 9.3 OPERATION PRECAUTIONS

- (1) Do not pull the I/F connector in or out while the module is operating.
- (2) Always follow the correct power on/off sequence when LCD module is connecting and operating. This can prevent the CMOS LSI chips from damage during latch-up.
- (3) The startup voltage of Backlight is approximately 1000 Volts. It may cause electrical shock while assembling with inverter. Do not disassemble the module or insert anything into the Backlight unit.


## 10 PACKAGING

### 10.1 CARTON

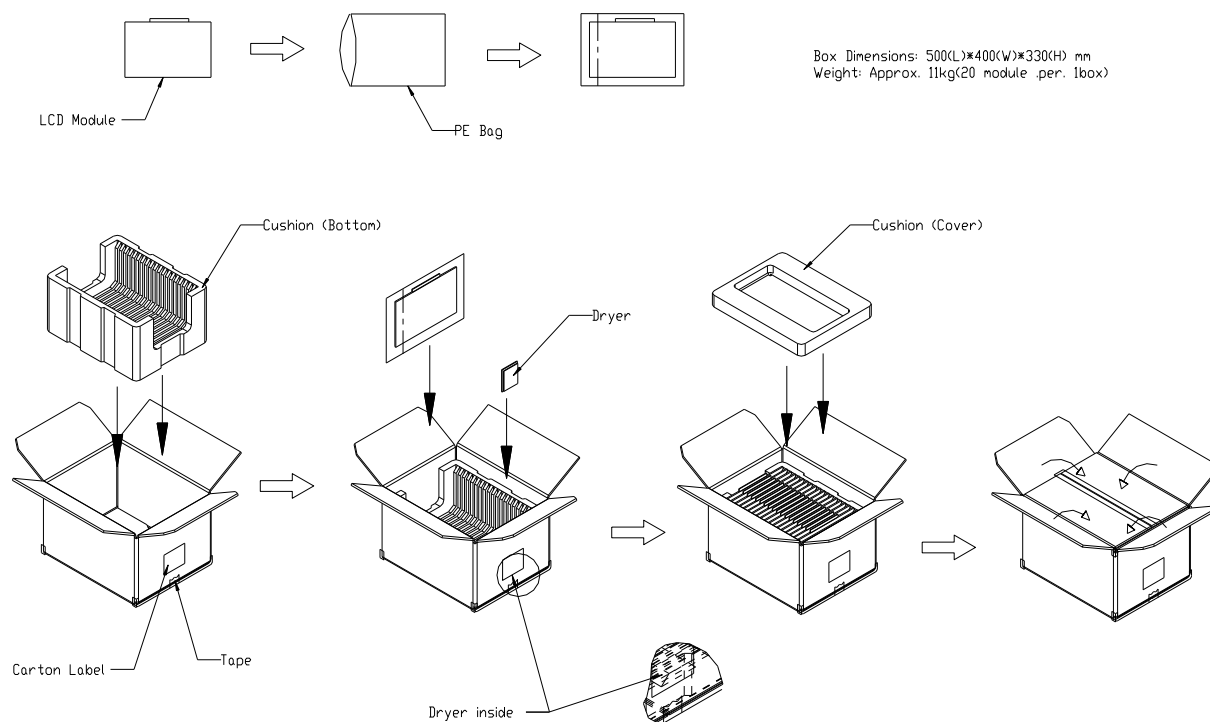

**Figure. 10-1 Packing method**

## 10.2 PALLET

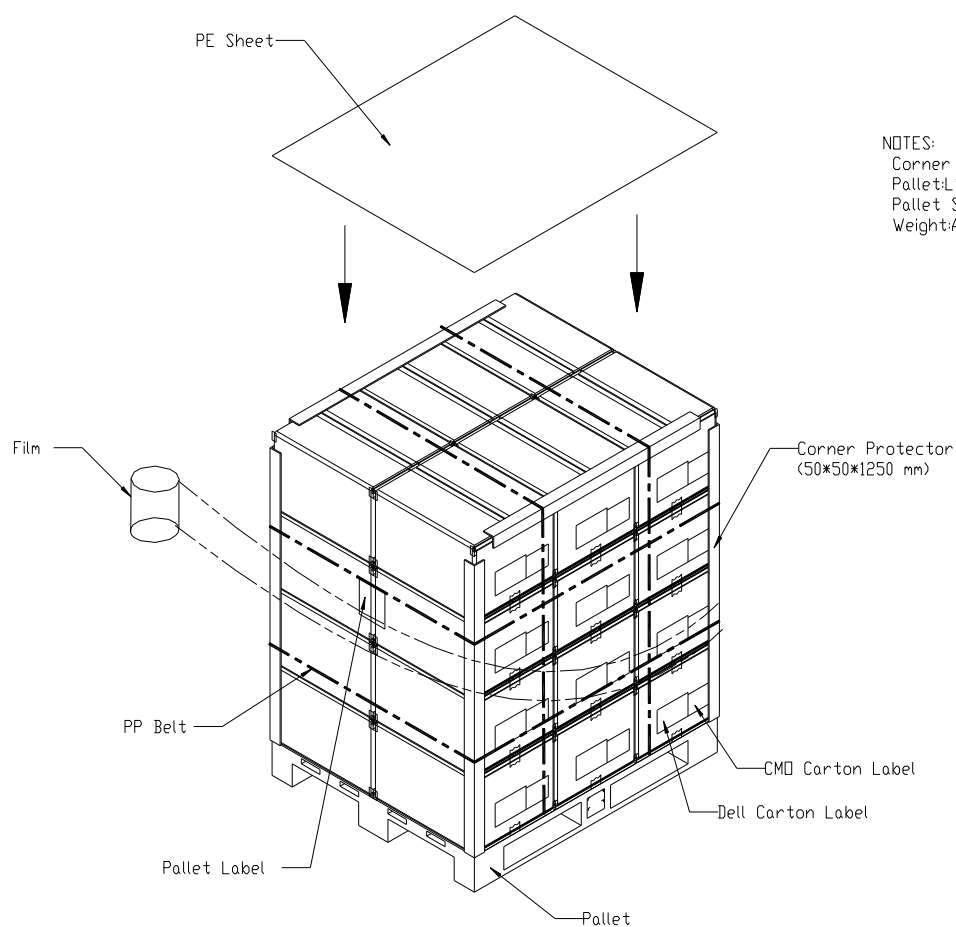**NOTES:**

Corner Protector: L1250mm\*W50mm\*H50mm

Pallet: L1200\*W1000\*H135mm

Pallet Stock Dim: L1200\*W1000\*H1465mm

Weight: Approx. 284kg

**Figure. 10-2 Packing method**



## 11 DEFINITION OF LABELS

### 11.1 CMO MODULE LABEL


The barcode nameplate is pasted on each module as illustration, and its definitions are as following explanation.



(a) Model Name: N141I1 - L01

(b) Revision: Rev. XX, for example: A1, ..., C1, C2 ...etc.

(c) Serial ID: XX XX XX Y M D X N N N N

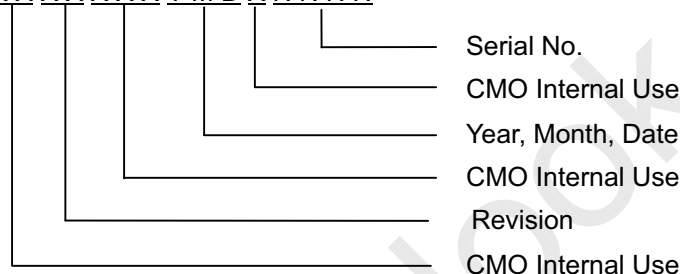

(d) Production Location: MADE IN XXXX. XXXX stands for production location.

Serial ID includes the information as below:

(a) Manufactured Date: Year: 1~9, for 2001~2009


Month: 1~9, A~C, for Jan. ~ Dec.

Day: 1~9, A~Y, for 1<sup>st</sup> to 31<sup>st</sup>, exclude I, O and U

(b) Revision Code: cover all the change

(c) Serial No.: Manufacturing sequence of product

### 11.2 CMO CARTON LABEL

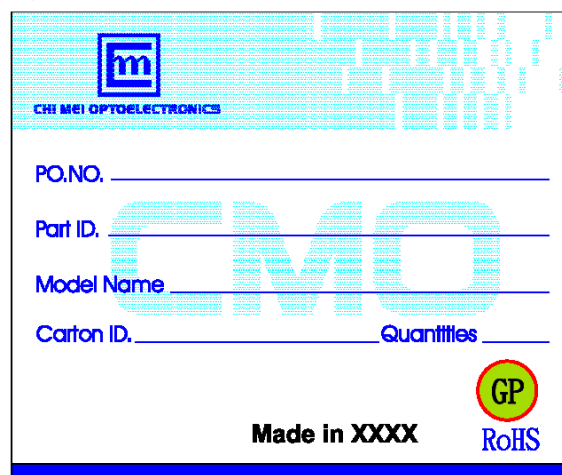

(a) Production location: Made In XXXX. XXXX stands for production location.



### 11.3 CARTON LABEL

|                                                                                                                                                                                               |                                                                                                                      |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------|
| PKG ID (3S)124161241729112345609886C20<br>                                                                   | <br>REV.A06                         |
| DP/N 03J849                                                                                                  | <br>Vendor ID Loc Id<br>12416 12416 |
| BOX Qty 20  Made in Taiwan  | <br>Mfg Id<br>70896                 |

#### Type J Label



- Verdana font or equivalent,bold
- 20pt.-all fields
- 203 DPI printer minimum
- Code 128B
- 10-15 mil minimum narrow bar
- .75"minimum barcode height
- .10" or greater quiet zone
- 4.0" x 6.0" label size
- Brady THT -25-402-1 or equivalent
- Brady R6107 series ribbon or equivalent

### 11.4 PALLET LABEL




|                                                                                                                               |                  |                                                                                     |                          |
|-------------------------------------------------------------------------------------------------------------------------------|------------------|-------------------------------------------------------------------------------------|--------------------------|
| FROM :CMO Corporation<br>Tainan,<br>Taiwan 744 R.O.C                                                                          |                  | TO:DELL COMPUTER<br>2128 West Braker<br>Austin TX                                   |                          |
| P.O.NUMBER<br>12345678                                                                                                        |                  |  |                          |
|                                            |                  | DELL P/N<br>12345                                                                   |                          |
| COUNTRY OF ORIGIN<br>TW                                                                                                       |                  |  |                          |
|                                            |                  | PACKING LIST#<br>1234567890123                                                      |                          |
| PACKING LIST QTY<br>654321                                                                                                    |                  |  |                          |
|                                            |                  | DESTINATION MAS LOC<br>60                                                           |                          |
| DESTINATION LOCATION<br>B4                                                                                                    |                  |  |                          |
| AIRBILL NUMBER<br>12345678901234567890<br> |                  |                                                                                     |                          |
| PKG CNT<br>999 OF 999                                                                                                         | BOX CNT<br>12345 | REVISION<br>A00-00                                                                  | SHIP DATE<br>Apr 29,2003 |
| PART DESCRIPTION XXXXXXXXXXXXXXXXXXXXXXXX<br>12345678901234567890123456789012345678901                                        |                  |                                                                                     |                          |

#### Type K Label

- Verdana font or equivalent,bold
- 12pt.-all descript fields
- 10pt.-all data fields
- 203 DPI printer minimum
- Code 128B
- 10 mil minimum narrow bar
- .30-.50"minimum barcode height
- .10" or greater quiet zone
- 4.0" x 6.5" label size
- Brady THT -78-402-.9 or equivalent
- Brady R6107 series ribbon or equivalent

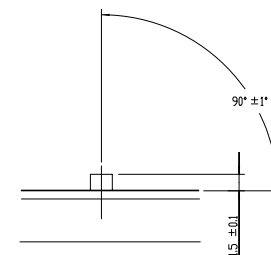

DETAIL A  
SCALE 4:1  
(2 Places)

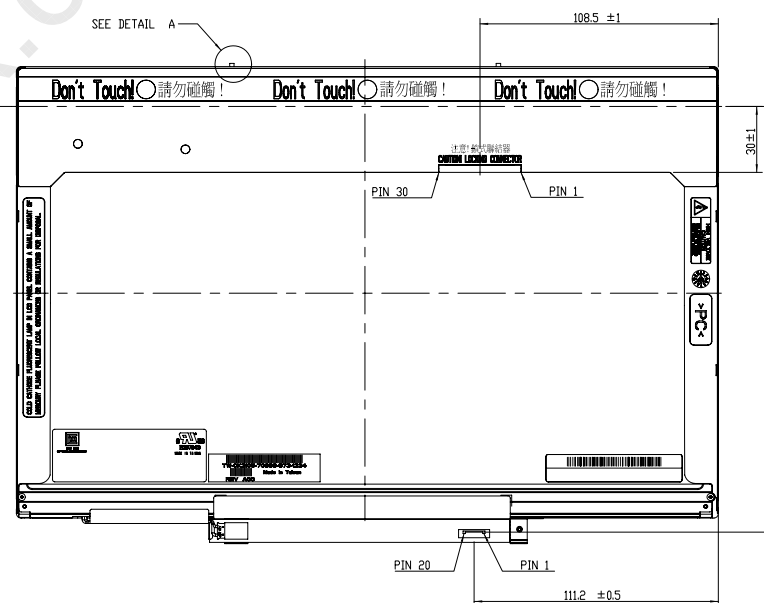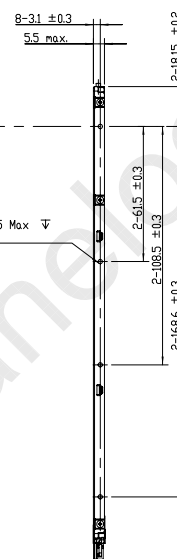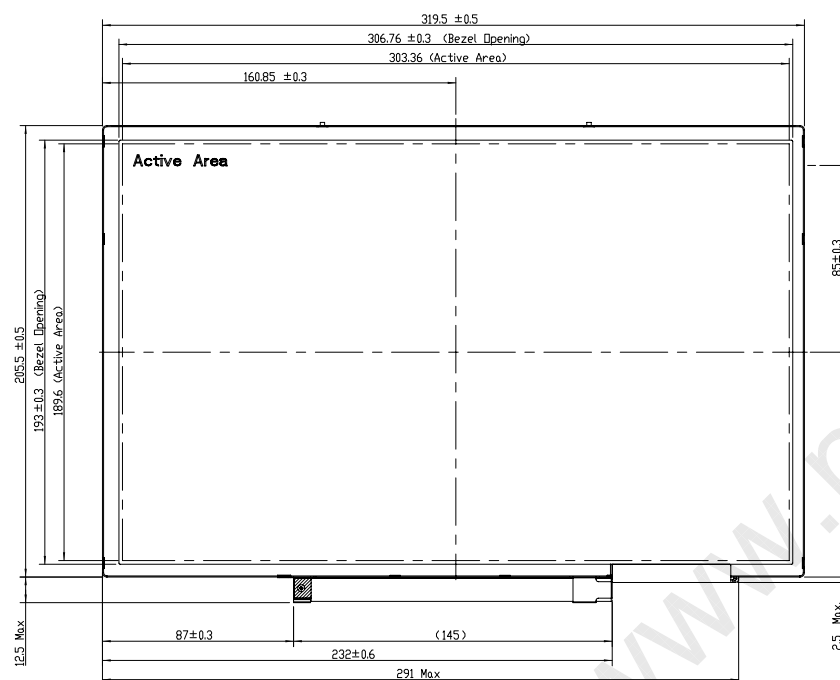

#### NOTES:

1. OUTLINE TOLERANCE: ±0.5mm.
2. MAX.SCREW LENGTH: 2.5 mm.
3. MAX.SCREW TORQUE: 2.0 kg-cm.
4. BACKLIGHT LAMP CONNECTOR: BHSR-02VS-1 (JST).
5. LCD MODULE INPUT CONNECTOR: FI-XB30SRL-HF11 (JAE).

|                               |                       |                                         |    |
|-------------------------------|-----------------------|-----------------------------------------|----|
| TITLE Outline N4101-L01       |                       | 2D REV. A                               |    |
| Approved Yule Lin             |                       | 3D REV. 1.0                             |    |
| Checked Yule Lin              | Drawing No. N41E4101A | Part No. NA                             |    |
| Designer Shunnan              | Material NA           | Sheet 1 / 1                             | AI |
| Date 10-Jan-2006              | Scale 1:1             | Unit mm                                 |    |
| CHI MEI OPTOELECTRONICS CORP. |                       | ALL RIGHTS RESERVED. COPYING FORBIDDEN. |    |

| Mark | Description | Date | Changed_By | Approved_By | ECN No. | Remark |
|------|-------------|------|------------|-------------|---------|--------|
| 1    |             |      |            |             |         |        |
| 2    |             |      |            |             |         |        |
| 3    |             |      |            |             |         |        |
| 4    |             |      |            |             |         |        |