

60W Open Frame Single Output NAD-600X series



Feature:

- 90 to 264Vac universal input range.
- UL/CUL, TUV, CB safety meet(approval).
- EMI/RFI meet VDE & FCC limit B.
- Low cost & compact size.
- 60Watts in 127×76.2×44.1mm Size.
- 2 Year Warranty.

Specifications: typical at nominal line, full load at 25 ° C.

| Input Specifications: | General Specifications: |
|--|--|
| Input voltage: 90 to 264Vac | Efficiency: 75% typical at full load |
| Input Frequency: 47 Hz to 63Hz | Hold-up time: 15ms @ 115Vac full load |
| Input inrush current: 20A at 115Vac 40A at 230Vac | EMI/RFI: VDE & FCC Class B limits |
| Earth leakage: 0.2mA max @ 115Vac 0.4mA max @ 230Vac | Dielectric Withstand: Input/output: 3000Vac Input/Ground: 1500Vac |
| Output Specifications: | *Safety Meet(Approval): UL/CUL UL60950 TUV EN60950 CB IEC950 |
| Output Rating: See Selection table | |
| Output Voltage Accuracy : ± 5% max. | |
| Line Regulation: ± 1% max. | Switching frequency: 20kHz(reference) |
| Load Regulation: ± 1% max. (Full to half load) | Weight: 350g |
| Transient Response ± 1% max.dev. (Full to half load) 500uS recovery | MTBF: 100,000hours(MIL-HDBK-217F) |
| Temperature Coefficient: ± 0.04% / °C | Environmental Specifications: |
| Ripple & Noise: 1% P-P max. | Operating temperature: 0 to +50°C |
| Protections: b. Over voltage protection c. Over power protection d. Short circuit protection | Storage temperature: -20 to +85°C |
| | Humidity: 5 to 95 % RH non-condensing |
| | Vibration: 2.4G , 5 to 500Hz |
| | Cooling: Free air convection |

Note:

1. Vibration test: Three orthogonal axes, random vibration, 10 minutes for each axis.
2. Maximum output power is 60W.
3. At least 20% of load is required to obtain stable regulation.
4. Ripple & noise test method is measured at output terminal across a 0.1uF ceramic cap & a 10uF tantalum or electrolytic cap in parallel with a 20MHz bandwidth oscilloscope directly.

* Please refer the safety approval status on appendix 1, For latest safety approval status Please consult YCL or visit" www.ycl.com.tw"

60W Open Frame Single Output NAD-600X series




Model Selection Table:

| Model No. | Output Voltage | Output Current Minimum | Output Current Maximum | Max. Power |
|-----------|----------------|------------------------|------------------------|------------|
| NAD-6001 | 5V | 0mA | 12A | 60W |
| NAD-6002 | 12V | 0mA | 5A | 60W |
| NAD-6005 | 3.3V | 0mA | 18A | 60W |

Note:

1. Other output voltage versions available. Please Consult factory for details.

Dimensions: mm \pm 0.5mm

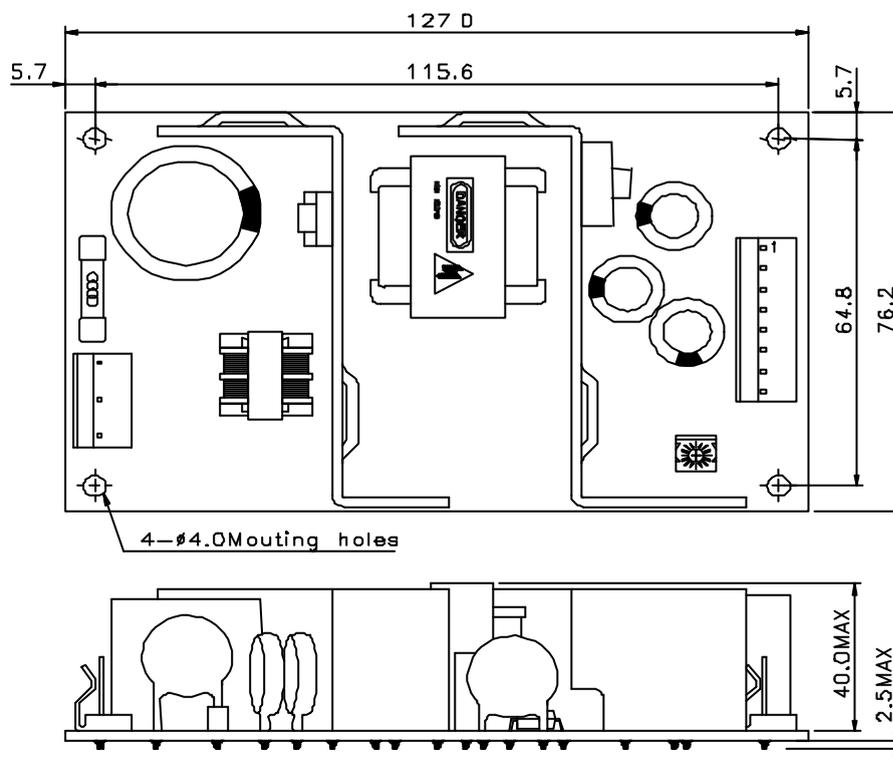

| DC Output Pin Functions | |
|-------------------------|---------|
| Pin 1,2,3,4 | +output |
| Pin 5,6,7,8 | COM |

- DC output mating connector is Molex 09-65-2088, Ever 8673-08 or equivalent.
- AC input mating connector is Molex 5096-03C, Ever 8673-05N2,4 or equivalent.