

TVS Auto Rectifier, 25A

Features

- Low Leakage
- Low Forward Voltage Drop
- Low Cost
- High Surge Current Capability

Mechanical Characteristics


- **Encap:** Epoxy Sealed
- **Lead:** Plated Lead, Solderable
- **Mounting:** Press Fit
- Weight: 6.5 grams (approx.)




PRESS-FIT DIODE

Electrical Characteristics (T _A = 25 ⁰ C unless otherwise specified)						
Parameter		Symbol	NP2520(R)	NP2524(R)	NP2534(R)	Units
Maximum repetitive peak reverse voltage		V _{RRM}	20	24	34	V
Maximum RMS Voltage		V _{RMS}	14	17	24	V
Maximum DC Blocking Voltage		V _{DC}	20	24	34	V
Maximum average forward output current @ T _A = 50 ⁰ C		I _{F(AV)}	25			A
Peak forward surge current (8.3ms) single half sine-wave superimposed on rated load		I _{FSM}	350			A
Maximum instantaneous forward voltage drop @ 100 A		V _F	1.1			V
Maximum DC reverse current at rated DC blocking voltage	T _A = 25 ⁰ C	I _R	1.0			μA
	T _A = 100 ⁰ C		150			
Typical Thermal Resistance		R _{θ(j-c)}	0.8			°C/W
Operating and storage temperature		T _J , T _{STG}	-40 to +175			°C

Package Outline

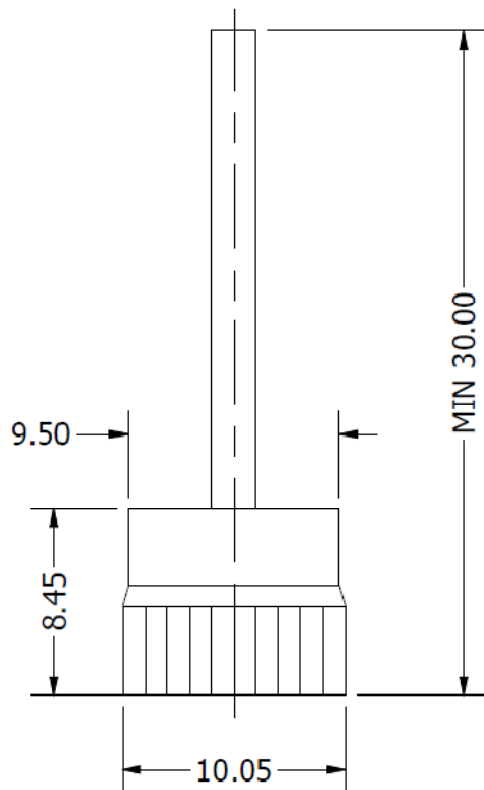

PACKAGE A

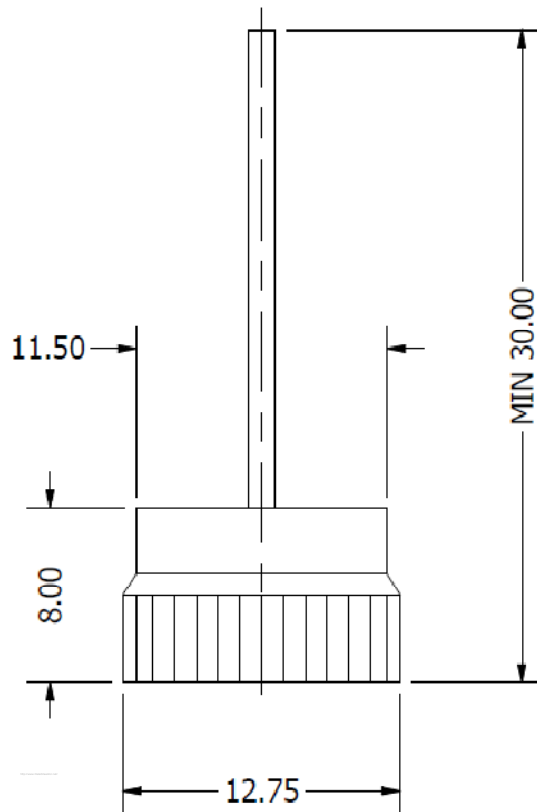

PACKAGE B

ALL DIMENSIONS IN MM

Ordering Table

NP	25	20	R
1	2	3	4

- 1 – Press-fit Diode
- 2 – Current Rating = $I_F (AV)$
- 3 – Voltage, V_{RRM} (as per table)
- 4 – Polarity:
 - > None = Normal (Cathode to Base) (**Red** Color Epoxy)
 - > R = Reverse (Anode to Base) (**Black** Color Epoxy)