

Press Fit Isolated Stud Mount Triac ½", 15 Amps

Features

- Improved glass passivation for high reliability
- Exceptional stability at high temperatures
- Metric thread type available
- Low thermal resistance



SC-66

Electrical Characteristics ($T_A = 25^\circ\text{C}$ unless otherwise specified)

Parameter	Symbol	Part Numbers	Units
Maximum repetitive peak reverse voltage (1), V_{RRM}	200	NPIT152	V
	400	NPIT154	
	600	NPIT156	
RMS on-state current	$I_{T(RMS)}$	15	A
Non-repetitive peak surge on-state current, one cycle	I_{TSM}	150	A
Peak gate trigger current	I_{GTM}	4	A
Peak gate power dissipation @ $I_{GT} \leq I_{GTM}$	P_{GM}	40	W
Average gate power dissipation	$P_{G(AV)}$	0.8	W
Peak off-state current (1)	$I_{DRM} \text{ \& } I_{RRM}$	1.0	mA
Maximum instantaneous forward voltage drop (1)	V_{TM}	2.2	V
DC holding current (1)	I_H	60	mA
Critical rate-of-rise of off-state voltage (1)	Critical dv/dt	100	V/ μsec
Critical rate-of-rise of commutation voltage (1)	Commutating dv/dt	3	V/ μsec
DC gate trigger current	(T_2 + Gate +, T_2 - Gate -) Quads I and III	I_{GT}	100
	(T_2 + Gate -, T_2 - Gate +) Quads II and IV	I_{GT}	150
DC gate trigger voltage	V_{GT}	2.5	V
Gate controlled turn-on time	T_{gt}	3	μsec

Thermal and Mechanical Specifications ($T_A = 25^\circ\text{C}$, unless otherwise noted)


Parameters	Symbol	Values	Units
Maximum operating junction temperature range	T_J	- 40 to +110	$^\circ\text{C}$
Maximum storage temperature range	T_{stg}	- 40 to +150	$^\circ\text{C}$
Maximum thermal resistance, junction to case	$R_{\theta(J-C)}$	2.1	$^\circ\text{C/W}$
Approximate weight	W	30	g

Notes:

(1) All values apply in either direction

Package Outline

(All dimensions in mm)

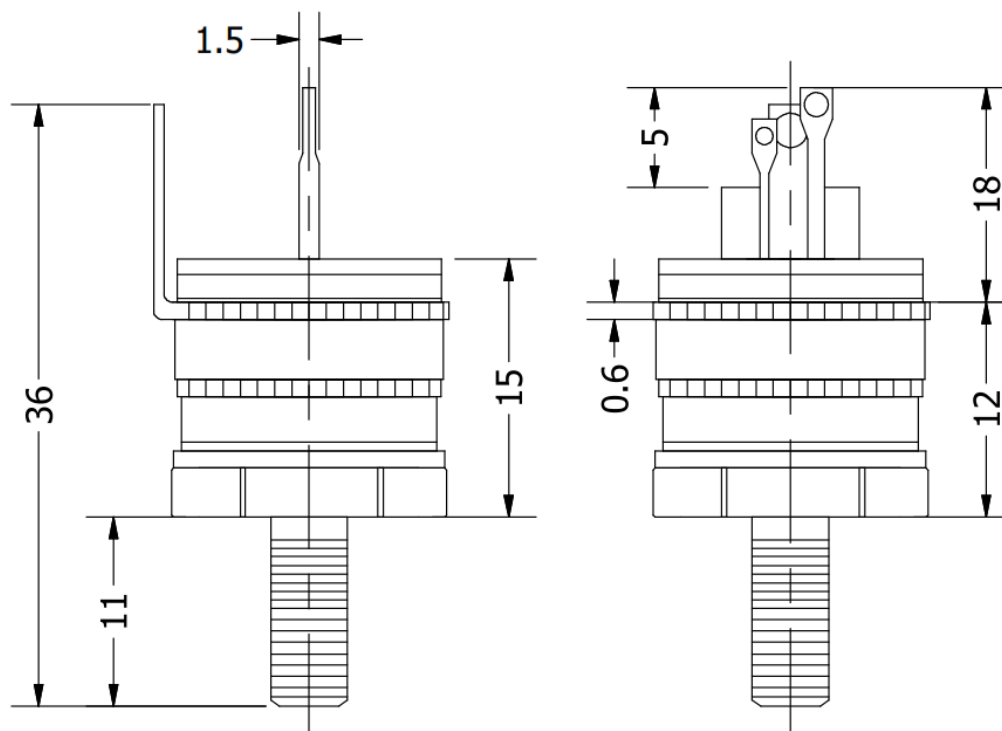

Ordering Table

NPIT	15	2,4,6
1	2	3

1 – Press Fit Isolated Stud Mount Triac

2 – Current, $I_{T(RMS)}$

3 – Voltage, V_{RRM} (See table)