


## features

- Anti-leaching nickel barrier terminations
- Twelve standard resistance values
- Suitable for reflow and wave soldering
- Marking: Black three-digit on pink body color
- Products with lead-free terminations meet RoHS requirements

## dimensions and construction

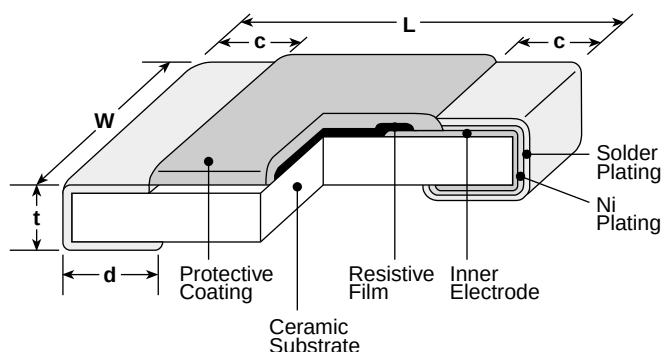

| Type<br>(Inch Size Code) | Dimensions inches (mm) |                         |                        |                                                                                   |                                                                                  |
|--------------------------|------------------------|-------------------------|------------------------|-----------------------------------------------------------------------------------|----------------------------------------------------------------------------------|
|                          | L                      | W                       | c                      | d                                                                                 | t                                                                                |
| <b>1J</b><br>(0603)      | .063±.008<br>(1.6±0.2) | .031±.004<br>(0.8±0.1)  | .012±.004<br>(0.3±0.1) | .012±.004<br>(0.3±0.1)                                                            | .02±.004<br>(0.5±0.1)                                                            |
| <b>2A</b><br>(0805)      | .079±.008<br>(2.0±0.2) | .049±.004<br>(1.25±0.1) | .016±.008<br>(0.4±0.2) | .012 <sup>+0.008</sup> <sub>-.004</sub><br>(0.3 <sup>+0.2</sup> <sub>-.01</sub> ) | .02 <sup>+0.008</sup> <sub>-.004</sub><br>(0.5 <sup>+0.2</sup> <sub>-.01</sub> ) |
| <b>2B</b><br>(1206)      | .126±.008<br>(3.2±0.2) | .063±.008<br>(1.6±0.2)  | .02±.008<br>(0.5±0.3)  | .016 <sup>+0.008</sup> <sub>-.004</sub><br>(0.4 <sup>+0.2</sup> <sub>-.01</sub> ) | .024±.004<br>(0.6±0.1)                                                           |

## ordering information

| New Part # | NT73 | 2A                               | T                                                                          | TD                                    | 103                                  | K                            | 3800                                         | J                           |
|------------|------|----------------------------------|----------------------------------------------------------------------------|---------------------------------------|--------------------------------------|------------------------------|----------------------------------------------|-----------------------------|
| Type       | Type | Size Code                        | Termination Material                                                       | Packaging                             | Nominal Resistance                   | Resistance Tolerance         | B Constant Nominal                           | B Constant Tolerance        |
|            |      | 1J: 0603<br>2A: 0805<br>2B: 1206 | T: Sn<br>(Other termination styles available, contact factory for options) | TD: 7" paper tape (5,000 pieces/reel) | 2 significant figures + 1 multiplier | J: ±5%<br>K: ±10%<br>L: ±15% | 3200<br>3500<br>3700<br>3800<br>3950<br>4100 | H: ±3%<br>J: ±5%<br>K: ±10% |

## applications and ratings

| Part Designation     | Resistance @ 25°C | Resistance Tolerance | B Constant @ 25°C/75°C | B Constant Tolerance | Thermal Dissipation Constant (mW/°C) | Power Rating (mW) | Operating Temperature Range |
|----------------------|-------------------|----------------------|------------------------|----------------------|--------------------------------------|-------------------|-----------------------------|
| <b>NEW</b><br>NT731J | 6.8kΩ             | J: ±5%<br>K: ±10%    | 3500K                  | ±10%                 | 2                                    | 5                 | -55°C to +125°C             |
|                      | 10kΩ              |                      | 3800K                  | ±5%                  |                                      |                   |                             |
|                      | 15kΩ              |                      | 3700K                  | ±3%                  |                                      |                   |                             |
|                      | 10kΩ              |                      |                        |                      |                                      |                   |                             |
|                      | 20kΩ              |                      |                        |                      |                                      |                   |                             |
|                      | 22kΩ              |                      | 3800K                  | ±5%                  |                                      |                   |                             |
|                      | 30kΩ              |                      |                        |                      |                                      |                   |                             |
|                      | 33kΩ              |                      |                        |                      |                                      |                   |                             |
|                      | 47kΩ              |                      |                        |                      |                                      |                   |                             |
|                      | 68kΩ              |                      |                        |                      |                                      |                   |                             |
|                      | 100kΩ             |                      |                        |                      |                                      |                   |                             |
|                      | 47kΩ              |                      | 4100K                  | ±3%                  |                                      |                   |                             |

For further information on packaging, please refer to Appendix A.

Specifications given herein may be changed at any time without prior notice. Please confirm technical specifications before you order and/or use.

1/05/06


### applications and ratings (continued)

| Part Designation | Resistance @ 25°C            | Resistance Tolerance | B Constant @ 25°C/75°C       | B Constant Tolerance | Thermal Dissipation Constant (mW/°C) | Power Rating (mW) | Operating Temperature Range |                    |       |      |   |   |  |  |
|------------------|------------------------------|----------------------|------------------------------|----------------------|--------------------------------------|-------------------|-----------------------------|--------------------|-------|------|---|---|--|--|
| NT732A           | 1kΩ                          | K: ±10%<br>L: ±15%   | 3200K                        | ±10%                 | 2.8                                  | 5                 | -55°C<br>to<br>+125°C       |                    |       |      |   |   |  |  |
|                  | 2kΩ                          |                      | 3500K                        |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 2.2kΩ                        |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 2.4kΩ                        |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 3.3kΩ                        |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 4.7kΩ                        |                      | J: ±5%<br>K: ±10%<br>L: ±15% |                      |                                      |                   |                             | 3800K              | ±5%   |      |   |   |  |  |
|                  | 5kΩ                          |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 6.8kΩ                        |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 10kΩ                         |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 15kΩ                         |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 10kΩ                         | 3950K                |                              | ±3%                  |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 20kΩ                         |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 22kΩ                         |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 30kΩ                         |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 33kΩ                         | 4100K                |                              | ±3%                  |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 47kΩ                         |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 68kΩ                         |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 100kΩ                        |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 150kΩ                        |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 10kΩ                         |                      |                              |                      |                                      |                   |                             | K: ±10%<br>L: ±15% | 3200K | ±10% | 3 | 5 |  |  |
|                  | 2.2kΩ                        | 3500K                |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 3.3kΩ                        |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 4.7kΩ                        |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
|                  | 6.8kΩ                        |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
| 10kΩ             | J: ±5%<br>K: ±10%<br>L: ±15% | 3800K                | ±5%                          |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
| 22kΩ             |                              |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
| 33kΩ             |                              |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
| 47kΩ             |                              |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
| 68kΩ             |                              |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |
| 100kΩ            |                              |                      |                              |                      |                                      |                   |                             |                    |       |      |   |   |  |  |

circuit protection

### environmental applications

#### Temperature Characteristics

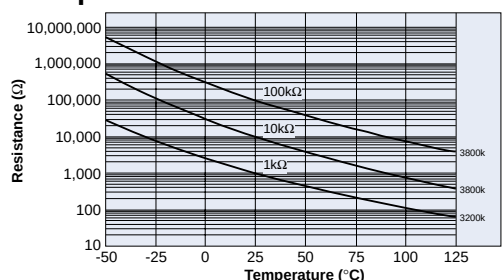

#### RT/R25 Ratio vs. B Constant

| Resistance | 1k Ω   | 5k Ω   | 10k Ω  | 100k Ω | 10k Ω  | Resistance | 1k Ω   | 5k Ω    | 10k Ω   | 100k Ω | 10k Ω   |
|------------|--------|--------|--------|--------|--------|------------|--------|---------|---------|--------|---------|
| B Constant | 3200K  | 3500K  | 3700K  | 3800K  | 4100K  | B Constant | 3200K  | 3500K   | 3700K   | 3800K  | 4100K   |
| Temp. (°C) | Ω      | k Ω    | k Ω    | k Ω    | k Ω    | Temp. (°C) | Ω      | k Ω     | k Ω     | k Ω    | k Ω     |
| -55        | 38770  | 273.24 | 638.23 | 7692.5 | 1203.1 | 40         | 604.07 | 2.8809  | 5.5500  | 54.959 | 5.1999  |
| -50        | 28840  | 197.67 | 465.81 | 5414.6 | 820.76 | 45         | 515.10 | 2.4202  | 4.6100  | 45.484 | 4.2349  |
| -45        | 21706  | 144.85 | 343.25 | 3864.5 | 568.09 | 50         | 441.00 | 2.0421  | 3.8500  | 37.823 | 3.4692  |
| -40        | 16517  | 107.43 | 255.22 | 2794.3 | 398.57 | 55         | 379.00 | 1.7302  | 3.2300  | 31.594 | 2.8585  |
| -35        | 12698  | 80.577 | 191.37 | 2045.2 | 283.20 | 60         | 326.90 | 1.4718  | 2.7200  | 26.506 | 2.3682  |
| -30        | 9857.0 | 61.077 | 144.64 | 1514.1 | 203.64 | 65         | 282.95 | 1.2568  | 2.3100  | 22.330 | 1.9721  |
| -25        | 7721.2 | 46.759 | 110.13 | 1133.0 | 148.07 | 70         | 245.72 | 1.0771  | 1.9700  | 18.886 | 1.6504  |
| -20        | 6100.5 | 36.137 | 83.710 | 856.49 | 108.37 | 75         | 214.08 | 0.92637 | 1.6800  | 16.035 | 1.3877  |
| -15        | 4858.7 | 28.173 | 64.190 | 653.63 | 80.182 | 80         | 187.08 | 0.79937 | 1.4500  | 13.663 | 1.1724  |
| -10        | 3899.0 | 22.147 | 49.640 | 503.31 | 59.943 | 85         | 163.96 | 0.69199 | 1.2500  | 11.682 | 0.99491 |
| -5         | 3151.3 | 17.546 | 38.680 | 390.86 | 45.252 | 90         | 144.11 | 0.60087 | 1.0800  | 10.022 | 0.84926 |
| 0          | 2564.2 | 14.004 | 30.370 | 305.97 | 34.478 | 95         | 127.00 | 0.52329 | 0.94000 | 8.6257 | 0.72802 |
| 5          | 2099.9 | 11.256 | 23.970 | 241.34 | 26.473 | 100        | 112.21 | 0.45701 | 0.82000 | 7.4466 | 0.62662 |
| 10         | 1730.0 | 9.1063 | 19.070 | 191.73 | 20.506 | 105        | 99.377 | 0.40016 | 0.72000 | 6.4466 | 0.54156 |
| 15         | 1433.5 | 7.4135 | 15.270 | 153.36 | 16.016 | 110        | 88.224 | 0.35129 | 0.63000 | 5.5968 | 0.46982 |
| 20         | 1194.2 | 6.0712 | 12.320 | 123.46 | 12.608 | 115        | 78.501 | 0.30915 | 0.56000 | 4.8721 | 0.40906 |
| 25         | 1000.0 | 5.0000 | 10.000 | 100.00 | 10.000 | 120        | 70.004 | 0.27272 | 0.49000 | 4.2523 | 0.35741 |
| 30         | 841.48 | 4.1398 | 8.1700 | 81.470 | 7.9880 | 125        | 62.558 | 0.24114 | 0.44000 | 3.7207 | 0.31332 |
| 35         | 711.39 | 3.4451 | 6.7100 | 66.739 | 6.4242 |            |        |         |         |        |         |

Note: RT/R25 ratio is the resistance at temperature (T) divided by the nominal resistance at 25°C. The RT/R25 ratio value is multiplied by the thermistor's nominal 25°C value to determine the nominal resistance value at a given temperature in the chart above.

### Performance Characteristics

| Parameter                                   | Maximum Δ R       | Test Method                                                                                |
|---------------------------------------------|-------------------|--------------------------------------------------------------------------------------------|
| High Temperature Exposure                   | ±3.0%             | 1000 hours @ 80°C                                                                          |
| Resistance to Solder Heat                   | ±1.0%             | MIL-R-55342 π 4.7.7, 260°C for 10 seconds                                                  |
| Terminal Strength-Bend                      | ±1.0%             | 2mm min. deflection in either direction for 10 seconds                                     |
| Moisture Resistance                         | ±3.0%             | MIL-STD-202, Method 103, 40°C, 90 - 95% RH, 1000 hours                                     |
| Life                                        | ±3.0%             | 80°C, DC 5mm, 1000 hours                                                                   |
| Temperature Cycling                         | ±3.0%             | 30 minutes @ -55°C, 15 minutes @ +25°C, 30 minutes @ +125°C, 15 minutes @ +25°C, 50 cycles |
| Dielectric Withstanding Voltage<br>2A<br>2B | 400V<br>400V      | 1 minute minimum<br>MIL-STD-202, Method 301                                                |
| Insulation Resistance                       | 10,000 MΩ Minimum | —                                                                                          |