

OL3392L

1310nm MQW DFB Laser Diode Uncooled Module with Single Mode Fiber


DESCRIPTION

The OKI OL3392L is a 1310nm DFB Laser Diode in a PCB mountable coaxial package with single mode fiber and without isolator.


FEATURES

- SMF output: 1mW
- Wide operating temperature range
- MQW process

OUTLINE DIMENSIONS

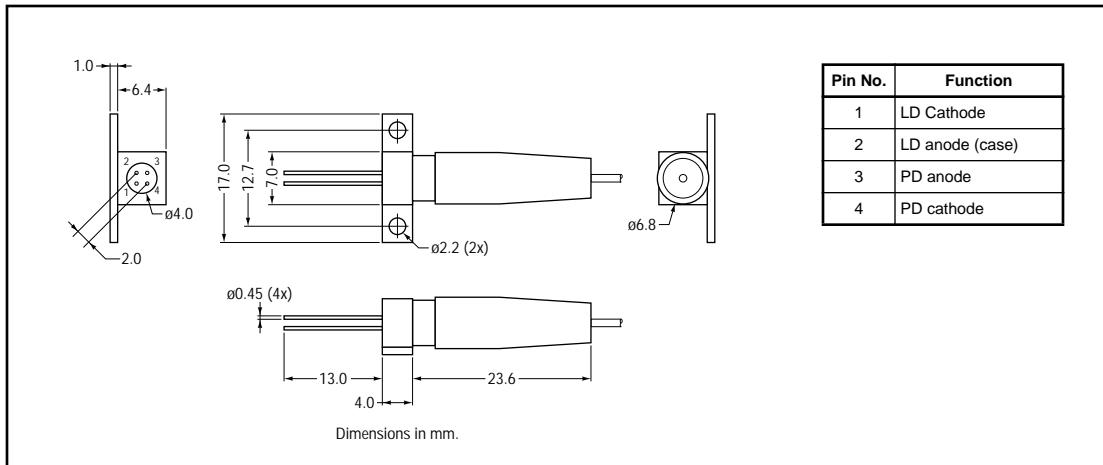

CIRCUIT



ELECTRICAL CHARACTERISTICS

Absolute Maximum Ratings^[1]

Parameter	Symbol	Rating	Unit
Fiber Output Power	P _f	2.4	mW
Laser Diode Forward Current	I _f (LD)	150	mA
Laser Diode Reverse Voltage	V _r (LD)	2	V
Photo Diode Forward Current	I _f (PD)	10	mA
Photo Diode Reverse Voltage	V _r (PD)	15	V
Operating Temperature	T _{opr}	0 to +65	°C
Storage Temperature	T _{stg}	-40 to +85	°C

1. Permanent device damage may occur if ABSOLUTE MAXIMUM RATINGS are exceeded. Functional operation should be restricted to the conditions as detailed in the operational sections of this data sheet. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Recommended Operating Conditions (T_A = 25 °C)

Parameter	Symbol	Condition	Rated Value			Unit
			Min	Typ	Max	
Threshold Current	I _{th}	-	-	20	40	mA
Fiber Output Power	P _f	I _f = I _{th} + 20 mA	1	-	-	mW
Forward Voltage	V _f	I _f = 30 mA	-	1.0	1.5	V
Peak Wavelength	λ _p	P _f = 1 mW	1290	1310	1330	nm
Side Mode Suppression Ratio	SMSR	P _f = 1 mW	30	-	-	dB
Relative Intensity Noise	RIN	f = 1 GHz, P _f = 1 mW	-	-	-120	dB/Hz
Rise Time	τ _r	I _{bias} = I _{th} P _f = 1 mW, 10-90%	-	0.3	-	ns
Fall Time	τ _f		-	0.5	-	ns
PD Dark Current	I _{dark}	V _r (PD) = 5 V	-	-	1	μA
Monitor Current	I _m	P _f = 1 mW, V _r (PD) = 5 V	70	-	-	μA
PD Capacitance	C _t	V _r (PD) = 5 V, f = 1 MHz	-	15	-	pF

Fiber Pigtail Specifications

Parameter	Rated Value	Unit
Type	SM	-
Mode Field Diameter	10 ±1	μm
Cladding Diameter	125 ±2	μm
Jacket Diameter	900	μm
Length	1 (Min.)	m
Connector	FC	-