


**HF RoHS Q2L Series - 3.3x3.3 QFN**

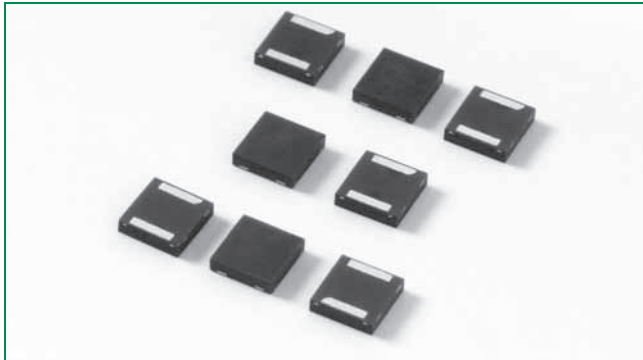

**Agency Approvals**

| Agency | Agency File Number |
|--------|--------------------|
|        | E133083            |

**Pinout Designation**

Not Applicable

**Schematic Symbol**



**Description**

Q2L Series 3.3x3.3 QFN are low capacitance SIDACTor® devices designed to protect high density broadband equipment from damaging overvoltage transients.

The series provides a low profile, chip scale surface mount solution that enables broadband equipment to comply with global regulatory standards while limiting the impact to broadband signals and board space.

**Features and Benefits**

- Low profile
- Small footprint
- Low capacitance
- Low voltage overshoot
- Low on-state voltage
- Does not degrade with use
- Fails short circuit when surged in excess of ratings

**Applicable Global Standards**

- TIA-968-A
- TIA-968-B
- ITU K.20/21 Enhanced Level
- ITU K.20/21 Basic Level
- GR 1089 Intra-building
- IEC 61000-4-5
- YD/T 1082
- YD/T 993
- YD/T 950
- GR 1089 Inter-building

**Electrical Characteristics**

| Part Number  | Marking | $V_{DRM}$<br>@ $I_{DRM}=5\mu A$ | $V_S$<br>@ 100V/ $\mu s$ | $I_H$  | $I_S$  | $I_T$ | $V_T @ I_T = 2.2 \text{ Amps}$ | Capacitance<br>@ 1MHz, 2V bias |        |
|--------------|---------|---------------------------------|--------------------------|--------|--------|-------|--------------------------------|--------------------------------|--------|
|              |         | V min                           | V max                    | mA min | mA max | A max | V max                          | pF min                         | pF max |
| P0080Q22CLRP | P-8C    | 6                               | 25                       | 50     | 800    | 2.2   | 5                              | 35                             | 75     |
| P0300Q22CLRP | P03C    | 25                              | 40                       | 50     | 800    | 2.2   | 5                              | 25                             | 45     |
| P0640Q22CLRP | P06C    | 58                              | 77                       | 150    | 800    | 2.2   | 5                              | 55                             | 85     |
| P0720Q22CLRP | P07C    | 65                              | 88                       | 150    | 800    | 2.2   | 5                              | 50                             | 75     |
| P0900Q22CLRP | P09C    | 75                              | 98                       | 150    | 800    | 2.2   | 5                              | 45                             | 70     |
| P1100Q22CLRP | P11C    | 90                              | 130                      | 150    | 800    | 2.2   | 5                              | 45                             | 70     |
| P1300Q22CLRP | P13C    | 120                             | 160                      | 150    | 800    | 2.2   | 5                              | 40                             | 60     |
| P1500Q22CLRP | P15C    | 140                             | 180                      | 150    | 800    | 2.2   | 5                              | 35                             | 55     |
| P1800Q22CLRP | P18C    | 170                             | 220                      | 150    | 800    | 2.2   | 5                              | 35                             | 50     |
| P2300Q22CLRP | P23C    | 190                             | 260                      | 150    | 800    | 2.2   | 5                              | 30                             | 50     |
| P2600Q22CLRP | P26C    | 220                             | 300                      | 150    | 800    | 2.2   | 5                              | 30                             | 45     |
| P3100Q22CLRP | P31C    | 275                             | 350                      | 150    | 800    | 2.2   | 5                              | 30                             | 45     |
| P3500Q22CLRP | P35C    | 320                             | 400                      | 150    | 800    | 2.2   | 5                              | 25                             | 40     |

Notes:

- Absolute maximum ratings measured at  $T_A = 25^\circ C$  (unless otherwise noted).
- Devices are bi-directional (unless otherwise noted).

## Surge Ratings

| Series | $I_{PP}$     |                             |                |                |                 | $I_{TSM}$  | di/dt             |
|--------|--------------|-----------------------------|----------------|----------------|-----------------|------------|-------------------|
|        | 2x10 $\mu$ s | 1.2x50 $\mu$ s/8x20 $\mu$ s | 10x160 $\mu$ s | 10x560 $\mu$ s | 10x1000 $\mu$ s | 50 / 60 Hz |                   |
|        | A min        | A min                       | A min          | A min          | A min           | A min      | Amps/ $\mu$ s max |
| C      | 500          | 400                         | 200            | 150            | 100             | 30         | 500               |


Notes:

- Peak pulse current rating ( $I_{PP}$ ) is repetitive and guaranteed for the life of the product.
- $I_{PP}$  ratings applicable over temperature range of -40°C to +85°C
- The device must initially be in thermal equilibrium with -40°C  $\leq T_J \leq$  +150°C


## Thermal Considerations

| Package                                                                                            | Symbol          | Parameter                               | Value       | Unit |
|----------------------------------------------------------------------------------------------------|-----------------|-----------------------------------------|-------------|------|
| <br>3.3 x 3.3 QFN | $T_J$           | Operating Junction Temperature Range    | -40 to +150 | °C   |
|                                                                                                    | $T_S$           | Storage Temperature Range               | -65 to +150 | °C   |
|                                                                                                    | $R_{\theta JA}$ | Thermal Resistance: Junction to Ambient | 120         | °C/W |


## V-I Characteristics

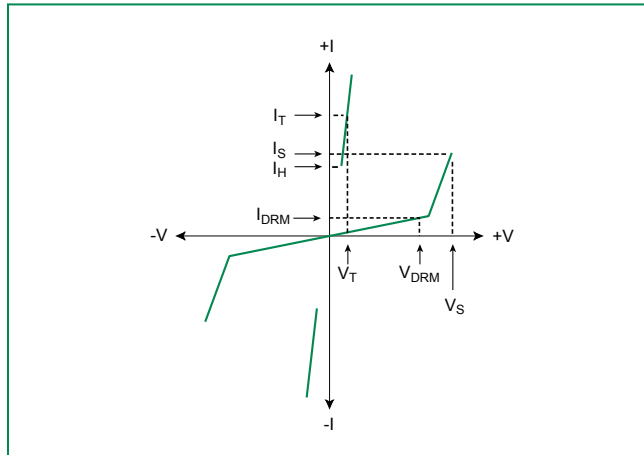


## $t_r \times t_d$ Pulse Waveform

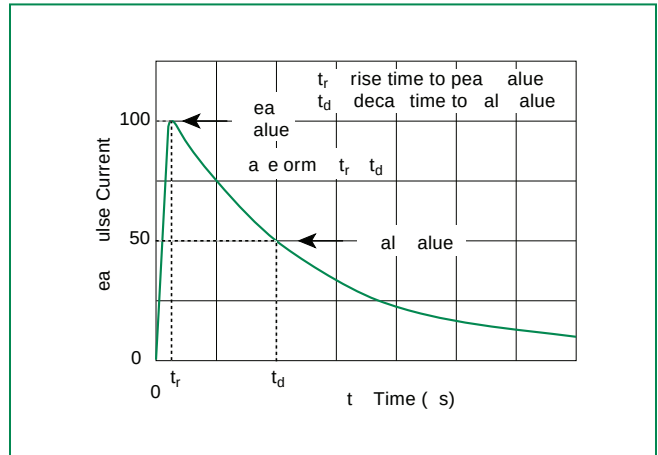

## Normalized $V_S$ Change vs. Junction Temperature

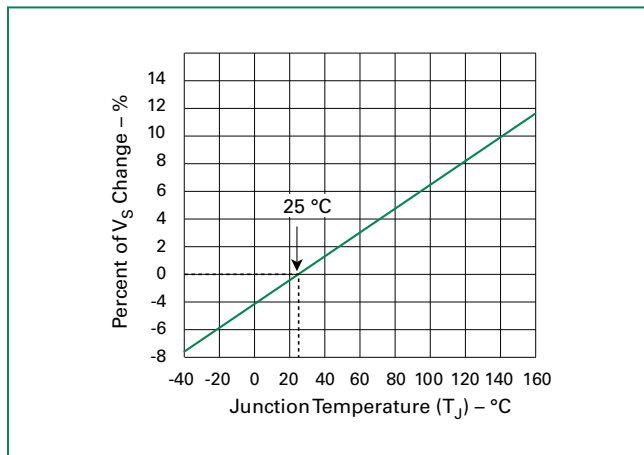


## Normalized DC Holding Current vs. Case Temperature

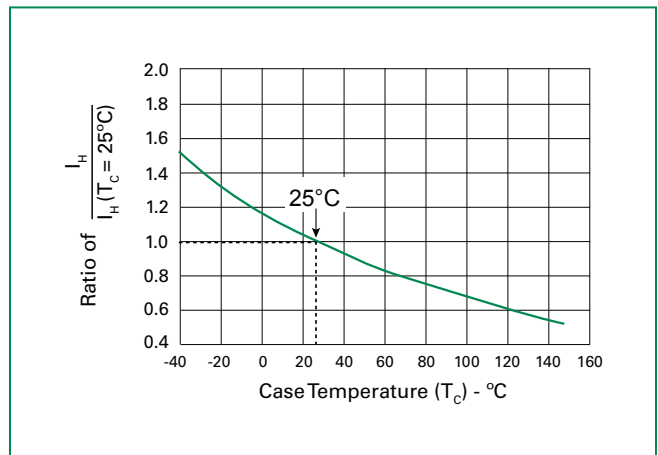

## Soldering Parameters

| Reflow Condition                                       |                                   | Pb-Free assembly<br>(see Fig. 1) |
|--------------------------------------------------------|-----------------------------------|----------------------------------|
| Pre Heat                                               | -Temperature Min ( $T_{s(min)}$ ) | +150°C                           |
|                                                        | -Temperature Max ( $T_{s(max)}$ ) | +200°C                           |
|                                                        | -Time (Min to Max) ( $t_s$ )      | 60-180 secs.                     |
| Average ramp up rate (Liquidus Temp ( $T_L$ ) to peak) |                                   | 3°C/sec. Max.                    |
| $T_{s(max)}$ to $T_L$ - Ramp-up Rate                   |                                   | 3°C/sec. Max.                    |
| Reflow                                                 | -Temperature ( $T_L$ ) (Liquidus) | +217°C                           |
|                                                        | -Temperature ( $t_L$ )            | 60-150 secs.                     |
| Peak Temp ( $T_p$ )                                    |                                   | +260(+0/-5)°C                    |
| Time within 5°C of actual Peak Temp ( $t_p$ )          |                                   | 30 secs. Max.                    |
| Ramp-down Rate                                         |                                   | 6°C/sec. Max.                    |
| Time 25°C to Peak Temp ( $T_p$ )                       |                                   | 8 min. Max.                      |
| Do not exceed                                          |                                   | +260°C                           |

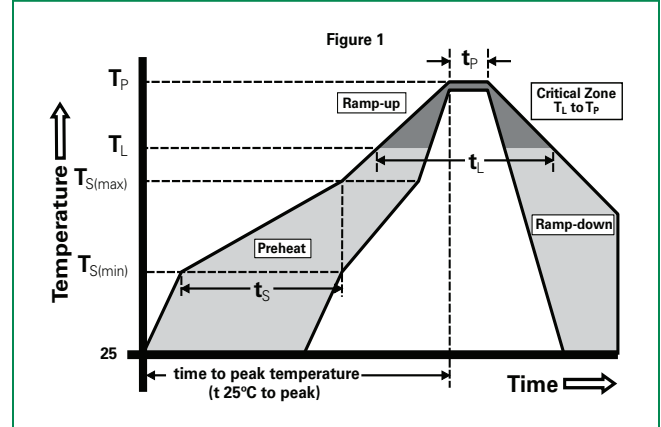


## Physical Specifications

|                        |                                                               |
|------------------------|---------------------------------------------------------------|
| <b>Lead Material</b>   | Copper Alloy                                                  |
| <b>Terminal Finish</b> | 100% Matte-Tin Plated                                         |
| <b>Body Material</b>   | UL recognized epoxy meeting flammability classification 94V-0 |

## Environmental Specifications


|                                   |                                                                                                                        |
|-----------------------------------|------------------------------------------------------------------------------------------------------------------------|
| <b>High Temp Voltage Blocking</b> | 80% Rated $V_{DRM}$ ( $V_{AC Peak}$ ) +125°C or +150°C, 504 or 1008 hrs. MIL-STD-750 (Method 1040) JEDEC, JESD22-A-101 |
| <b>Temp Cycling</b>               | -65°C to +150°C, 15 min. dwell, 10 up to 100 cycles. MIL-STD-750 (Method 1051) EIA/JEDEC, JESD22-A-104                 |
| <b>Biased Temp &amp; Humidity</b> | 52 $V_{DC}$ (+85°C) 85%RH, 504 up to 1008 hrs. EIA/JEDEC, JESD22-A-101                                                 |
| <b>High Temp Storage</b>          | +150°C 1008 hrs. MIL-STD-750 (Method 1031) JEDEC, JESD22-A-101                                                         |
| <b>Low Temp Storage</b>           | -65°C, 1008 hrs.                                                                                                       |
| <b>Thermal Shock</b>              | 0°C to +100°C, 5 min. dwell, 10 sec. transfer, 10 cycles. MIL-STD-750 (Method 1056) JEDEC, JESD22-A-106                |
| <b>Resistance to Solder Heat</b>  | +260°C, 30 secs. MIL-STD-750 (Method 2031)                                                                             |
| <b>Moisture Sensitivity Level</b> | 85%RH, +85°C, 168 hrs., 3 reflow cycles (+260°C Peak). JEDEC-J-STD-020, Level 1                                        |

## Dimensions — 3.3x3.3 QFN

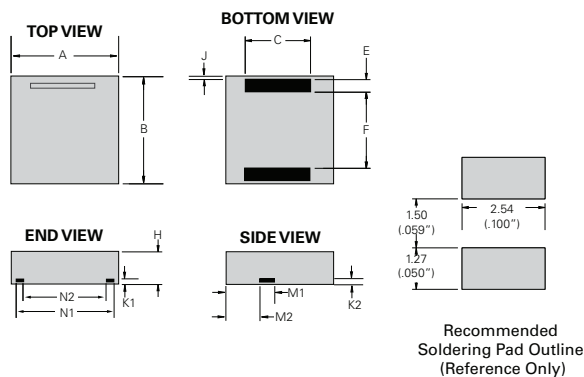


| Dimensions | Inches |       | Millimeters |       |
|------------|--------|-------|-------------|-------|
|            | Min    | Max   | Min         | Max   |
| A          | 0.126  | 0.134 | 3.200       | 3.400 |
| B          | 0.126  | 0.134 | 3.200       | 3.400 |
| C          | 0.075  | 0.083 | 1.900       | 2.100 |
| E          | 0.011  | 0.019 | 0.285       | 0.485 |
| F          | 0.088  | 0.096 | 2.230       | 2.430 |
| H          | 0.035  | 0.043 | 0.900       | 1.100 |
| J          | 0.000  | 0.008 | 0.000       | 0.200 |
| K1         | 0.004  | 0.012 | 0.100       | 0.300 |
| K2         | 0.004  | 0.012 | 0.100       | 0.300 |
| M1         | 0.063  | 0.071 | 1.610       | 1.810 |
| M2         | 0.045  | 0.053 | 1.153       | 1.353 |
| N1         | 0.095  | 0.103 | 2.420       | 2.620 |
| N2         | 0.082  | 0.090 | 2.080       | 2.280 |

## Part Numbering

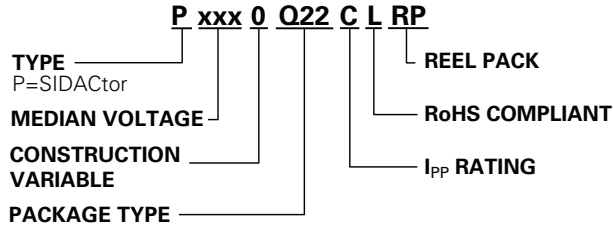

## Part Marking

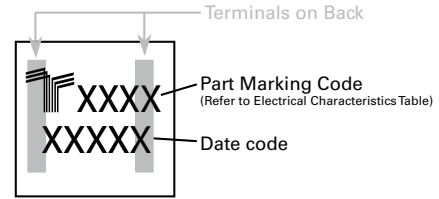


## Packing Options


| Package Type | Description                    | Quantity | Added Suffix | Industry Standard |
|--------------|--------------------------------|----------|--------------|-------------------|
| Q22          | 3.3x3.3 QFN Tape and Reel Pack | 5000     | RP           | EIA-481-D         |

## Tape and Reel Specifications — 3.3x3.3 QFN


### Reel Dimension

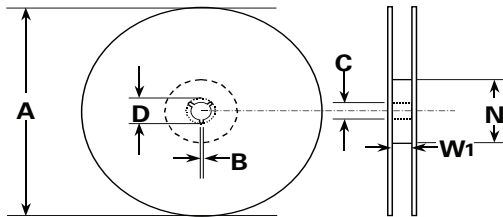

### Tape Leader and Trailer Dimensions

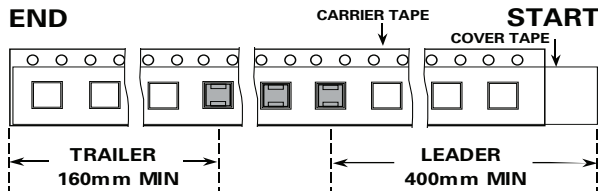

### Tape Dimension Items

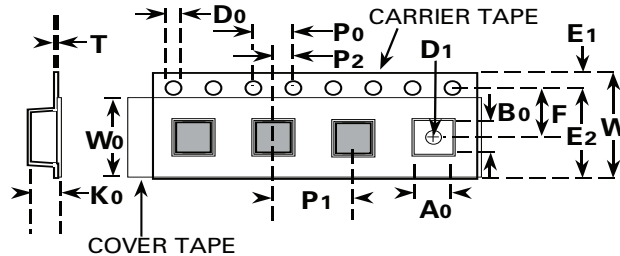

| Symbols        | Description                             | Inches |        | Millimeters |       |
|----------------|-----------------------------------------|--------|--------|-------------|-------|
|                |                                         | Min    | Max    | Min         | Max   |
| A              | Reel Diameter                           | N/A    | 12.992 | N/A         | 330.0 |
| B              | Drive Spoke Width                       | 0.059  | N/A    | 1.50        | N/A   |
| C              | Arbor Hole Diameter                     | 0.504  | 0.531  | 12.80       | 13.50 |
| D              | Drive Spoke Diameter                    | 0.795  | N/A    | 20.20       | N/A   |
| N              | Hub Diameter                            | 1.969  | N/A    | 50.00       | N/A   |
| W <sub>1</sub> | Reel Inner Width at Hub                 | 0.488  | 0.567  | 12.40       | 14.40 |
| A <sub>0</sub> | Pocket Width at Bottom                  | 0.138  | 0.146  | 3.50        | 3.70  |
| B <sub>0</sub> | Pocket Length at Bottom                 | 0.138  | 0.146  | 3.50        | 3.70  |
| D <sub>0</sub> | Feed Hole Diameter                      | 0.059  | 0.063  | 1.50        | 1.60  |
| D <sub>1</sub> | Pocket Hole Diameter                    | 0.059  | N/A    | 1.50        | N/A   |
| E <sub>1</sub> | Feed Hole Position 1                    | 0.065  | 0.073  | 1.65        | 1.85  |
| E <sub>2</sub> | Feed Hole Position 2                    | 0.400  | 0.408  | 10.15       | 10.35 |
| F              | Feed Hole Center - Pocket Hole Center 2 | 0.215  | 0.219  | 5.45        | 5.55  |
| K <sub>0</sub> | Pocket Depth                            | 0.039  | 0.051  | 1.00        | 1.30  |
| P <sub>0</sub> | Feed Hole Pitch                         | 0.153  | 0.161  | 3.90        | 4.10  |
| P <sub>1</sub> | Component Spacing                       | 0.311  | 0.319  | 7.90        | 8.10  |
| P <sub>2</sub> | Feed Hole Center - Pocket Hole Center 1 | 0.077  | 0.081  | 1.90        | 2.05  |
| T              | Carrier Tape Thickness                  | 0.010  | 0.014  | 0.25        | 0.35  |
| W              | Embossed Carrier Tape Width             | 0.453  | 0.484  | 11.50       | 12.30 |
| W <sub>0</sub> | Cover Tape Width                        | 0.358  | 0.366  | 9.10        | 9.30  |