

Surface Mount Rectifiers

P80JC--P80KC

Features

- Planar passivated chips
- Ultra low leakage reverse current
- High temperature performance
- High surge current capability
- RoHS Compliant



Mechanical Data

- Case: SMC molded plastic
- Molding compound, UL flammability classification rating 94V-0
- Terminals: Solder plated, solderable per MIL-STD-202, Method 208
- Polarity: Color band denotes cathode end

Maximum Ratings (@T_A = 25°C unless otherwise specified)

Characteristic	Symbol	P80JC	P80KC	Units
Peak repetitive reverse voltage	V _{RRM}	600	800	V
RMS reverse voltage	V _{RMS}	420	560	V
DC blocking voltage	V _{DC}	600	800	V
Maximum average forward output current	I _{F(AV)}	8.0		A
Peak forward surge current, 8.3ms single half-sine-wave	@T _J = 25°C I _{FSM}	200		A

Thermal Characteristics

Parameter	Symbol	P80JC	P80KC	Units
Typical thermal resistance (Note 1)	R _{ΘJA}	55		°C /W
	R _{ΘJC}	15		
	R _{ΘJL}	10		
Operating junction temperature range	T _J	- 55 ---- + 150		°C
Storage temperature range	T _{STG}	- 55 ---- + 150		°C

Note:

1. Device mounted on PCB with 10 mm x 20 mm x 0.1mm copper pad areas

Surface Mount Rectifiers**P80JC--P80KC****Electrical Characteristics** (@ $T_A = 25^{\circ}\text{C}$ unless otherwise specified)

Parameter	Symbol	Test conditions		Typ.	Max.	Units
Maximum instantaneous forward voltage	V_F	$I_F=8.0\text{A}$		0.95	1.0	V
Maximum Reverse current	I_R	Rated V_R	@ $T_A=25^{\circ}\text{C}$	0.2	1.0	μA
			@ $T_A=150^{\circ}\text{C}$	40	100	

Surface Mount Rectifiers

P80JC--P80KC

Ratings and Characteristic Curves ($T_A=25^\circ\text{C}$ unless otherwise noted)

Fig.1-Forward Current Derating Curve

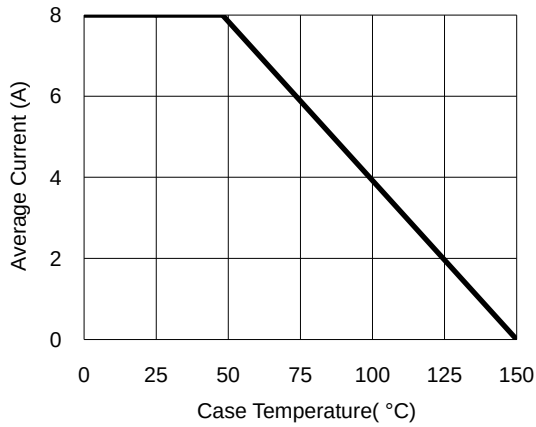


Fig.2- Surge Current Derating Curve

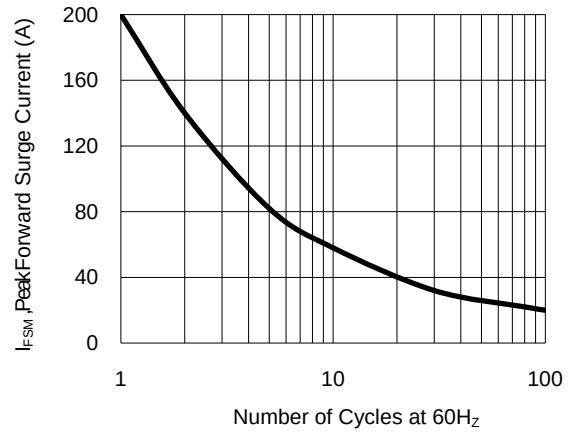


Fig.3- Typical Forward Voltage Characteristic


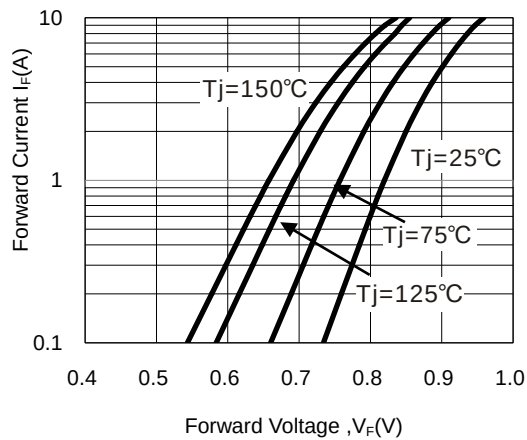



Fig.4- Typical Reverse Characteristic

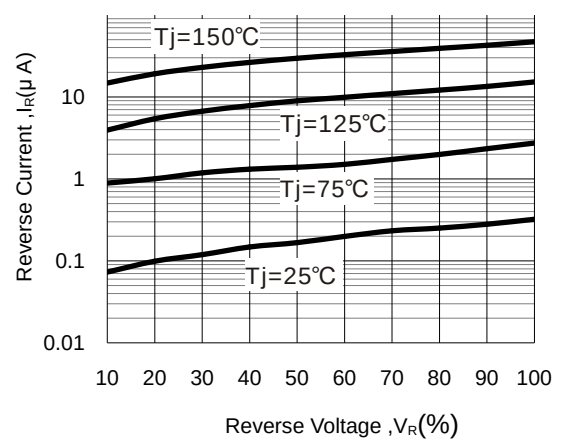


Surface Mount Rectifiers

P80JC--P80KC

Package Outline Dimensions(unit:mm)

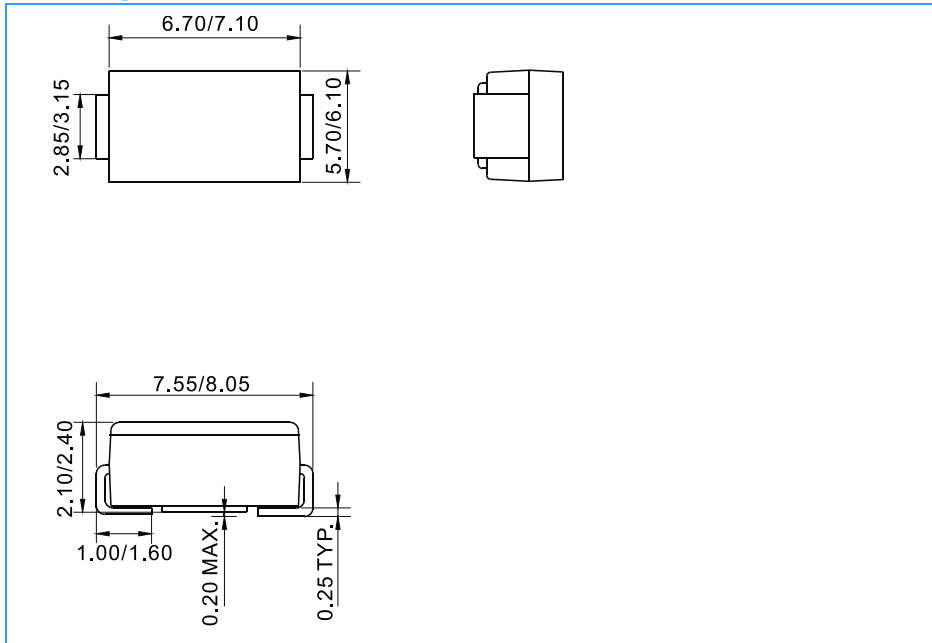

Mounting Pad Layout(unit:mm)

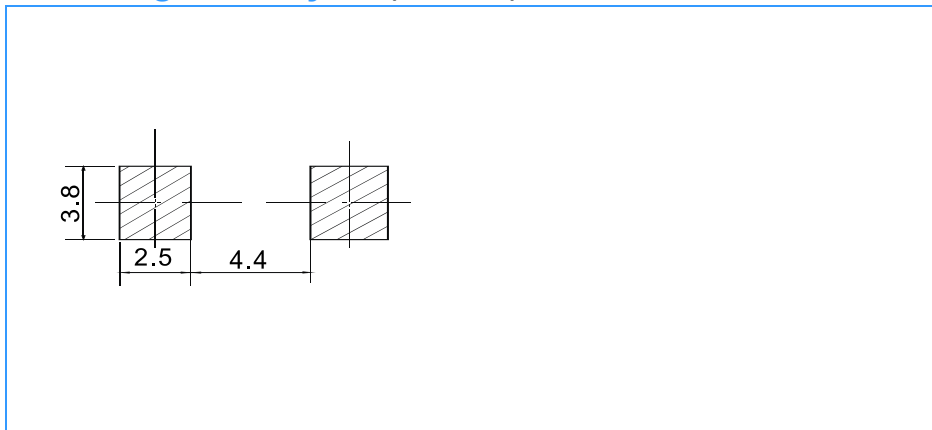

Ordering Information

Part No.	Marking	Package	Shipping
P80JC	P80JC	SMC	3000 /Tape&Reel
P80KC	P80KC	SMC	3000 /Tape&Reel