

DROP-IN ISO-ATTENUATOR

Features

- Low Cost and **RoHS** Compliant
- Industry Standard 1 Inch Drop-in package
- Designed for Wireless Telecom Systems
- 50 Ohms Characteristic Impedance



Description

The PA0853DG-41H is a small low cost drop-in Iso-Attenuator designed for applications in high performance linear power amplifiers for wireless base stations. These Iso-Attenuators feature a robust construction for high reliability with excellent IMD performance.

These units are built Lead-Free and RoHS compliant.

CCW rotation and special tab offsets available on request.

S-Parameters are also available on request.

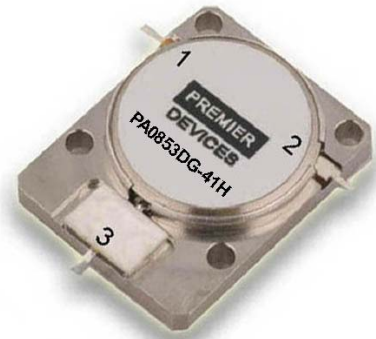


Specifications


Parameter	Minimum	Typical	Maximum
Frequency Range (MHz)	825		880
Insertion Loss (dB)		<. 18	.30
Isolation (dB)	20	>25	
Return Loss (dB)	20	>30	
Attenuation (dB)	29	30	31
IMD (dBc) 2T x 37.5 Watts	-70	-75	

Note: Typical values represent Mid-band performance @ 25°.

Schematic




Package

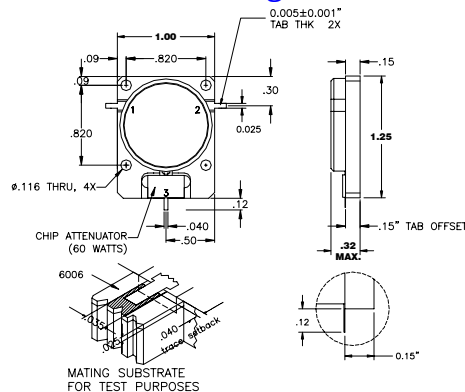


Pin Functions

Function	Pin
INPUT	1
OUTPUT	2
ATTENUATION	3

Typical Test Data – Insertion Loss

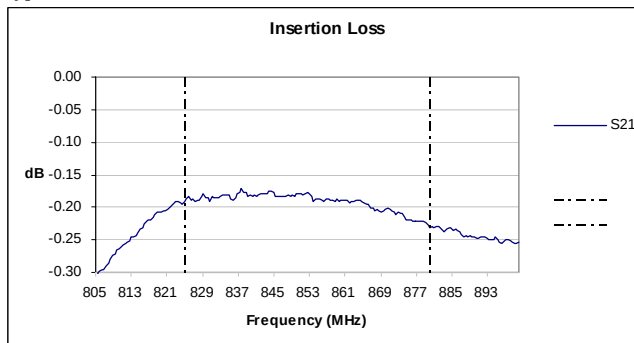

Typical Test Data – Return Loss and Isolation

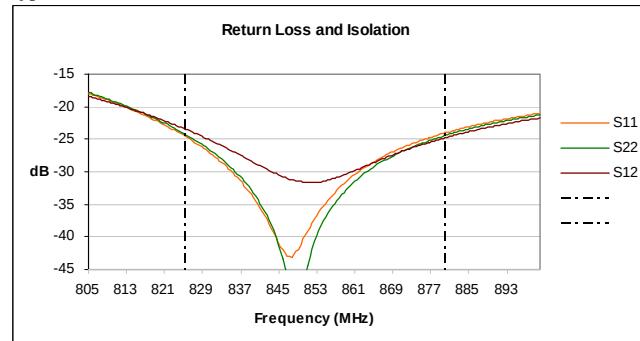

Specifications and information on this data sheet are subject to change without notice.