


Key Features

- 2.5W Output at 10% THD with a 4Ω Load and 5V Power Supply
- Filterless, Low Quiescent Current and Low EMI
- High Efficiency up to 88%
- Superior Low Noise
- Short Circuit Protection
- Thermal Shutdown
- Few External Components to Save Space and Cost
- MSOP-8, SOP-8 and DFN3x3 Packages Available
- Pb-Free Package

Applications

- PMP/MP4
- GPS
- Portable Speakers
- Walkie Talkie
- Handsfree phones/Speaker Phones
- Cellular Phones

Typical Application

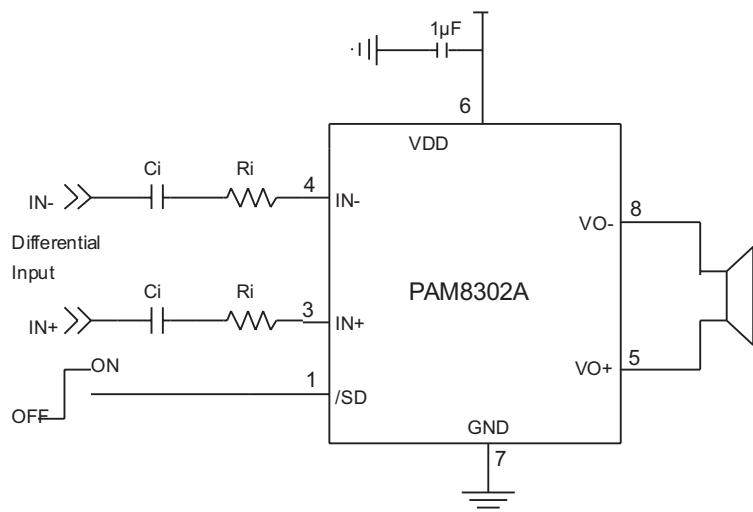

General Description


The PAM8302A is a 2.5W class-D mono audio amplifier. Its low THD+N feature offers high-quality sound reproduction. The new filterless architecture allows the device to drive speaker directly instead of using low-pass output filters, therefore save system cost and PCB area.

With the same number of external components, the efficiency of the PAM8302A is much better than that of class-AB cousins. It can optimize battery life thus is ideal for portable applications.



The PAM8302A is available in MSOP-8, SOP-8 and DFN3x3 packages.

Block Diagram

www.datasheet4u.com

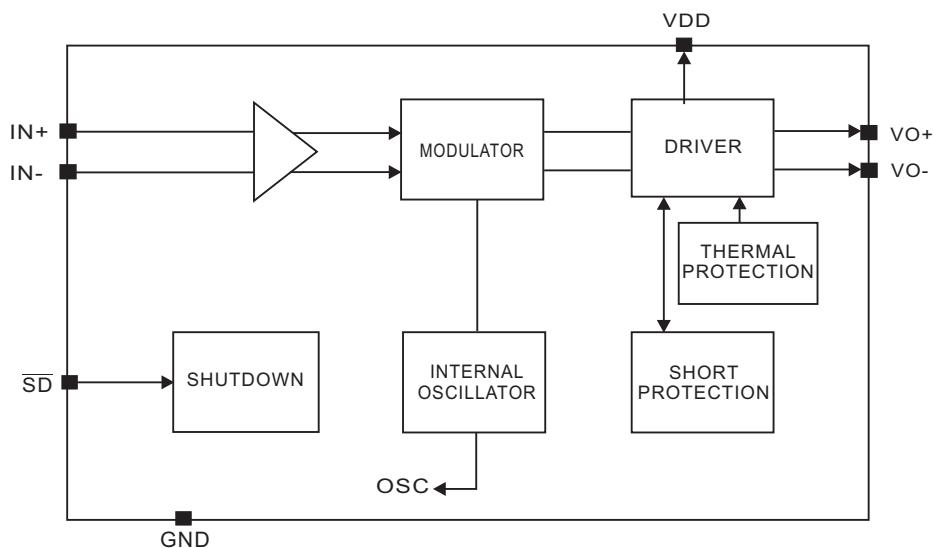

Pin Configuration & Marking Information

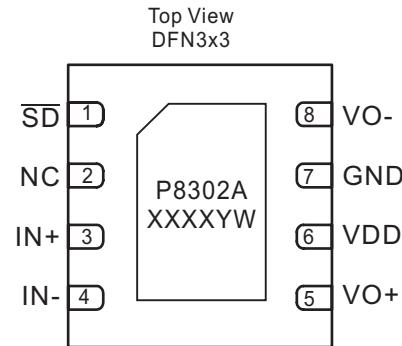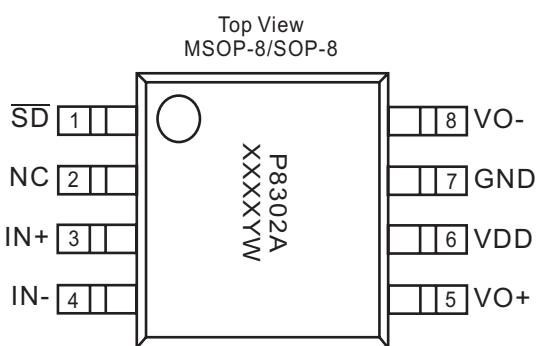

X: Internal Code
Y: Year
W: Week

Pin Number	Pin name	Description
1	SD	Shutdown terminal ,active low
2	NC	No connection
3	IN+	Positive differential input
4	IN-	Negative differential input
5	VO+	Positive BTL output
6	VDD	Analog power supply
7	GND	Ground
8	VO-	Negative BTL output



Absolute Maximum Ratings

These are stress ratings only and functional operation is not implied. Exposure to absolute maximum ratings for prolonged time periods may affect device reliability. All voltages are with respect to ground.

Supply Voltage at no Input Signal.....	6.6V	Maximum Junction Temperature.....	150°C
Input Voltage.....	-0.3V to $V_{DD} + 0.3V$	Storage Temperature.....	-65°C to 150°C
		Soldering Temperature.....	300°C, 5sec

Recommended Operating Conditions

Supply voltage Range.....	2.5V to 5.5V	Ambient Operation Temperature Range.....	-40°C to 85°C
Max. Supply Voltage (for Max. duration of 30 minutes).....	6.0V	Junction Temperature Range.....	-40°C to 125°C

Thermal Information

Parameter	Symbol	Package	Maximum	Unit
Thermal Resistance (Junction to ambient)	θ_{JA}	SOP-8	115	°C/W
		MSOP-8	180	°C/W
		DFN 3x3-8	47.9	°C/W



PAM8302A

2.5W Filterless Class-D Mono Audio Amplifier

Electrical Characteristic

$V_{DD}=5V$, Gain = 24dB, $R_L=4\Omega$, $T_A=25^\circ C$, unless otherwise noted.

www.datasheet4u.com	PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
	Supply Voltage Range	V_{DD}		2.5		5.5	V
	Quiescent Current	I_Q	No Load		4	8	mA
	Shutdown Current	I_{SHDN}	$V_{SHDN}=0V$			1	μA
Output Power	P_o	$f=1kHz, R_L=4\Omega$	$V_{DD}=5V$	2.50			W
			$V_{DD}=3.6V$	1.25			
		$f=1kHz, R_L=4\Omega$	$V_{DD}=5V$	2.00			
			$V_{DD}=3.6V$	0.95			
		$f=1kHz, R_L=8\Omega$	$V_{DD}=5V$	1.50			
			$V_{DD}=3.6V$	0.80			
		$F=1kHz, R_L=8\Omega$	$V_{DD}=5V$	1.30			
			$V_{DD}=3.6V$	0.65			
Peak Efficiency	η	$f=1kHz$		85	88		%
Total Harmonic Distortion Plus Noise	THD+N	$R_L = 8\Omega, P_o=0.1W, f=1kHz$		0.30			%
		$R_L = 8\Omega, P_o=0.5W, f=1kHz$		0.45			
		$R_L = 4\Omega, P_o=0.1W, f=1kHz$		0.35			
		$R_L = 4\Omega, P_o=0.5W, f=1kHz$		0.40			
Gain	Gv			24			dB
Power Supply Ripple Rejection	PSRR	No input, $f=1kHz, V_{pp}=200mV$		45	50		dB
Dynamic Range	Dyn	$f=20$ to $20kHz$		90			dB
Signal to Noise Ratio	SNR	$f = 20$ to $20kHz$		80			dB
Noise	V_n	No A-weighting		180			μV
		A-weighting		120			
Oscillator Frequency	f_{osc}			200	250	300	kHz
Drain-Source On-State Resistance	$R_{DS(ON)}$	$I_{DS}=100mA$	P MOSFET		0.45		Ω
			N MOSFET		0.20		
SHDN Input High	V_{SH}			1.2			V
SHDN Input Low	V_{SL}					0.4	V
Over Temperature Protection	OTP				135		°C
Over Temperature Hysteresis	OTH				30		°C


Typical Performance Characteristics

$T_A=25^\circ\text{C}$, unless otherwise noted.

www.datasheet4u.com


THD+N VS Output Power

$R_L=8\Omega$, Gain=23dB, $f=1\text{kHz}$

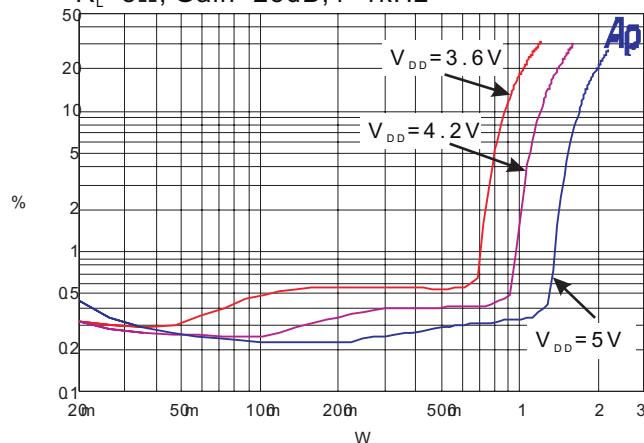


THD+N VS Frequency

$R_L=8\Omega$, $C_{in}=0.1\mu\text{F}$, Gain=23dB, $V_{DD}=5\text{V}$

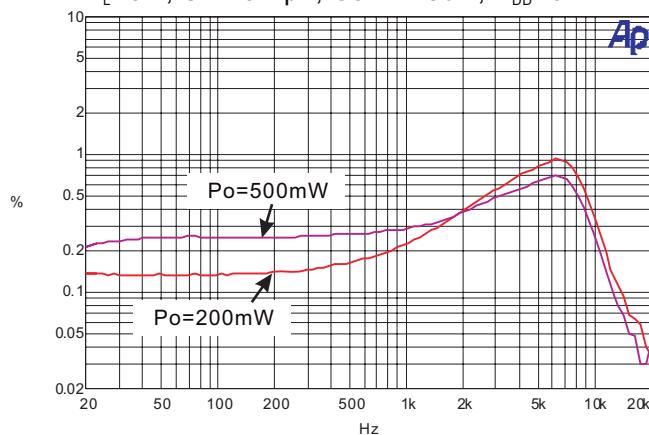


THD+N VS Frequency

$R_L=4\Omega$, $C_{in}=0.1\mu\text{F}$, Gain=23dB, $V_{DD}=5\text{V}$

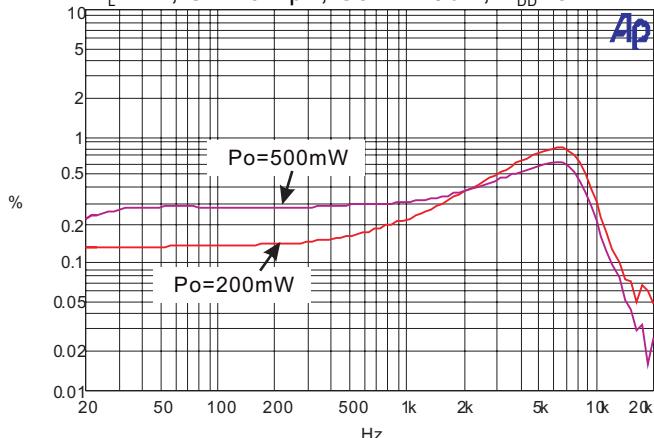


THD+N VS Output Power

$R_L=4\Omega$, Gain=23dB, $f=1\text{kHz}$

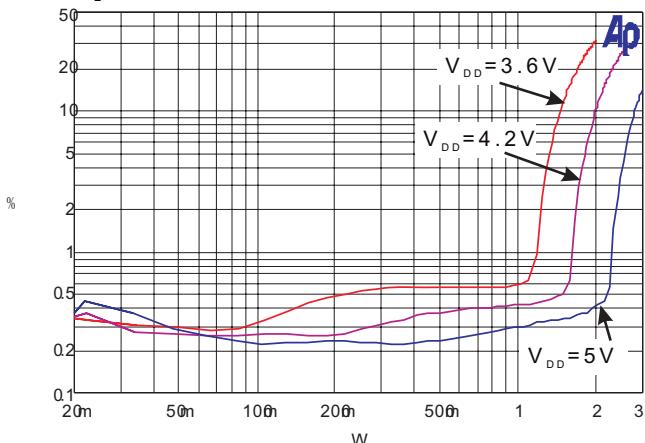


THD+N VS Frequency

$R_L=8\Omega$, $C_{in}=0.1\mu\text{F}$, Gain=23dB, $V_{DD}=3.6\text{V}$

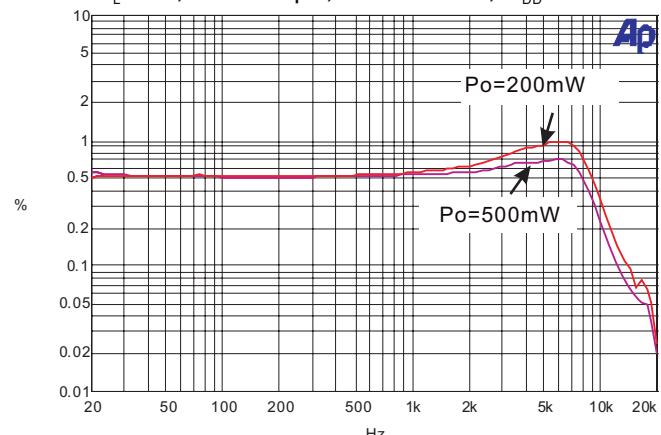







THD+N VS Frequency

$R_L=4\Omega$, $C_{in}=0.1\mu\text{F}$, Gain=23dB, $V_{DD}=3.6\text{V}$

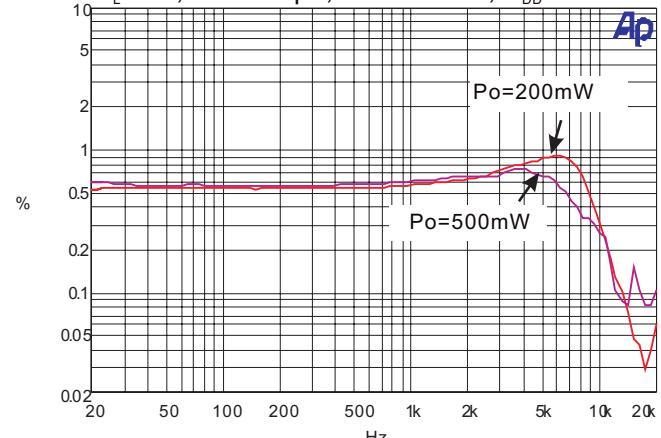

Typical Performance Characteristics

$T_A=25^\circ\text{C}$, unless otherwise noted.

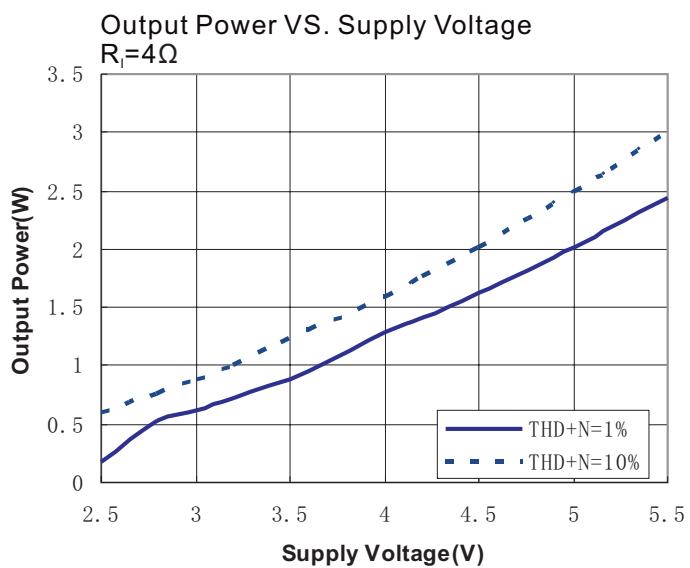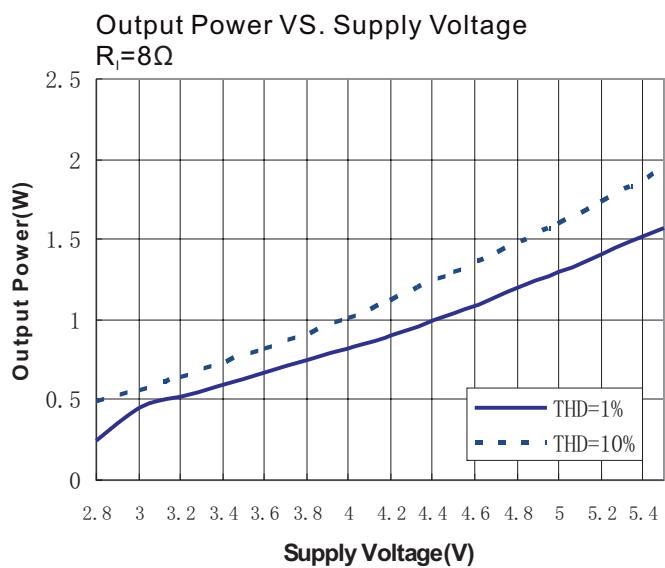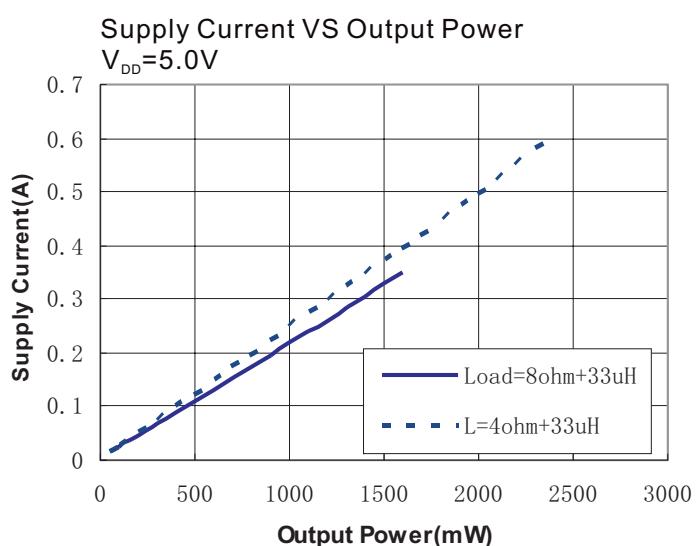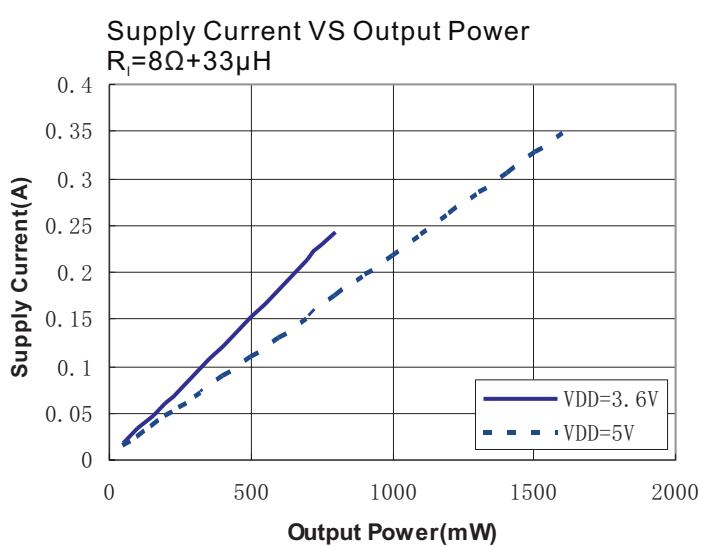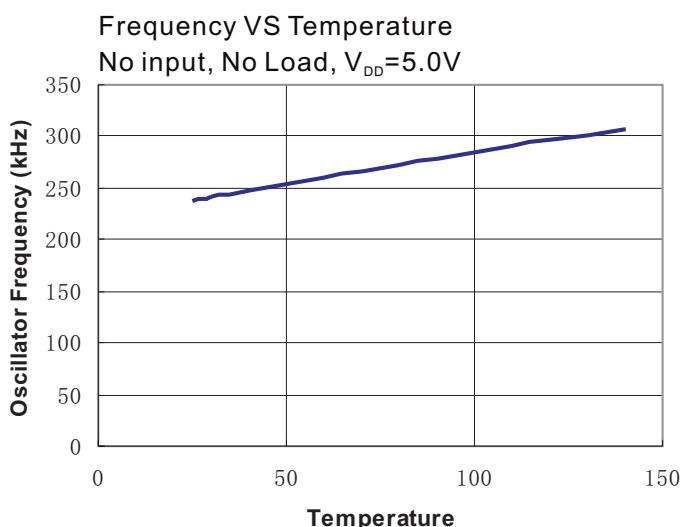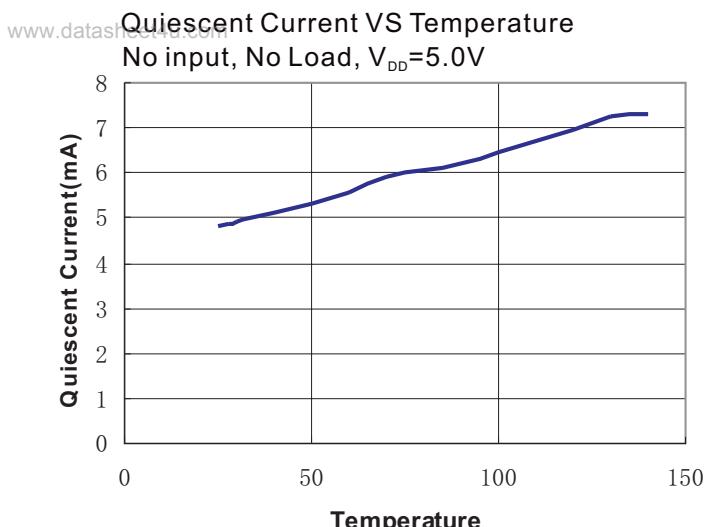


Typical Performance Characteristics

$T_A=25^\circ\text{C}$, unless otherwise noted.


www.datasheet4u.com

Efficiency VS Output Power

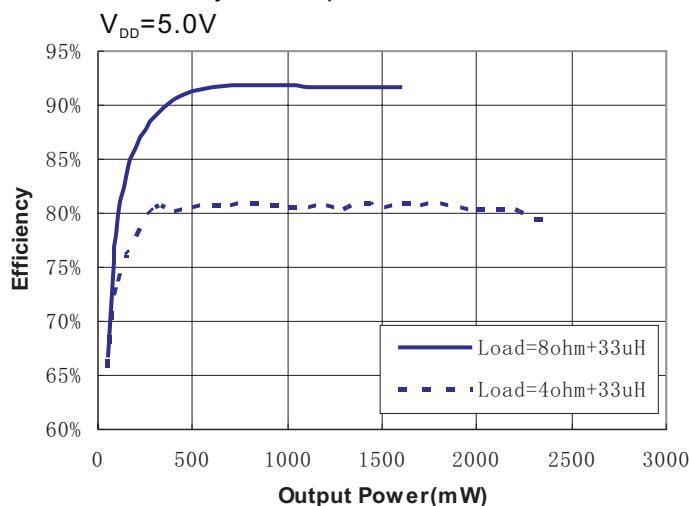


Efficiency VS Output Power


$R_i=8\Omega+33\mu\text{H}$

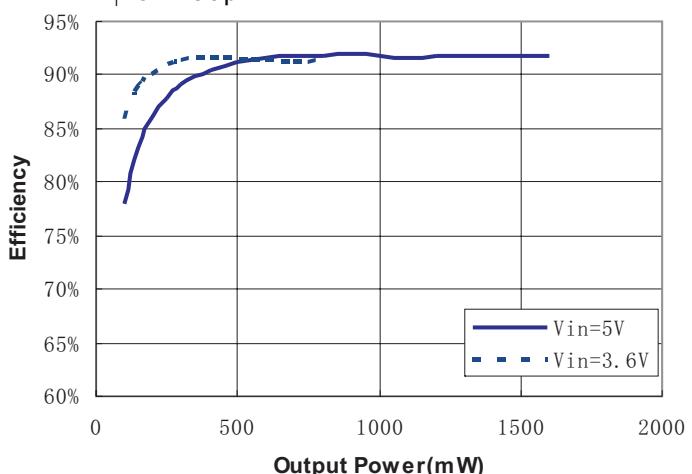

Quiescent Current VS. Supply Voltage
No load

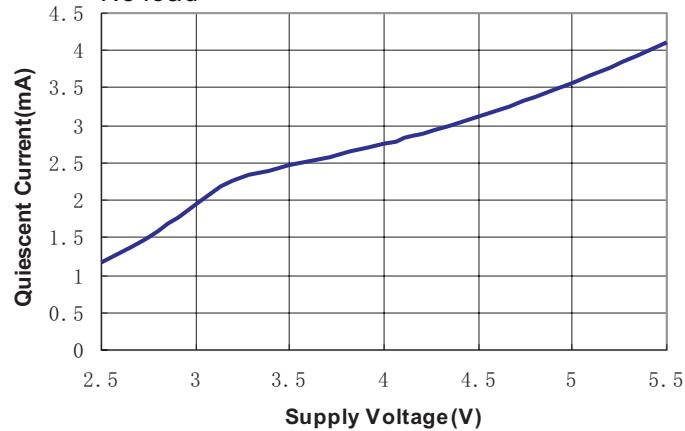


Frequency VS. Supply Voltage

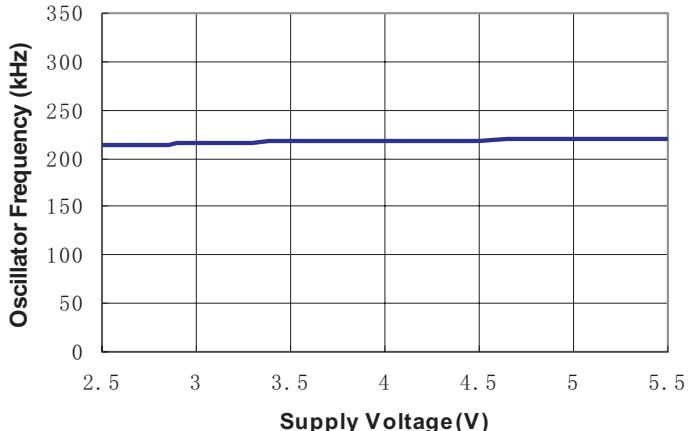


Power Dissipation VS. Output Power

$R_i=8\Omega$

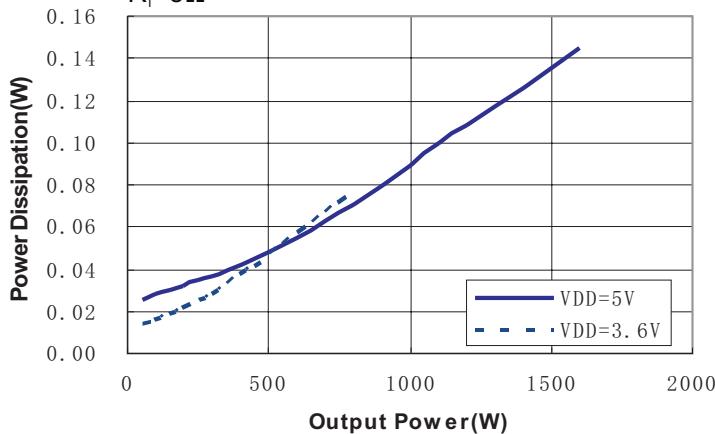

Test Setup for Performance Testing

www.datasheet4u.com

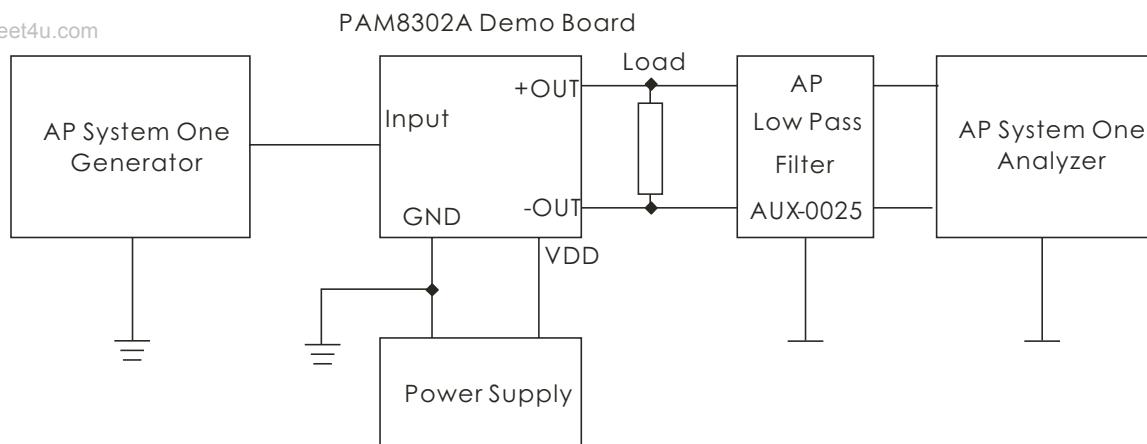

Notes

1. The AP AUX-0025 low pass filter is necessary for every class-D amplifier measurement with AP analyzer.
2. Two 22 μ H inductors are used in series with load resistor to emulate the small speaker for efficiency measurement.

Application Information

Maximum Gain

www.datasheet4u.com

As shown in block diagram (page 2), the PAM8302A has two internal amplifier stages. The first stage's gain is externally configurable, while the second stage's is internally fixed. The closed-loop gain of the first stage is set by selecting the ratio of R_f to R_i while the second stage's gain is fixed at 2x. The output of amplifier 1 serves as the input to amplifier 2, thus the two amplifiers produce signals identical in magnitude, but different in phase by 180°. Consequently, the differential gain for the IC is

$$A_{VD} = 20 \cdot \log [2 \cdot (R_f/R_i)]$$

The PAM8302A sets maximum $R_f=80\text{k}\Omega$, minimum $R_i=10\text{k}\Omega$, so the maximum closed-gain is 24dB.

Input Capacitors (C_i)

In typical application, an input capacitor, C_i , is required to allow the amplifier to bias input signals to a proper DC level for optimum operation. In this case, C_i and the minimum input impedance R_i (10k internal) form a high pass filter with a corner frequency determined by the following equation:

$$f_c = \frac{1}{(2\pi R_i C_i)}$$

It is important to choose the value of C_i as it directly affects low frequency performance of the circuit, for example, when an application requires a flat bass response as low as 100Hz. Equation is reconfigured as follows:

$$C_i = \frac{1}{(2\pi R_i f_c)}$$

As the input resistance is variable, for the C_i value of $0.16\mu\text{F}$, one should actually choose the C_i within the range of $0.1\mu\text{F}$ to $0.22\mu\text{F}$. A further consideration for this capacitor is the leakage path from the input source through the input network (R_i , R_f , C_i) to the load. This leakage current creates a DC offset voltage at the input to the amplifier that reduces useful headroom, especially in high gain application. For this reason, a low leakage tantalum or ceramic

capacitor is the best choice. When a polarized capacitor is used, the positive side of the capacitor should face the amplifier input in most applications as the DC level is held at $VDD/2$, which is likely higher than the source DC level. Please note that it is important to confirm the capacitor polarity in the application.

Power Supply Decoupling (C_s)

The PAM8302A is a high-performance CMOS audio amplifier that requires adequate power supply decoupling to ensure the output THD and PSRR as low as possible. Power supply decoupling affects low frequency response. Optimum decoupling is achieved by using two capacitors of different types that target different types of noise on the power supply leads. For higher frequency transients, spikes, or digital hash on the line, a good low equivalent-series-resistance (ESR) ceramic capacitor, typically $1.0\mu\text{F}$ is good, placing it as close as possible to the device VDD terminal. For filtering lower-frequency noise signals, a capacitor of $10\mu\text{F}$ or

larger, closely located to near the audio power amplifier is recommended.

Shutdown Operation

In order to reduce shutdown power consumption, the PAM8302A contains shutdown circuitry for turn off the amplifier. This shutdown feature turns the amplifier off when a logic low is applied on the \overline{SD} pin. By switching the shutdown pin over to GND, the PAM8302A supply current draw will be minimized in idle mode.

For the best power on/off pop performance, the amplifier should be set in the shutdown mode prior to power on/off operation.

Under Voltage Lock-out (UVLO)

The PAM8302A incorporates circuitry to detect low on or off voltage. When the supply voltage drops to 2.1V or below, the PAM8302A goes into a state of shutdown, and the device comes out of its shutdown state and starts to normal operation by reset the power supply or SD pin.

How to Reduce EMI (Electro Magnetic Interference)

A simple solution is to put an additional capacitor $1000\mu F$ at power supply terminal for power line coupling if the traces from amplifier to speakers are short (<20CM).

Most applications require a ferrite bead filter as shown at Figure 1. The ferrite filter depresses EMI of around 1MHz and higher. When selecting a ferrite bead, choose one with high impedance at high frequencies and low impedance at low frequencies.

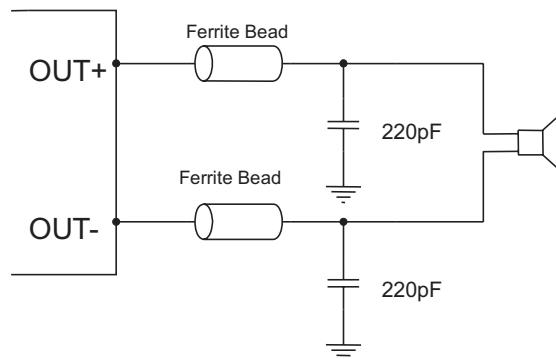


Figure 1: Ferrite Bead Filter to reduce EMI

Ordering Information

www.poweranalog.com

PAM8302A XXXXX




Pin Configuration	Package Type	Number of pins
A: 1: SD 2: NC 3: IN+ 4: IN- 5: VO+ 6: VDD 7: GND 8: VO-	S: MSOP D: SOP Y: DFN3X3	C: 8

Part Number	Package Type	MOQ/Shipping Package
PAM8302AASCR	MSOP-8	2,500 Units/Tape & Reel
PAM8302AADCR	SOP-8	2,500 Units/Tape & Reel
PAM8302AAAYCR	DFN3x3-8	3,000 Units/Tape & Reel

Outline Dimensions


MSOP-8
www.datasheet4u.com

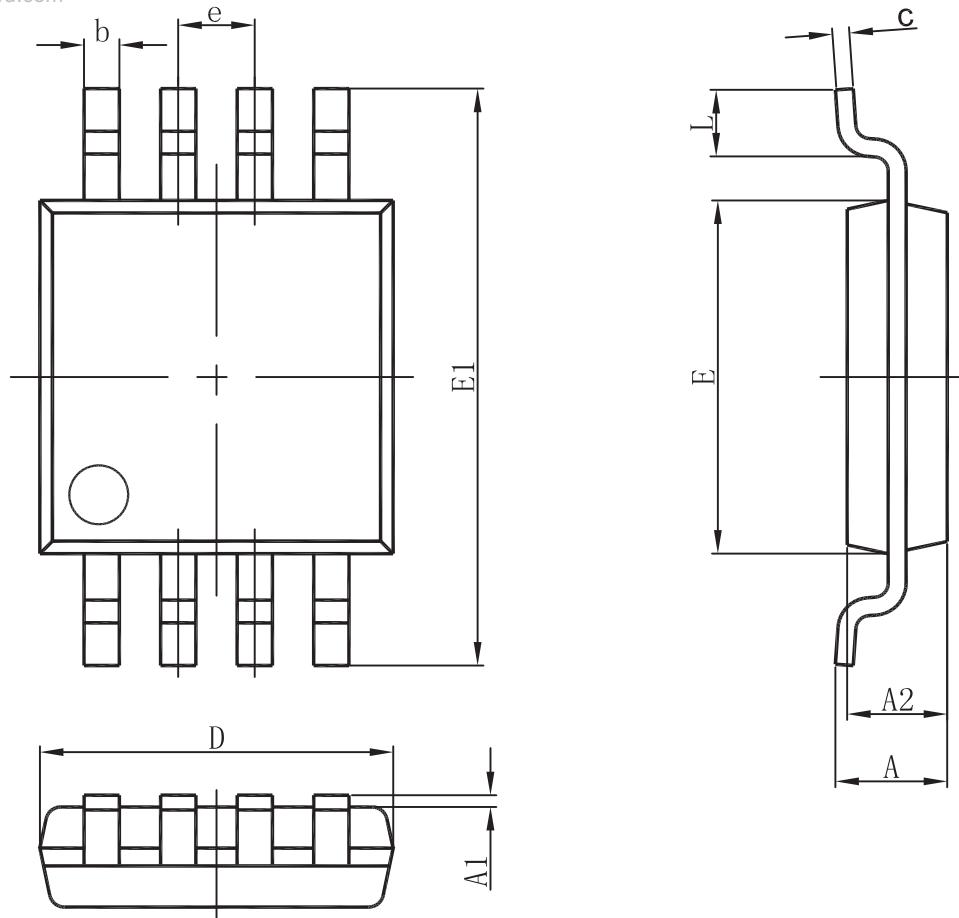

REF	Millimeter	
	Min	Max
A	--	1.10
A1	0.05	0.15
A2	0.78	0.94
b	0.22	0.38
c	0.08	0.23
D	2.90	3.10
E	2.90	3.10
E1	4.75	5.05
e	0.65BSC	
L	0.40	0.70

Outline Dimensions


DFN 3x3
www.datasheet4u.com

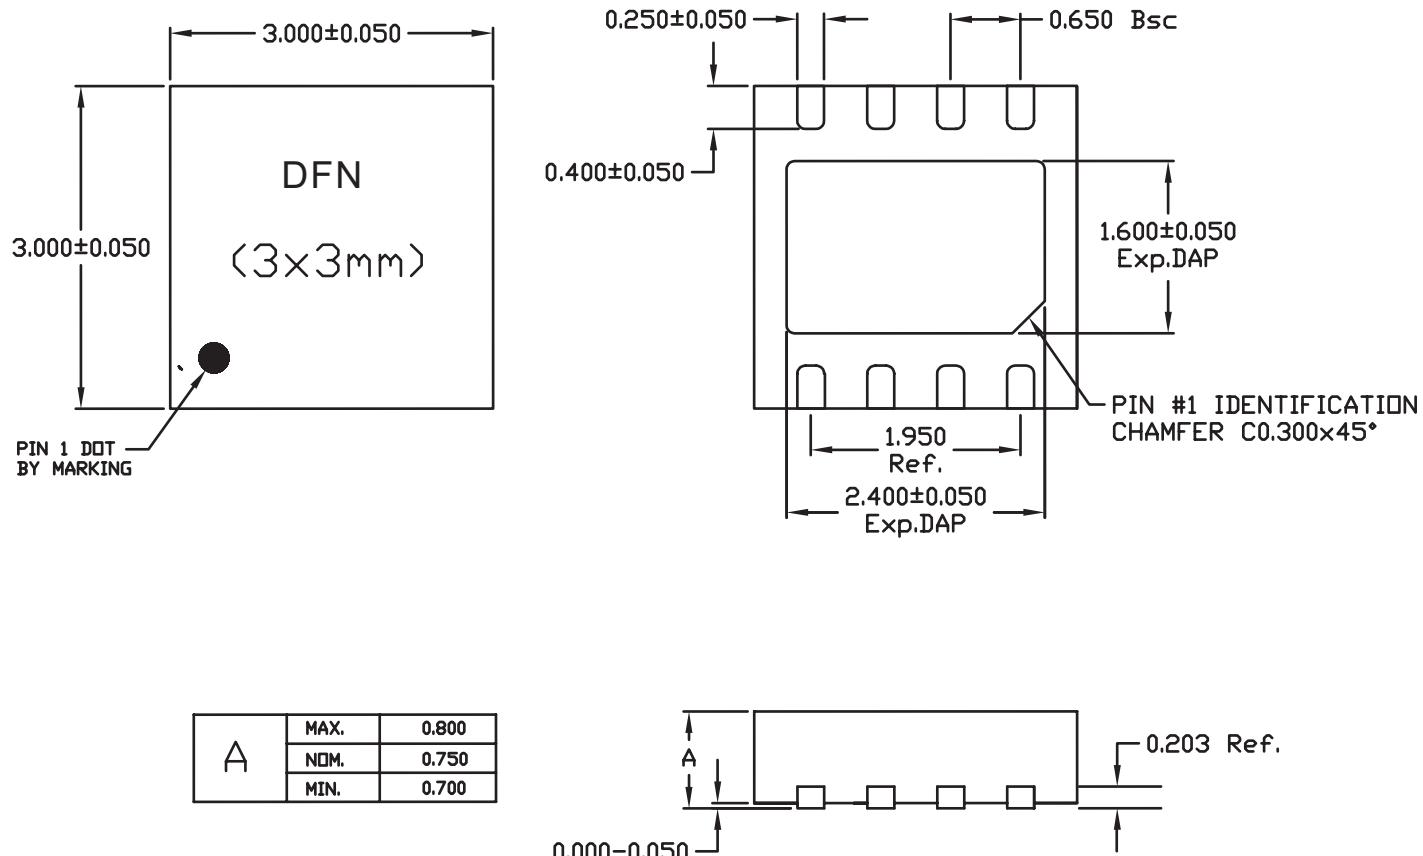

Note: All dimensions are in Millimeters.

Outline Dimensions

SOP-8
www.data

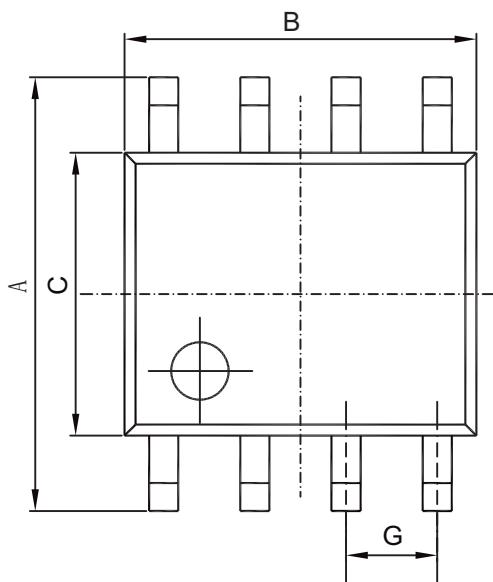

REF	DIMENSIONS	
	Millimeters	
	Min	Max
A	5.80	6.20
B	4.80	5.00
C	3.80	4.00
D	0°	8°
E	0.40	0.90
F	0.19	0.25
M	0.10	0.25
H	0.35	0.49
L	1.35	1.75
J	0.375 REF	
K	45°	
G	1.27 TYP	

