



PCF240W

PCF240D


January 1993

N-Channel MOS Chip

Features

- Passivated
- Contact Metallization
 - Gate and Source - Aluminum
 - Drain - Tri-Metal (Al-Ti-Ni)
- Die Visually Inspected to a 1.0% AQL MII-Std-750, Method 2072
- Harris Packaged Products Manufactured From This Die:
 - IRF640
 - IRFP240
 - IRF240
- PCF240W Die Shipped in Unsawn Probed Wafer Form
- PCF240D Die Shipped in Waffle Pack

Die

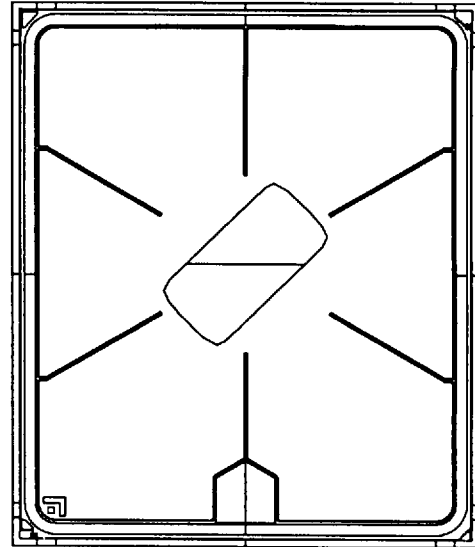

DIE SIZE: 170 x 200 mils

SOURCE ATTACH AREA 30 x 60 mils

GATE ATTACH AREA 23 x 24 mils

BACK SIDE DRAIN

Electrical Characteristics

At +25°C. The Chip is 100% Tested to the Actual Conditions and Limits Specified

CHARACTERISTIC	TEST CONDITIONS	LIMITS		UNITS
		MIN	MAX	
BV_{DSS}	$I_D = 250\mu A, V_{GS} = 0V$	200	-	V
$V_{GS(th)}$	$I_D = 250\mu A, V_{GS} = V_{DS}$	2.0	4.0	V
I_{DSS}	$V_{DS} = 200V$	-	10	μA
I_{GSS}	$V_{GS} = 30V, V_{DS} = 0V$	-	90	nA
$r_{DS(on)}$ (Note 1)	$I_D = 5A, V_{GS} = 10V$	-	180	$M\Omega$
gfs (Note 1)	$V_{DS} = 10V, I_D = 5A$	6.7		mho

NOTE:

1. Pulsed: Pulse Duration = 300 μs Max, Duty Factor = 2%

PCF240W, PCF240D**Recommended Chip Bonding Procedure**

The following tables of Chip Bonding Information list the typical recommended methods for top and bottom chip attachments. However, it is the sole responsibility of the user to

achieve the conditions necessary for proper mounting and bonding due to the wide variation in techniques available.

Chip Bonding Information

DEVICE CLASS	TOP METAL	CONTACT METHOD	BOND	MAX RECOMMENDED WIRE DIAMETER	WIRE MATERIAL
TOP SIDE					
MOSFET Transistor	Al; (40KÅ)	Wire	Stitch	8/15 mils	Al

DEVICE CLASS	BACK METAL	CONTACT METHOD	MATERIAL	MOUNT TEMPERATURE	SCRUB	PREFORM
BOTTOM SIDE						
MOSFET Transistor	Al, Ti, Ni	Soft Solder	PbSn	415°C in H ₂ < 100ppm H ₂ O	Yes	Recommended

Harris Semiconductor products are sold by description only. Harris Semiconductor reserves the right to make changes in circuit design and/or specifications at any time without notice. Accordingly, the reader is cautioned to verify that data sheets are current before placing orders. Information furnished by Harris is believed to be accurate and reliable. However, no responsibility is assumed by Harris or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Harris or its subsidiaries.

Sales Office Headquarters

For general information regarding Harris Semiconductor and its products, call 1-800-4-HARRIS

UNITED STATES

Harris Semiconductor
1301 Woody Burke Road
Melbourne, Florida 32902
TEL: (407) 724-3000

EUROPE

Harris Semiconductor
Mercure Centre
Rue de la Fusee, 100
1130 Brussels, Belgium
TEL: (32) 2-246-2111

SOUTH ASIA

Harris Semiconductor H.K. Ltd.
13/F Fourseas Building
208-212 Nathan Road
Tsimshatsui, Kowloon
Hong Kong
TEL: (852) 723-6339

NORTH ASIA

Harris K.K.
Shinjuku NS Bldg. Box 6153
2-4-1 Nishi-Shinjuku
Shinjuku-Ku, Tokyo 163 Japan
TEL: (81) 3-3345-8911

