



## GENERAL DESCRIPTION

Tethys™ II PEB2757AE is optimized for SONET/SDH applications as a full-duplex four channel (SFI4.2) or two channel (SFI4.1) STS-192/STM64 or mix of sixteen MUX/DEMUX channels of STS-48/STM-16 or STS-12/STM-4 or STS-3/STM-1 (in groups of four channels). The device has full framer functionality including pointer processing, and overhead termination; ideal for aggregation, ADM and DWDM applications. In the demultiplex ingress direction, Tethys™ II PEB2757AE accepts either two STS-192/STM-64 or sixteen STS-48/STM-16, or a mix of sixteen STS-12/STM-4 and STS-3/STM-1 signals in serial 2.5 Gbit/s or serial 622 Mbit/s or serial 155 Mbit/s format. Tethys™ II PEB2757AE locates the incoming SONET/SDH frame, optionally descrambles the data, monitors the TOH and POH, and provides STS-1 level pointer processing. In addition, Tethys™ II PEB2757AE supports TOH and POH overhead transparency.

In the multiplex direction, Tethys™ II PEB2757AE accepts sixteen STS-48/STM-16 signals in serial 2.5 Gbit/s format. Tethys™ II PEB2757AE further provides corresponding functionality in the DEMUX direction.

## APPLICATIONS

- ADM
- Metro Aggregation
- Digital Cross Connects
- Repeaters
- DWDM Equipment
- Test Equipment

## FEATURES

- Provides 4 SFI4.2 interfaces for STS-192/STM-64 links
- Provides 2 SFI4.1 interfaces for STS-192/STM-64 links
- Provides serial STS-48/STM-16, STS-12/STM-4 or STS-3/STM-1 links, operating at the same time when configurable in groups of 4 links.
- Differential CML 2.5 Gbit/s I/O interface to optics
- Differential CML 2.5 Gbit/s I/O interface to system/backplane
- TFI-5 Support

- Processes SONET/SDH sixteen STS-48/STM-16 or a mix of sixteen STS-12/STM-4 and STS-3/STM-1 on the line side interface
- Processes SONET/SDH sixteen STS-48/STM-16 on the system/client side serial 2.5 Gbit/s interface
- Provides line timing of all line and system side interfaces
- Processes SONET/SDH flexible concatenation streams of STS-2c, 3c, 4c, ... to 192c
- Supports auto-detection of concatenation streams STS-3c/STM-1, STS-12c/STM-4 and STS-48c/STM-16
- Supports STS-1 level pointer processing of STS-48/STM-16 or STM-12/STM-4 or STS-3/STM-1 streams
- Provides interfaces for dropping alarm and status information, and for forcing alarm conditions
- Power dissipation of up to 23 W, depending on mode of operation
- Terminates and generates SONET section, line, and path layers
- Provides TOH and POH transparency
- Provides monitoring of POH bytes B3 and N1/Z5
- Provides B2 SF/SD capability for Poisson and bursty error distribution
- Provides full TOH/POH add/drop
- Provides STS-1 level POH add/drop
- Supports more than  $\pm 746$  UI programmable output skew on STS48/STM-16 system side output links to external cross-connects
- For diagnostic purposes, Tethys provides PRBS generator/checker and loop backs
- Provides B1, B2, H1 and H2 bit error generation for both receive and transmit direction diagnostics
- Provides 1 second performance monitors
- 0.13 micron process, 1.2 V core, 3.3 V I/O
- Motorola 32-bit synchronous microprocessor interface for configuration, control, and status monitoring
- Complies with GR-253, GR-1377, ITU-T G.707, and ANSI T1.105
- Provides a standard 5-signal IEEE 1149.1 JTAG test port for boundary scan board test purposes

## SPECIFICATIONS

- OIF TFI-5, SFI4.1, SFI 4.2, GR-253-CORE

## ORDERING INFORMATION

PART NUMBER	PACKAGE	OPERATING TEMPERATURE RANGE
PEB2757AE	1397 CBGA	-40°C to +85°C

FIGURE 1. PEB2757AE BLOCK DIAGRAM IN 16 x OC48/12/3 APPLICATION

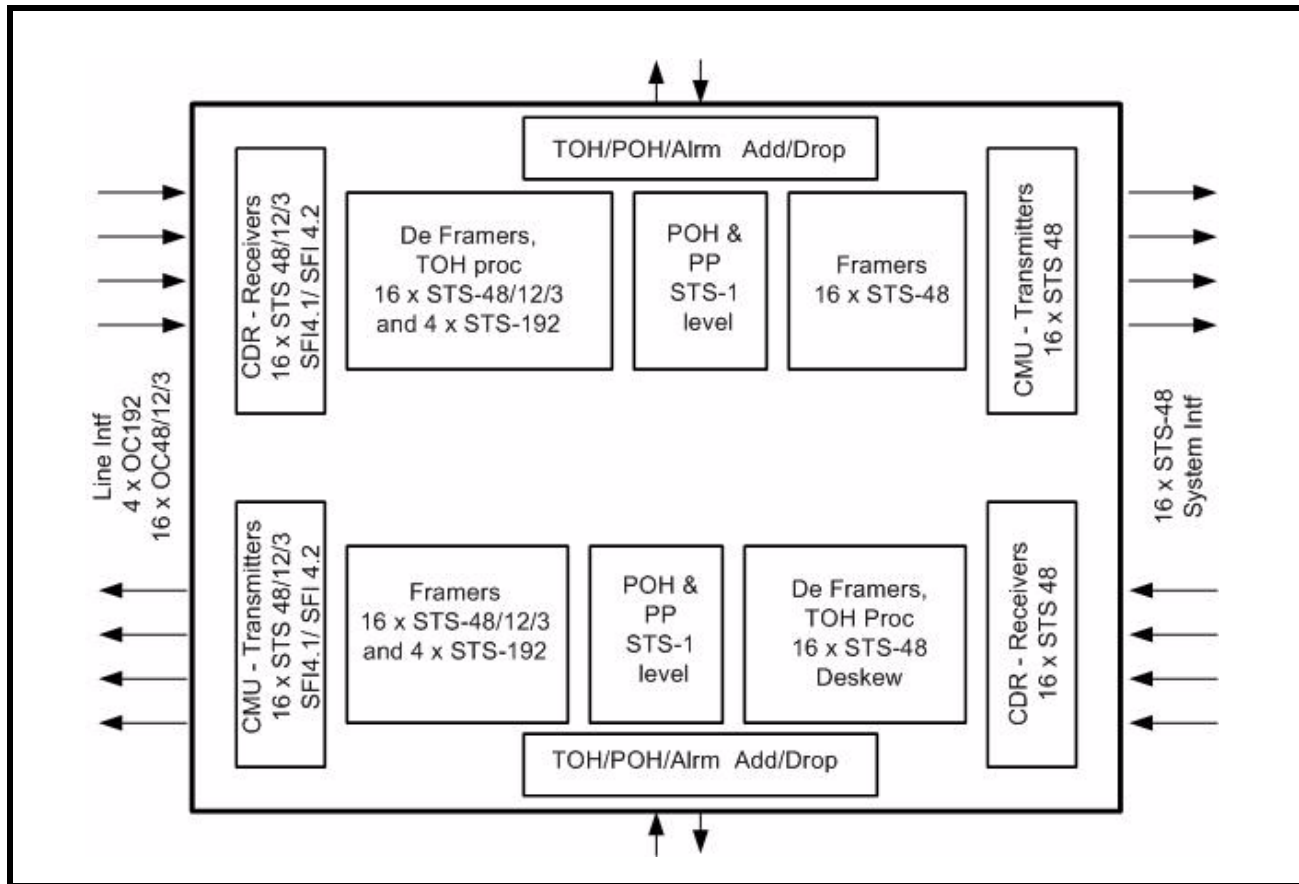


FIGURE 2. PEB2757AE IN 16 x OC48/12/3 APPLICATION

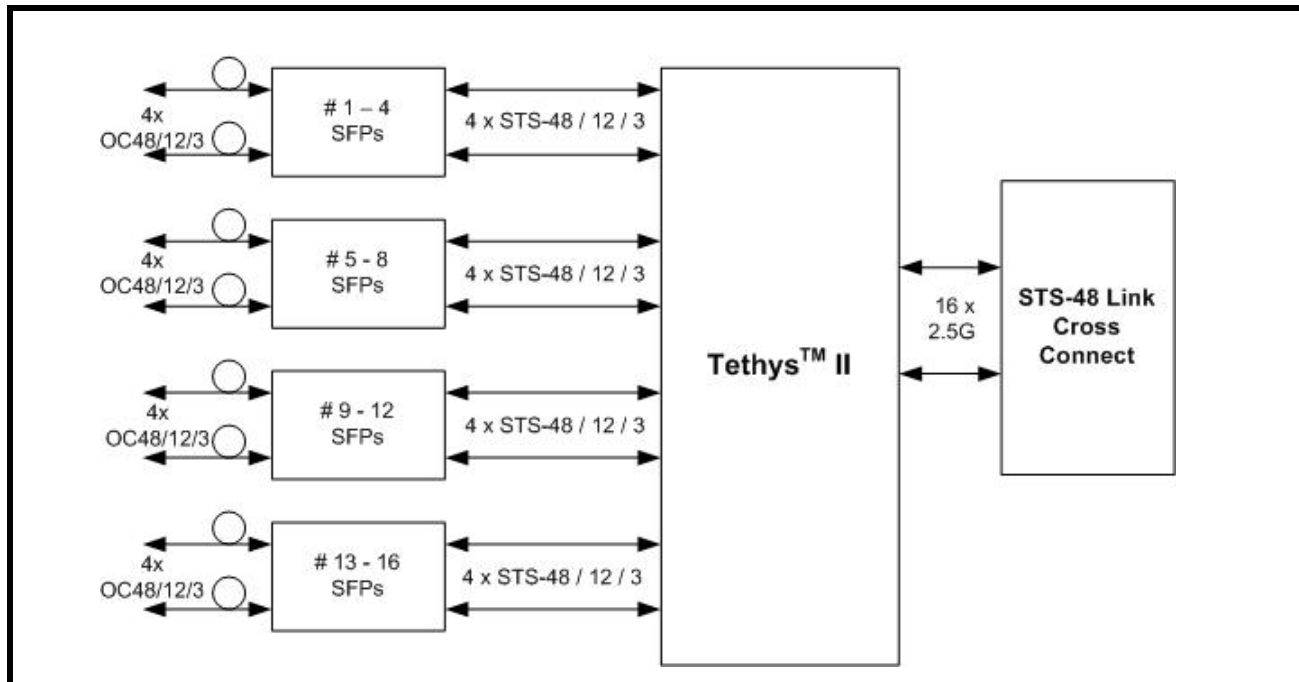


FIGURE 3. PEB2757AE IN DUAL 10G APPLICATION

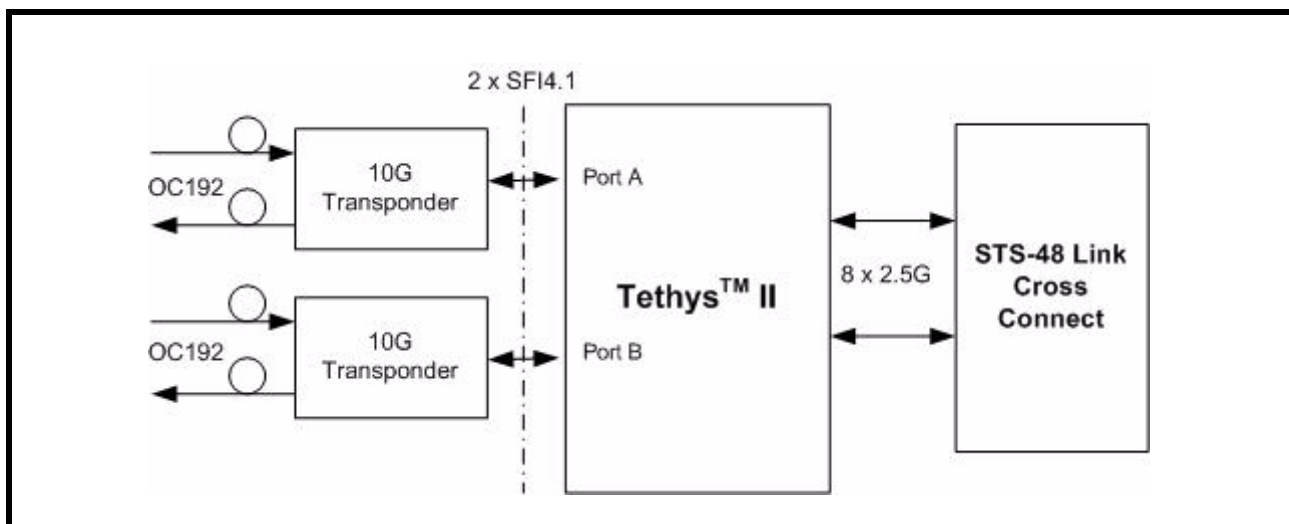


FIGURE 4. PEB2757AE IN QUAD 10G APPLICATION

