


1200V, 15A, Trench NPT IGBT

Features

- Trench NPT(Non Punch Through) IGBT
- High speed switching
- Low saturation voltage: $V_{CE(sat)}=2.0V@I_C=15A$
- High input impedance




Applications

- Inductive heating, Microwave oven, Inverter, UPS, etc.
- Soft switching applications

General Description

Using advanced Trench NPT technology, WOS's 1200V IGBTs offers superior conduction and switching performances, and easy parallel operation with exceptional avalanche ruggedness. This device is designed for soft switching applications.



Absolute Maximum Ratings

Symbol	Description	Ratings	Units
V_{CES}	Collector to Emitter Voltage	1200	V
V_{GES}	Gate to Emitter Voltage	+/-30	V
I_C	Continuous Collector Current @ $T_C=25^{\circ}C$	30	A
	Continuous Collector Current @ $T_C=100^{\circ}C$	15	A
$I_{CM}(1)$	Pulsed Collector Current	45	A
I_F	Diode Continuous Forward Current @ $T_C=100^{\circ}C$	15	
I_{FM}	Diode Maximum Forward Current	90	A
P_D	Maximum Power Dissipation @ $T_C=25^{\circ}C$	220	W
	Maximum Power Dissipation @ $T_C=100^{\circ}C$	88	W
T_J	Operating Junction Temperature	-55 to +150	$^{\circ}C$
T_{stg}	Storage Temperature Range	-55 to +150	$^{\circ}C$
T_L	Maximum Lead Temp. for soldering Purposes, 1/8" from case for 5seconds	300	$^{\circ}C$

Notes:

1. Repetitive rating, Pulse width limited by max. junction temperature

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Units
$R_{\square JC}$	Thermal Resistance, Junction to Case	-	0.57	°C/W
R_{JA}	Thermal Resistance, Junction to Ambient	-	40	°C/W

Electrical Characteristics of the IGBT $T_C=25^\circ\text{C}$

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
Off Characteristics						
BV _{CES}	Collector to Emitter Breakdown Voltage	V _{GE} =0V, I _c =1mA	1200	-	-	V
I _{CES}	Collector Cut-Off Current	V _{CE} = V _{CES} , V _{GE} =0V	-	-	1	mA
I _{GES}	G-E Leakage Current	V _{GE} = V _{GES} , V _{CE} =0V	-	-	+/-250	nA
On Characteristics						
V _{GE(th)}	G-E Threshold Voltage	I _C =15mA, V _{CE} =V _{GE}	4.0	5.5	7.0	V
V _{CE(sat)}	Collector to Emitter Saturation Voltage	I _C =15A, V _{GE} =15V T _C =25°C	-	2	2.5	V
		I _C =15A, V _{GE} =15V T _C =125°C	-	2.15	-	V
Dynamic Characteristics						
C _{ies}	Input Capacitance	V _{CE} =30V, V _{GE} =0V, f=1MHz	-	2350	-	pF
C _{oes}	Output Capacitance		-	70	-	pF
C _{res}	Reverse Transfer Capacitance		-	45	-	pF
Switching Characteristics						
t _{d(on)}	Turn-On Delay Time	V _{CC} =600V, I _C =15A, R _G =10Ω, V _{GE} =15V, Resistive Load, T _C =25°C	-	33	-	ns
t _r	Rise Time		-	80	-	ns
t _{d(off)}	Turn-Off Delay Time		-	160	-	ns
t _f	Fall Time		-	255	330	ns
E _{on}	Turn-On Switching Loss		-	0.3	-	mJ
E _{off}	Turn-Off Switching Loss		-	0.58	0.74	mJ
E _{ts}	Total Switching Loss		-	0.88	-	mJ
t _{d(on)}	Turn-On Delay Time	V _{CC} =600V, I _C =15A, R _G =10Ω, V _{GE} =15V, Resistive Load, T _C =125°C	-	30	-	ns
t _r	Rise Time		-	115	-	ns
t _{d(off)}	Turn-Off Delay Time		-	170	-	ns
t _f	Fall Time		-	390	-	ns
E _{on}	Turn-On Switching Loss		-	0.38	-	mJ
E _{off}	Turn-Off Switching Loss		-	0.89	-	mJ
E _{ts}	Total Switching Loss		-	1.27	-	mJ
Q _g	Total Gate Charge	V _{CC} =600V, I _C =15A, V _{GE} =15V	-	100	-	nC
Q _{ge}	Gate to Emitter Charge		-	19	-	nC
Q _{gc}	Gate to Collector Charge		-	45	-	nC

Electrical Characteristics of Diode $T_C=25^{\circ}\text{C}$

Symbol	Parameter	Test Conditions		Min.	Typ.	Max.	Units	
V _{FM}	Diode Forward Voltage	I _F =15A	25°C		1.4	1.8	V	
			125°C		1.42		V	
t _{rr}	Diode Reverse Recovery Time	I _F =15A, dI/dt=200A/us	25°C		575		ns	
			125°C		577		ns	
I _{rr}	Diode Peak Reverse Recovery Current		25°C		30		A	
			125°C		37		A	
Q _{rr}	Diode Reverse Recovery Charge		25°C		8.7		uC	
			125°C		10.7		uC	

Typical Performance Characteristics

Figure 1. Typical Output Characteristics

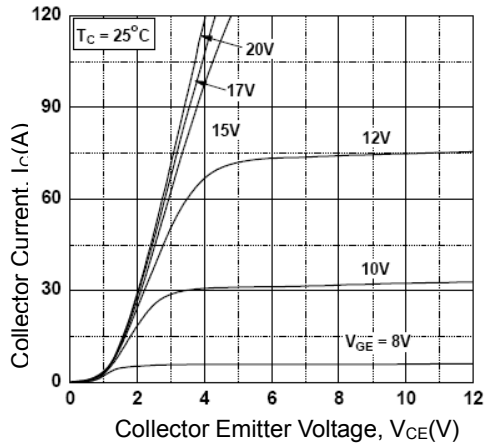


Figure 2. Typical Saturation Voltage Characteristics

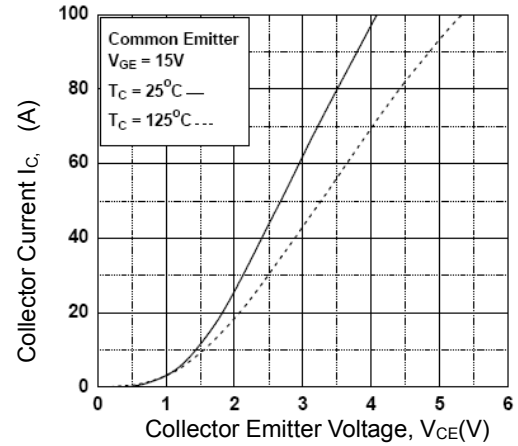


Figure 3. Saturation Voltage vs. Case Temperature at Variant Current Level

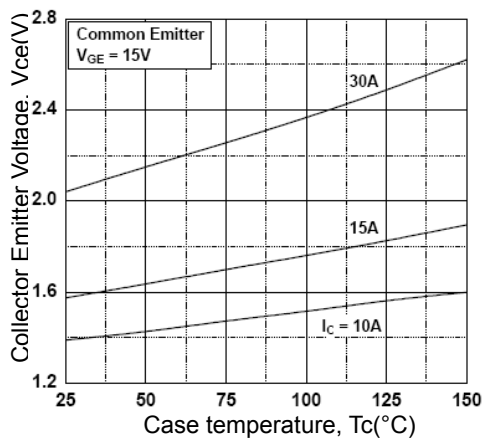


Figure 4. Saturation Voltage vs. V_GE

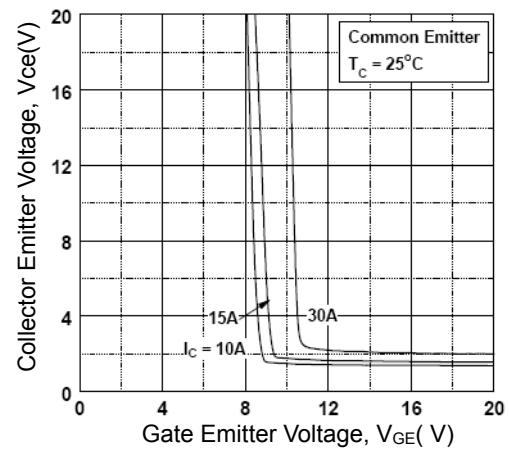


Figure 5. Saturation Voltage vs. V_GE


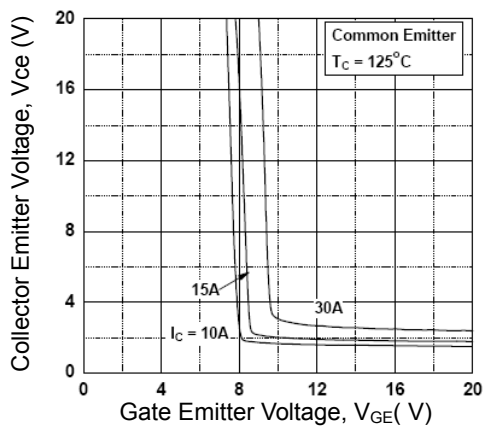


Figure 6. Capacitance Characteristics

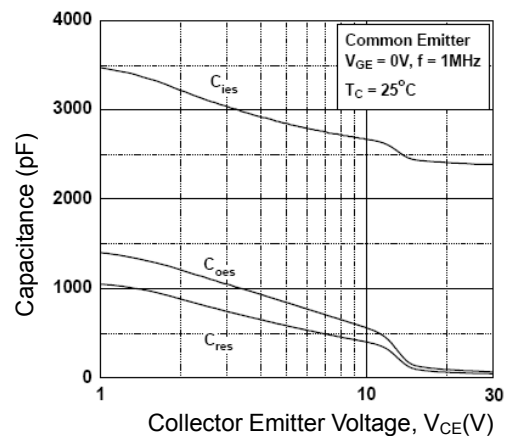

Typical Performance Characteristics (Continued)

Figure 7. Turn-on Characteristics vs. Gate Resistance

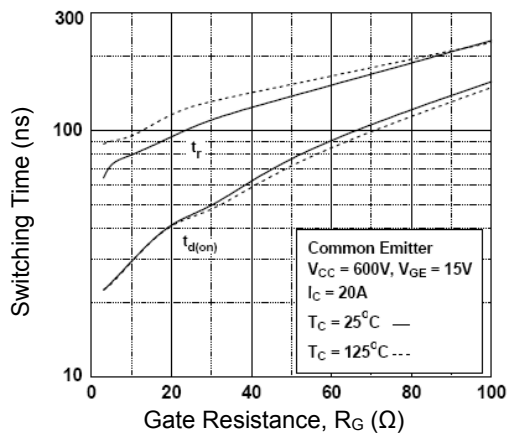


Figure 8. Turn-off Characteristics vs. Gate Resistance

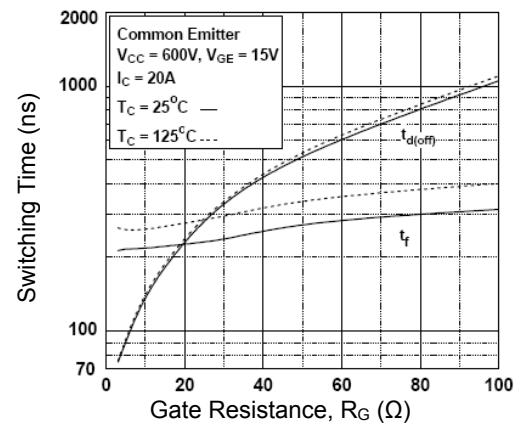


Figure 9. Switching Loss vs. Gate Resistance

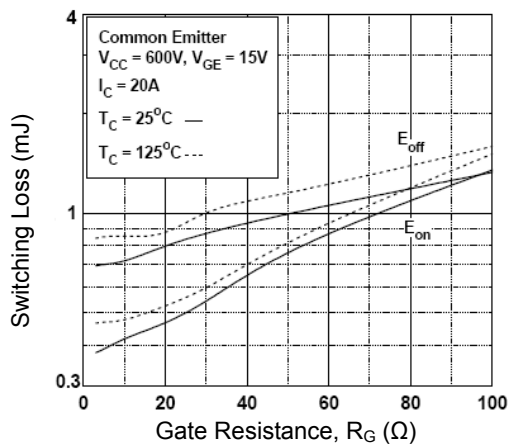


Figure 10. Turn-on Characteristics vs. Collector Current

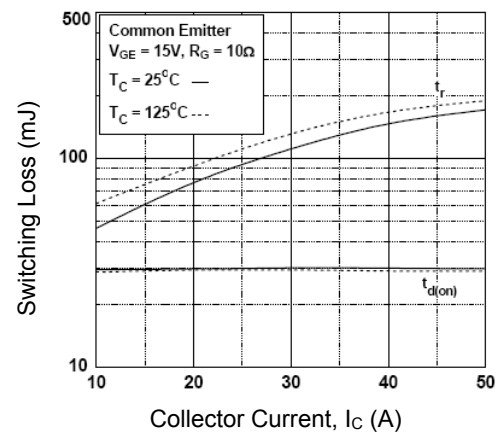


Figure 11. Turn-Off Characteristics vs. Collector Current


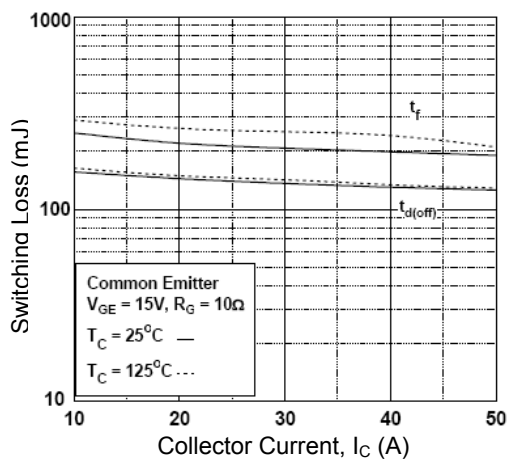


Figure 12. Switching Loss vs. Collector Current

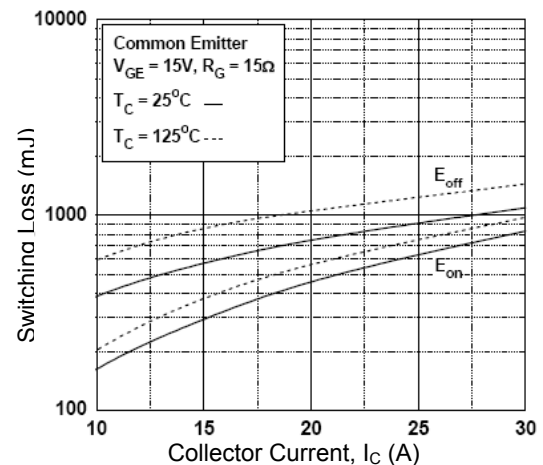

Typical Performance Characteristics (Continued)

Figure 13. Gate Charge Characteristics

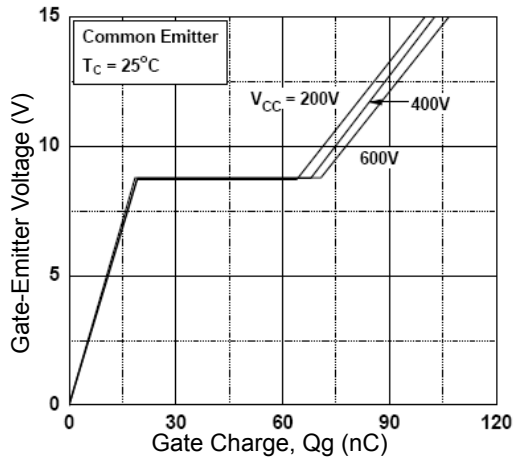


Figure 14. SOA Characteristics

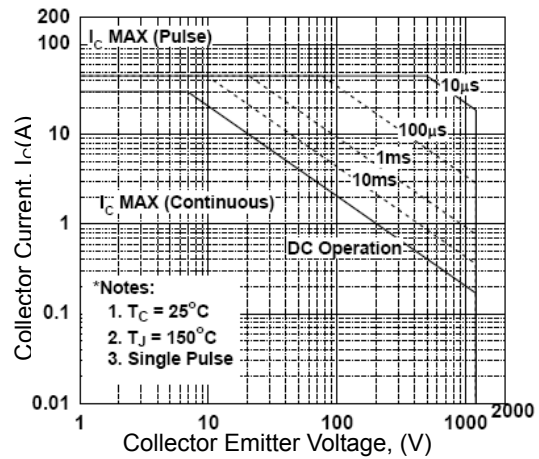


Figure 15. Turn-Off SOA

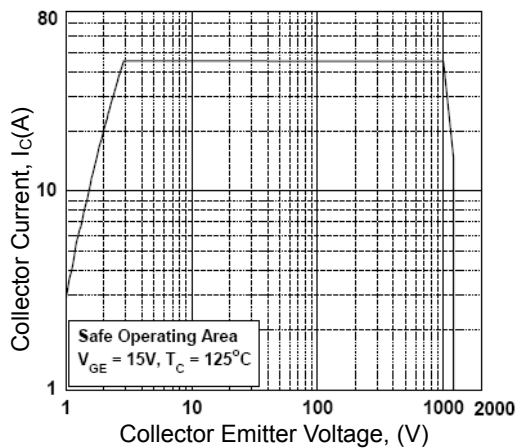


Figure 16. Transient Thermal Impedance of IGBT

