

GENERAL
INSTRUMENT

PIC1657

PRELIMINARY INFORMATION

8 BIT MICROCOMPUTER

FEATURES

- 32 8-bit RAM registers
- 512 x 12-bit program ROM
- Arithmetic Logic Unit
- Real Time Clock/Counter
- Self contained oscillator for crystal or ceramic resonator
- Available in three temperature ranges: 0°C to 70°C, -40° to 85°C and -40°C to 110°C
- 28 pin package
- 2 level stack for subroutine nesting
- Open drain option on all I/O lines
- 20 bi-directional I/O lines
- 2 usec instruction execution time
- Mask programmable prescaler for RTCC


DESCRIPTION

The PIC1657 microcomputer is an MOS/LSI device containing RAM, I/O and a central processing

unit as well as customer-defined ROM on a single chip. This combination produces a low cost solution for applications which require sensing individual inputs and controlling individual outputs. Keyboard scanning, display driving, and other system control functions can be done at the same time due to the powerful 8-bit CPU.

The internal ROM contains a customer-defined program using the PIC's powerful instruction set to specify the overall functional characteristics of the device. The 8-bit input/output registers provide latched lines for interfacing to a limitless variety of applications. The PIC can be used to scan keyboards, drive displays, control electronic games and provide enhanced capabilities to power tools, telecommunication systems, radios, television, consumer appliances, industrial timing and control applications. The 12-bit instruction word format provides a powerful yet easy to use instruction repertoire emphasizing single bit

PIC 1657 BLOCK DIAGRAM

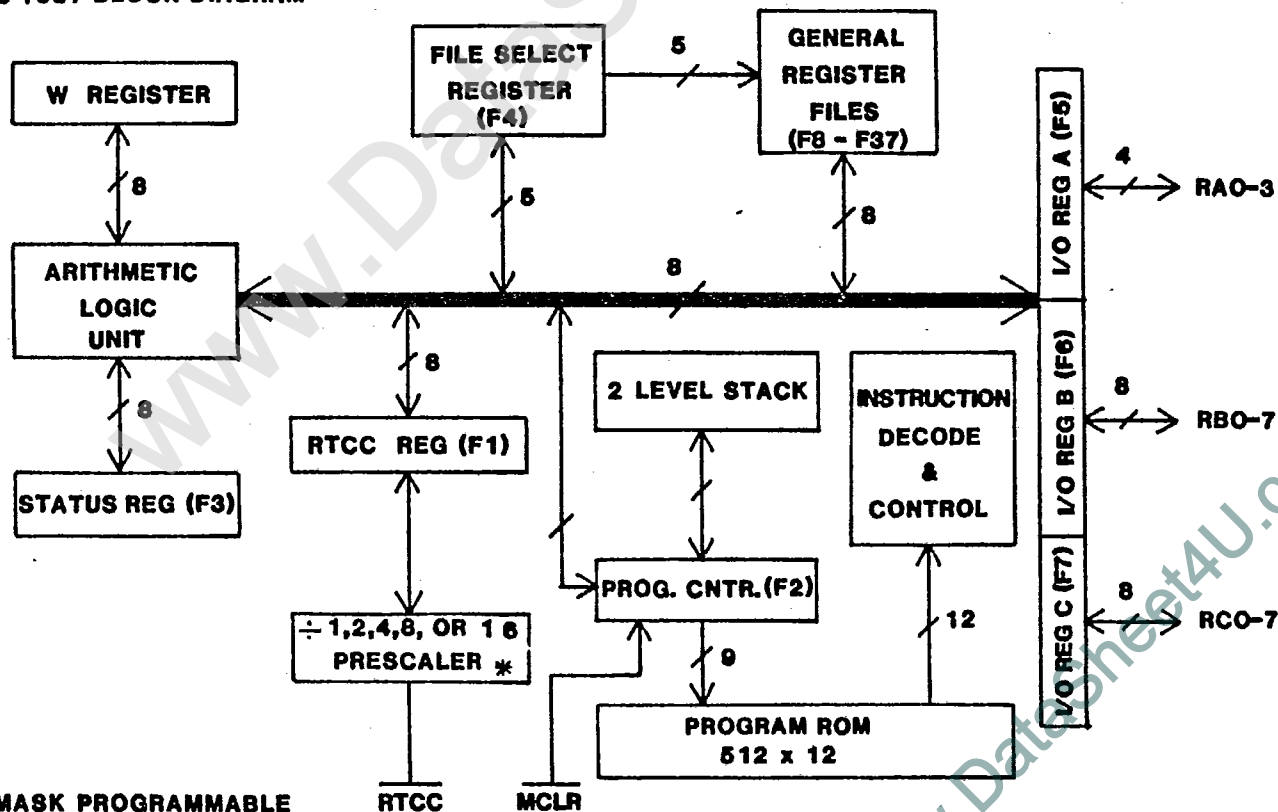

GENERAL
INSTRUMENT

PIC1657

manipulation as well as logical and arithmetic operations using bytes.

The PIC1657 is fabricated with N-Channel Silicon Gate technology resulting in a high performance product with proven reliability and production history. Only a single wide range power supply is required for operation, and an on-chip oscillator provides the operating clock with an external crystal or ceramic resonator to establish the frequency. Inputs and outputs are TTL-compatible.

Extensive hardware and software support is available to aid the user in developing an application program and to verify performance before committing to mask tooling. Programs can be assembled into machine language using PICAL, a powerful macro-assembler. PICAL is available in various versions that can be run on many popular computer systems. Once the application program is developed several options are available to insure proper performance. The PIC's operation can be verified in any hardware application by using the PIC1664-1. The PIC1664-1 is a ROM-less PIC microcomputer with additional pins to connect external PROM or RAM and to accept HALT commands. The PFD1000XT Field Demo System is available containing a PIC1664-1 with sockets for erasable CMOS PROMs. Finally, the PICES II (PIC In-Circuit Emulation System) provides the user with emulation and debugging capability in either a stand-alone mode or operation as a peripheral to a larger computer system. Easy program debugging and changing is facilitated because the user's program is stored in RAM. With these development tools, the user can quickly and confidently order the masking of the PIC's ROM and bring his application into the market.

A PIC Series Microcomputer Data Manual is available which gives additional detailed data on PIC based system design.

ARCHITECTURAL DESCRIPTION

The firmware architecture of the PIC series microcomputer is based on a register file concept with simple yet powerful commands designed to emphasize bit, byte and register transfer operations. The instruction set also supports computing functions as well as these control and interface functions.

Internally, the PIC is composed of three functional elements connected together by a single bidirectional bus; the Register File composed of 32 addressable 8-bit registers, an Arithmetic Logic Unit, and a user-defined Program ROM composed of 512 words each 12 bits in width. The Register File is divided into two functional groups: operational registers and general registers. The operational registers include, among others, the Real Time Clock Counter Register, the Program Counter (PC), the Status Register, and the I/O Registers. The general purpose registers are used for data and control information under command of the instructions. The Arithmetic Logic Unit contains one temporary working register or accumulator (W Register) and gating to perform Boolean functions between data held in the working register and any file register.

The Program ROM contains the operational program for the rest of the logic within the controller. Sequencing of microinstructions is controlled via the Program Counter (PC) which automatically increments to execute in-line programs. Program control operations can be performed by Bit Test and Skip instructions, Jump instructions, Call instructions, or by loading computed addresses into the PC. In addition, an on-chip two-level stack is employed to provide easy to use subroutine nesting. Activating the MCLR input on power up initializes the ROM program to address 777_h.

GENERAL
INSTRUMENT

PIC1657

PIN FUNCTIONS

OSC1 (Input), OSC2 (Output)

These pins are the time base inputs to which a crystal, ceramic resonator, or external single phase clock may be connected. The frequency of oscillation is 8 times the instruction cycle frequency.

 $\overline{\text{RTCC}}$ (Input)

Real Time Clock Counter. Used by the microprogram to keep track of elapsed time between events. The Real Time Clock Counter Register increments on falling edges applied to this pin. This register (F1) can be loaded and read by the program. This is a Schmitt trigger input except when a prescaler division ratio of 2, 4, 8 or 16 is selected, in which case the input is TTL compatible. A mask option will allow an internal clock signal whose period is equal to the instruction execution time to drive the real time clock counter register. In this mode, transitions in the $\overline{\text{RTCC}}$ pin will be disregarded.

TEST

Used for testing purposes only. Must be grounded for normal operation.

RA0-3 (Input/Output)

4 user programmable I/O lines (F5). The four MSB's are always read as logic 0's!

RB0-7 (Input/Output)

8 user programmable I/O lines (F6).

RC0-7 (Input/Output)

8 user programmable I/O lines (F7).

All inputs and outputs are under direct control of the program. A mask option will allow any I/O pin at the time of ROM pattern definition to be open drain.

 $\overline{\text{MCLR}}$ Input

Master Clear. Used to initialize the internal ROM program to address 777_8 and latch all I/O registers high. Should be held low 10-75ms past the time when $V_{DD} \geq 4.5V$, depending on the crystal or ceramic resonator start up time.

 V_{DD}

Power supply.

 V_{XX}


Output buffer power supply. Used to enhance output current sinking capability.

 V_{SS}

Ground.

PIN CONFIGURATION

28 Lead Dual In Line

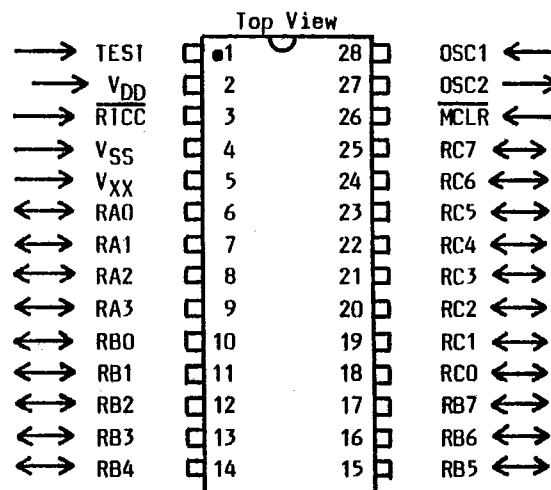

PIC1657

GENERAL
INSTRUMENT

REGISTER FILE ARRANGEMENT

File (Octal)	Function								
F0	Not a physically implemented register. F0 calls for the contents of the File Select Register (low order 5 bits) to be used to select a file register. F0 is thus useful as an indirect address pointer. For example, W+FO-W will add the contents of the file register pointed to by the FSR (F4) to W and place the result in W.								
F1	Real Time Clock Counter Register. This register can be loaded and read by the microprogram. The RTCC register keeps counting up after zero is reached. The counter increments on the falling edge of the input RTCC. However, if data is being stored in the RTCC register simultaneously with a negative transition on the RTCC pin, the RTCC register will contain the new stored value and the external transition will be ignored by the microcomputer.								
F2	Program Counter (PC). The PC is automatically incremented during each instruction cycle, and can be written into under program control (MOVWF F2). The PC is nine bits wide, but only its low order 8 bits can be read under program control.								
F3	Status Word Register. F3 can be altered under program control only via bit set, bit clear, or MOVWF F3 instruction. (7) (6) (5) (4) (3) (2) (1) (0) <table><tr><td>1</td><td>1</td><td>1</td><td>1</td><td>1</td><td>Z</td><td>DC</td><td>C</td></tr></table> C (Carry): For ADD and SUB instructions, this bit is set if there is a carry out from the most significant bit of the resultant. For ROTATE instructions, this bit is loaded with either the high or low order bit of the source. DC (Digit Carry): For ADD and SUB instructions, this bit is set if there is a carry out from the 4th low order bit of the resultant. Z (Zero): Set if the result of an arithmetic operation is zero. Bits: 3-7 These bits are defined as logic ones.	1	1	1	1	1	Z	DC	C
1	1	1	1	1	Z	DC	C		
F4	File Select Register (FSR). Low order 5 bits only are used. The FSR is used in generating effective file register addresses under program control. When accessed as a directly addressed file, the upper 3 bits are read as ones.								
F5	I/O Register A (A0-A3) (A4-A7 defined as zeros).								
F6	I/O Register B (B0-B7)								
F7	I/O Register C (C0-C7)								
F10-F37	General Purpose Registers								

GENERAL
INSTRUMENT

PIC1657

BASIC INSTRUCTION SET SUMMARY

Each PIC instruction is a 12-bit word divided into an OP code which specifies the instruction type and one or more operands which further specify the operation of the instruction. The following PIC instruction summary lists byte-oriented, bit-oriented and literal and control operations.

For byte-oriented instructions, "f" represents a file register designator and "d" represents a destination designator. The file register designator specifies which one of the 32 PIC file registers is to be utilized by the instruction. The destination designator specifies where the result of the operation performed by the instruction is to be placed. If "d" is zero, the result is placed in the PIC W register. If "d" is one,

the result is returned to the file register specified in the instruction.

For bit-oriented instructions, "b" represents a bit field designator which selects the number of the bit affected by the operation while "f" represents the number of the file in which the bit is located.

For literal and control operations, "k" represents an eight or nine bit constant or literal value.

For an oscillator frequency of 4MHz the instruction execution time is 2 usec unless a conditional test is true or the program counter is changed as a result of an instruction. In these two cases, the instruction execution time is 4 usec.

BYTE-ORIENTED FILE
REGISTER OPERATIONS

(11-6)	(5)	(4-0)
OP CODE	d	f (FILE #)

For d = 0, f W (PIC16C accepts d = 0 or d = W in the mnemonic)
d = 1, f f (if d is omitted, assembler assigns d = 1)

Instruction-Binary (Octal)	Name	Mnemonic, Operands	Operation	Status Affected
000 000 000 000 (0000)	No Operation	NOP - -		None
000 000 1ff fff (0040)	Move W to f (Note 1)	MOVWF f W→f		None
000 001 000 000 (0100)	Clear W	CLRW - 0→W		Z
000 001 1ff fff (0140)	Clear f	CLRF f 0→f		Z
000 010 dff fff (0200)	Subtract W from f	SUBWF f,d f-W→d (f+W+1→d)		C,DC,Z
000 011 dff fff (0300)	Decrement f	DECF f,d f-1→d		Z
000 100 dff fff (0400)	Inclusive OR W and f	IORWF f,d Wf→d		Z
000 101 dff fff (0500)	AND W and f	ANDWF f,d W.f→d		Z
000 110 dff fff (0600)	Exclusive OR W and f	XORWF f,d W+f→d		Z
000 111 dff fff (0700)	Add W and f	ADDWF f,d W+f→d		C,DC,Z
001 000 dff fff (1000)	Move f	MOVF f,d f→d		Z
001 001 dff fff (1100)	Complement f	COMF f,d f→d		Z
001 010 dff fff (1200)	Increment f	INCF f,d f+1→d		Z
001 011 dff fff (1300)	Decrement f, Skip if Zero	DECFSZ f,d f-1→d, skip if Zero		None
001 100 dff fff (1400)	Rotate Right f	RRF f,d f(n)→d(n-1), f(0)→C, C→d(7)		C
001 101 dff fff (1500)	Rotate Left f	RLF f,d f(n)-d(n+1), f(7)-C, C-d(0)		C
001 110 dff fff (1600)	Swap halves f	SWAPF f,d f(0-3) f(4-7)→d		None
001 111 dff fff (1700)	Increment f, Skip if Zero	INCFSZ f,d f+1→d, skip if zero		None

BIT-ORIENTED FILE
REGISTER OPERATIONS

(11-8)	(7-5)	(4-0)
OP CODE	b(BIT#)	f (FILE #)

Instruction-Binary (Octal)	Name	Mnemonic, Operands	Operation	Status Affected
010 0bb bff fff (2000)	Bit Clear f	BCF f,b 0- f(b)		None
010 1bb bff fff (2400)	Bit Set f	BSF f,b 1- f(b)		None
011 0bb bff fff (3000)	Bit Test f, Skip if Clear	BTFSZ f,b Bit Test f(b): skip if clear		None
011 1bb bff fff (3400)	Bit Test f, Skip if Set	BTFSZ f,b Bit Test f(b): skip if set		None

LITERAL AND CONTROL
OPERATIONS

(11-8)	(7-0)
OP CODE	k (LITERAL)

Instruction-Binary (Octal)	Name	Mnemonic, Operands	Operation	Status Affected
100 0kk kkk kkk (4000)	Return & place Literal in W	RETLW k k-W, Stack-PC		None
100 1kk kkk kkk (4400)	Call subroutine (Note 1)	CALL k PC+1- Stack, K- PC		None
101 kkk kkk kkk (5000)	Go to address (k is 9 bits)	GOTO k k- PC		None
110 0kk kkk kkk (6000)	Move Literal to W	MOVLW k k- W		None
110 1kk kkk kkk (6400)	Inclusive OR Literal and W	IORLW k kVW- W		Z
111 0kk kkk kkk (7000)	AND Literal and W	ANDLW k k.W- W		Z
111 1kk kkk kkk (7400)	Exclusive OR Literal and W	XORLW k k⊕W- W		Z

Notes:

- The 9th bit of the program counter in the PIC is zero for a CALL and a MOVWF F2. Therefore, subroutines must be located in program memory locations 0-377g. However, subroutines can be called from anywhere in the program memory since the Stack is 9 bits wide.
- When an I/O register is modified as a function of itself, the value used will be that value present on the output pins. For example, an output pin which has been latched high but is driven low by an external device, will be related in the low state.

GENERAL
INSTRUMENT

PIC1657

SUPPLEMENTAL INSTRUCTION SET SUMMARY

The following supplemental instructions summarized below represent specific applications of the basic PIC instructions. For example, the "CLEAR CARRY" supplemental instruction is equivalent

to the basic instruction BCF 3,0 ("Bit Clear, File 3, Bit 0"). These instruction mnemonics are recognized by the PIC Cross Assembler (PICAL).

Instruction-Binary (Octal)	Name	Mnemonic Operands	Equivalent Operation(s)	Status Affected
010 000 000 011 (2003)	Clear Carry	CLRC	BCF 3,0	-
010 100 000 011 (2403)	Set Carry	SETC	BSF 3,0	-
010 000 100 011 (2043)	Clear Digit Carry	CLRDC	BCF 3,1	-
010 100 100 011 (2443)	Set Digit Carry	SETDC	BSF 3,1	-
010 001 000 011 (2103)	Clear Zero	CLRZ	BCF 3,2	-
010 101 000 011 (2503)	Set Zero	SETZ	BSF 3,2	-
011 100 000 011 (3403)	Skip on Carry	SKPC	BTFS 3,0	-
011 000 000 011 (3003)	Skip on No Carry	SKPNC	BTFS 3,0	-
011 100 100 011 (3443)	Skip on Digit Carry	SKPDC	BTFS 3,1	-
011 000 100 011 (3043)	Skip on No Digit Carry	SKPND	BTFS 3,1	-
011 101 000 011 (3503)	Skip on Zero	SKPZ	BTFS 3,2	-
011 001 000 011 (3103)	Skip on No Zero	SKPNZ	BTFS 3,2	-
001 000 1ff fff (1040)	Test File	ISIF f	MOVF f,1	Z
001 000 0ff fff (1000)	Move File to W	MOVWF	MOVF f,0	Z
001 001 1ff fff (1140)	Negate File	NEGF f,d	COMF f,1	-
001 010 dff fff (1200)			INCF f,d	Z
011 000 000 011 (3003)	Add Carry to File	ADDCF f,d	BTFS 3,0	-
001 010 dff fff (1200)			INCF f,d	Z
011 000 000 011 (3003)	Subtract Carry from File	SUBCF f,d	BTFS 3,0	-
000 011 dff fff (0300)			DECF f,d	Z
011 000 100 011 (3043)	Add Digit Carry to File	ADDDCF f,d	BTFS 3,1	-
001 010 dff fff (1200)			INCF f,d	Z
011 000 100 011 (3043)	Subtract Digit Carry from File	SUBDCF f,d	BTFS 3,1	-
000 011 dff fff (0300)			DECF f,d	Z
101 kkk kkk kkk (5000)	Branch	B k	GOTO k	-
011 000 000 011 (3003)	Branch on Carry	BC k	BTFS 3,0	-
101 kkk kkk kkk (5000)			GOTO k	-
011 100 000 011 (3403)	Branch on No Carry	BNC k	BTFS 3,0	-
101 kkk kkk kkk (5000)			GOTO k	-
011 100 100 011 (3043)	Branch on Digit Carry	BDC k	BTFS 3,1	-
101 kkk kkk kkk (5000)			GOTO k	-
011 001 000 011 (3443)	Branch on No Digit Carry	BNDC k	BTFS 3,1	-
101 kkk kkk kkk (5000)			GOTO k	-
011 101 000 011 (3103)	Branch on Zero	BZ k	BTFS 3,2	-
101 kkk kkk kkk (5000)			GOTO k	-
011 101 000 011 (3503)	Branch on No Zero	BNZ k	BTFS 3,2	-
101 kkk kkk kkk (5000)			GOTO k	-

GENERAL
INSTRUMENT


PIC1657

I/O INTERFACING

The equivalent circuit for an I/O port bit is shown below as it would interface with either the input of a TTL device (PIC is outputting) or the output of an open collector TTL device (PIC is inputting). Each I/O port bit can be individually time multiplexed between input and output functions under software control. When outputting thru a PIC I/O Port, the data is latched at the port and the pin can be connected directly to a TTL gate input.

When inputting data thru an I/O Port, the port latch must first be set to a high level under program control. This turns off Q_2 allowing the TTL open collector device to drive the pad, pulled up by Q_1 , which can source a minimum of $100\mu A$. Care, however, should be exercised when using open collector devices due to the potentially high TTL leakage current which can exist in the high logic state.

TYPICAL INTERFACE-BIDIRECTIONAL I/O LINE

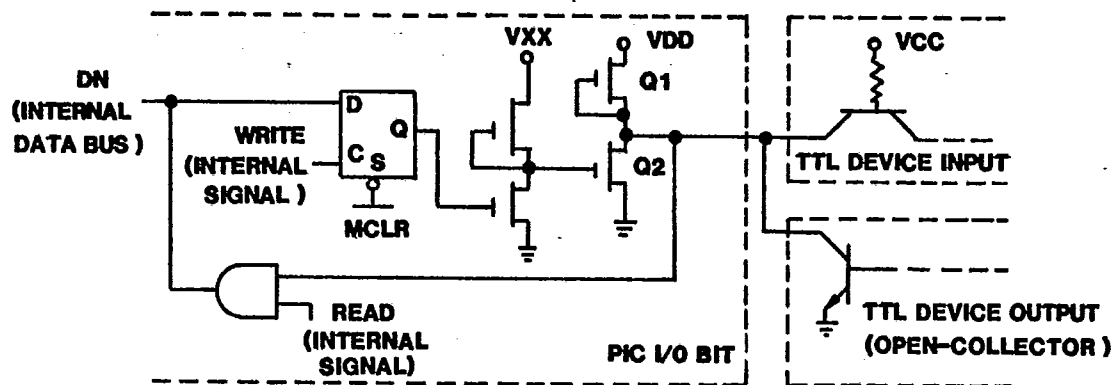

PROGRAMMING CAUTIONS

The use of the bidirectional I/O ports are subject to certain rules of operation. These rules must be carefully followed in the instruction sequences written for I/O operation.

Bidirectional I/O Ports

The bidirectional ports may be used for both input and output operations. For input operations these ports are non-latching. Any input must be present until read by an input instruction. The outputs are latched and remain unchanged until the output latch is rewritten. For use as an input port the output latch must be set in the high state. Thus the external device inputs to the PIC circuit by forcing the latched output line to the low state or keeping the latched output high. This principle is the same whether operating on individual bits or the entire port.

Some instructions operate internally as input followed by output operations. The BCF and BSF instructions, for example, read the entire port into the CPU, execute the bit operation, and re-output the result. Caution must be used when using these instructions. As an example a BSF operation

on bit 5 of F6 (port RB) will cause all eight bits of F6 to be read into the CPU. Then the BSF operation takes place on bit 5 and F6 is re-output to the output latches. If another bit of F6 is used as an input (say bit 0) then bit 0 must be latched high. If during the BSF instruction on bit 5 an external device is forcing bit 0 to the low state then the input/output nature of the BSF instruction will leave bit 0 latched low after execution. In this state bit 0 cannot be used as an input until it is again latched high by the programmer. Refer to the examples on the next page.


Successive Operations on Bidirectional I/O Ports

Care must be exercised if successive instructions operate on the same I/O port. The sequence of instructions should be such to allow the pin voltage to stabilize (load dependent) before the next instruction which causes that file to be read into the CPU (MOVF, BIT SET, BIT CLEAR, and BIT TEST) is executed. Otherwise, the previous state of that pin may be read into the CPU rather than the new state. This will happen if t_{pd} (See I/O Timing Diagram) is greater than $1/4t_{cy}$ (min). When in doubt, it is better to separate these instructions with a NOP or other instruction.

GENERAL
INSTRUMENT

PIC1657

EXAMPLE 1

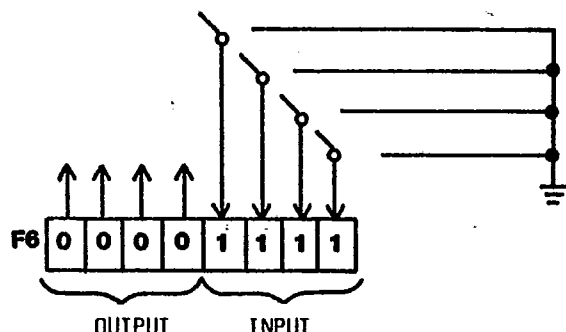

What is thought to be happening:

BSF 6,5


Read into CPU: 00001111

Set bit 5: 00101111

Write to F6: 00101111

If no inputs were low during the instruction execution, there would be no problem.

EXAMPLE 2

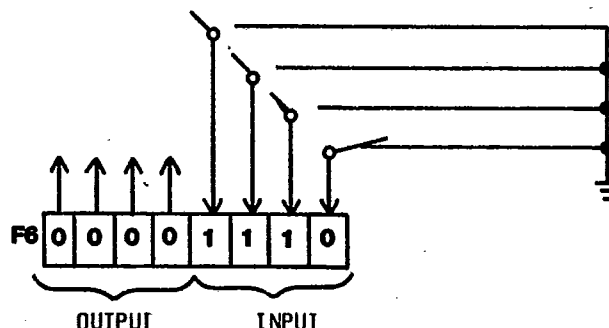

What could happen if an input were low:

BSF 6,5

Read into CPU: 00001110

Set bit 5: 00101110

Write to F6: 00101110

In this case bit 0 is now latched low and is no longer useful as an input until set high again.

Real Time Clock Counter

The Real Time Clock Counter can be read from and written to under software control. In addition, it can be used to count external events via the RTCC input. A prescaler counter between the RTCC input and the Real Time Clock Counter can be mask programed to enable the RTCC register to increment every 1, 2, 4, 8, or 16 negative edges of the RTCC input pin.

This allows the maximum frequency of the RTCC input to be (assume an instruction cycle time of 2us):

Prescaler Division Ratio	Maximum Input Frequency
1	0.454MHz
2	0.908MHz
4	1.81 MHz
8	3.63 MHz
16	4.0 MHz

NOTE: The Schmitt trigger input is valid only when a division ratio of 1 is selected. Otherwise, the input is a normal TTL compatible input.

Self-Contained Oscillator

When a crystal or ceramic resonator is connected between the OSC1 and OSC2 pins, the self-contained oscillator will generate a frequency determined by the external components thus allowing an accurate timing reference, a crystal to be used for time base control with a minimum of external parts.

The output of this oscillator is divided down by 8 to give the instruction cycle time of the micro-computer, thus with a 4MHz crystal the instruction cycle time is 2 us.

When test mode is enabled, the basic instruction cycle time is a division of 4 of the frequency applied to OSC1 and OSC2 allowing simpler synchronizing of the device and tester.

GENERAL
INSTRUMENT

PIC1657

ELECTRICAL CHARACTERISTICS

Maximum Ratings*

Ambient Temperature Under Bias..... 125°C
 Storage Temperature -55°C to + 150°C
 Voltage on any Pin with Respect to V_{SS}
 (except open drain)..... -0.3V to +9.0V
 Voltage on any Pin with Respect to V_{SS}
 (open drain)..... -0.3V to +13V
 Power Dissipation (Note 1)..... 800mW

*Exceeding these ratings could cause permanent damage to the device. This is a stress rating only and functional operation of this device at these conditions is not implied--operating ranges are specified in Standard Conditions. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Data labeled "typical" is presented for design guidance only and is not guaranteed.

Standard Conditions (Unless otherwise stated):

DC CHARACTERISTICS: PIC1657

Operating Temperature T_A = 0°C to +70°C

Characteristic	Sym	Min	Typ*	Max	Units	Conditions
Power Supply Voltage	V_{DD}	4.5	-	7.0	V	All I/O @ V_{DD} (See Primary Supply Current Chart for additional information) Note 4
Primary Supply Current	I_{DD}	-	30	65	mA	
Output Buffer Supply Voltage	V_{XX}	4.5	-	10	V	
Output Buffer Supply Current	I_{XX}	-	-	5	mA	
Input Low Voltage	V_{IL}	-0.2	-	0.8	V	I_{OH} = -100 μ A provided by internal pullups (Note 2) I_{OL} = 1.6mA (Note 3) $V_{SS} \leq V_{IN} \leq V_{DD}$ $0V \leq V_{PIN} \leq 12V$ V_{IL} = 0.4V (internal pullup) V_{IH} = 2.4V
Input High Voltage (except MCLR, $\overline{RTCC}$ & OSC1)	V_{IH}	2.4	-	V_{DD}	V	
Input High Voltage (MCLR, $\overline{RTCC}$, & OSC1)	V_{IH2}	$V_{DD}-1$	-	V_{DD}	V	
Output High Voltage	V_{OH}	2.4	-	V_{DD}	V	
Output Low Voltage (I/O only)	V_{OL1}	-	-	0.45	V	
Input Leakage Current (MCLR, $\overline{RTCC}$)	I_{LC}	-5	-	+5	μ A	
Output Leakage Current (open drain pins)	I_{OL}	-	-	10	μ A	
Input Low Current (all I/O ports)	I_{IL}	-0.2	-	-1.6	mA	
Input High Current (all I/O ports)	I_{IH}	-0.1	-0.4	-	mA	

* Typical data is at T_A = 25°C, V_{DD} = 5.0V

NOTES:

- Total power dissipation for the package is calculated as follows:
 $P_D = (V_{DD})(I_{DD}) + \sum (V_{DD}-V_{IL})(|I_{IL}|) + \sum (V_{DD}-V_{OH})(|I_{OH}|) + \sum (V_{OL})(I_{OL})$.
- Positive current indicates current into pin. Negative current indicates current out of pin.
- Total I_{OL} for all output pins must not exceed 175 mA.
- V_{XX} supply drives only the I/O ports.

GENERAL
INSTRUMENT

PIC1657

ELECTRICAL CHARACTERISTICS

Maximum Ratings*

Ambient Temperature Under Bias..... 125°C
 Storage Temperature -55°C to + 150°C
 Voltage on any Pin with Respect to V_{SS}
 (except open drain)..... -0.3V to +9.0V
 Voltage on any Pin with Respect to V_{SS}
 (open drain)..... -0.3V to +13V
 Power Dissipation (Note 1)..... 800mW

*Exceeding these ratings could cause permanent damage to the device. This is a stress rating only and functional operation of this device at these conditions is not implied--operating ranges are specified in Standard Conditions. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Data labeled "typical" is presented for design guidance only and is not guaranteed.

Standard Conditions (Unless otherwise stated):

DC CHARACTERISTICS: PIC1657I

Operating Temperature T_A = -40°C to +85°C

Characteristic	Sym	Min	Typ*	Max	Units	Conditions
Power Supply Voltage	V _{DD}	4.5	-	7.0	V	All I/O @ V _{DD} (See Primary Supply Current Chart for additional information) T _A = 0°C to 85°C Note 4
Primary Supply Current	I _{DD}	-	30	70	mA	
Output Buffer Supply Voltage	V _{XX}	4.5	-	10	V	
Output Buffer Supply Current	I _{XX}	-	-	5	mA	I _{OH} = -100µA provided by internal pullups (Note 2) I _{OL} = 1.6mA (Note 3) V _{SS} ≤ V _{IN} ≤ V _{DD} 0V ≤ V _{PIN} ≤ 9V V _{IL} = 0.4V (internal pullup) T _A = 0°C to 85°C V _{IH} = 2.4V
Input Low Voltage	V _{IL}	-0.2	-	0.8	V	
Input High Voltage (except MCLR, RTCC & OSC1)	V _{IH}	2.4	-	V _{DD}	V	
Input High Voltage (MCLR, RTCC, & OSC1)	V _{IH2}	V _{DD} -1	-	V _{DD}	V	
Output High Voltage	V _{OH}	2.4	-	V _{DD}	V	
Output Low Voltage (I/O only)	V _{OL1}	-	-	0.45	V	I _{OH} = -100µA provided by internal pullups (Note 2) I _{OL} = 1.6mA (Note 3) V _{SS} ≤ V _{IN} ≤ V _{DD} 0V ≤ V _{PIN} ≤ 9V V _{IL} = 0.4V (internal pullup) T _A = 0°C to 85°C V _{IH} = 2.4V
Input Leakage Current (MCLR, RTCC)	I _{LC}	-5	-	+5	µA	
Output Leakage Current (open drain pins)	I _{OL}	-	-	10	µA	
Input Low Current (all I/O ports)	I _{IL}	-0.2	-	-1.6	mA	
Input High Current (all I/O ports)	I _{IH}	-0.1	-0.4	-	mA	

*Typical data is at T_A = 25°C, V_{DD} = 5.0V

NOTES:

- Total power dissipation for the package is calculated as follows:

$$P_D = (V_{DD})(I_{DD}) + \sum (V_{DD} - V_{IL})(|I_{IL}|) + \sum (V_{DD} - V_{OH})(|I_{OH}|) + \sum (V_{OL})(I_{OL})$$
- Positive current indicates current into pin. Negative current indicates current out of pin.
- Total I_{OL} for all output pins must not exceed 175 mA.
- V_{XX} supply drives only the I/O ports.

GENERAL
INSTRUMENT

PIC1657

ELECTRICAL CHARACTERISTICS

Maximum Ratings*

Ambient Temperature Under Bias..... 125°C
 Storage Temperature -55°C to + 150°C
 Voltage on any Pin with Respect to V_{SS}
 (except open drain)..... -0.3V to +9.0V
 Voltage on any Pin with Respect to V_{SS}
 (open drain)..... -0.3V to +13V
 Power Dissipation (Note 1)..... 800mW

*Exceeding these ratings could cause permanent damage to the device. This is a stress rating only and functional operation of this device at these conditions is not implied--operating ranges are specified in Standard Conditions. Exposure to absolute maximum rating conditions for extended periods may affect device reliability

Data labeled "typical" is presented for design guidance only and is not guaranteed.

Standard Conditions (Unless otherwise stated):

DC CHARACTERISTICS: PIC1657H

Operating Temperature $T_A = -40^\circ\text{C}$ to $+110^\circ\text{C}$

Characteristic	Sym	Min	Typ*	Max	Units	Conditions
Power Supply Voltage	V_{DD}	4.5	-	5.5	V	All I/O @ V_{DD} (See Primary Supply Current Chart for additional information) $T_A = 0^\circ\text{C}$ to 110°C Note 4
Primary Supply Current	I_{DD}	-	35	73	mA	
Output Buffer Supply Voltage	V_{XX}	4.5	-	10	V	
Output Buffer Supply Current	I_{XX}	-	-	5	mA	$I_{OH} = -100\mu\text{A}$ provided by internal pullups (Note 2) $I_{OL} = 1.6\text{mA}$ (Note 3) $V_{SS} \leq V_{IN} \leq V_{DD}$
Input Low Voltage	V_{IL}	-0.2	-	0.8	V	
Input High Voltage (except MCLR, RTCC & OSC1)	V_{IH}	2.4	-	V_{DD}	V	
Input High Voltage (MCLR, RTCC, & OSC1)	V_{IH2}	$V_{DD}-1$	-	V_{DD}	V	
Output High Voltage	V_{OH}	2.4	-	V_{DD}	V	
Output Low Voltage (I/O only)	V_{OL1}	-	-	0.45	V	$0V \leq V_{PIN} \leq 9V$ $V_{IL} = 0.4V$ (internal pullup) $T_A = 0^\circ\text{C}$ to 110°C $V_{IH} = 2.4V$
Input Leakage Current (MCLR, RTCC)	I_{LC}	-10	-	+10	μA	
Output Leakage Current (open drain pins)	I_{OL}	-	-	20	μA	
Input Low Current (all I/O ports)	I_{IL}	-0.2	-	-1.6	mA	
Input High Current (all I/O ports)	I_{IH}	-0.1	-0.4	-	mA	

*Typical data is at $T_A = 25^\circ\text{C}$, $V_{DD} = 5.0V$

NOTES:

1. Total power dissipation for the package is calculated as follows:
 $P_D = (V_{DD}) (I_{DD}) + \sum (V_{DD}-V_{IL}) (I_{IL}) + \sum (V_{DD}-V_{OH}) (I_{OH}) + \sum (V_{OL}) (I_{OL})$.
2. Positive current indicates current into pin. Negative current indicates current out of pin.
3. Total I_{OL} for all output pins must not exceed 175 mA.
4. V_{XX} supply drives only the I/O ports.

GENERAL
INSTRUMENT

PIC1657

ELECTRICAL CHARACTERISTICS

Maximum Ratings*

Ambient Temperature Under Bias..... 125°C
 Storage Temperature -55°C to + 150°C
 Voltage on any Pin with Respect to V_{SS}
 (except open drain)..... -0.3V to +9.0V
 Voltage on any Pin with Respect to V_{SS}
 (open drain)..... -0.3V to +13V
 Power Dissipation (Note 1)..... 800mW

*Exceeding these ratings could cause permanent damage to the device. This is a stress rating only and functional operation of this device at these conditions is not implied--operating ranges are specified in Standard Conditions. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Data labeled "typical" is presented for design guidance only and is not guaranteed.

Standard Conditions (unless otherwise stated):

AC CHARACTERISTICS: PIC1657, PIC1657I and PIC1657H

Operating Temperature T_A = 0°C to +70°C, -40°C to +85°C and -40°C to +110°C

Characteristic	Sym	Min	Typ	Max	Units	Conditions
Instruction Cycle Time	t _{CY}	2	-	10	μs	0.8MHz - 4.0MHz external time base (Notes 1 and 2)
RTCC Input Period	t _{RT}	t _{CY} +0.2μs	-	-	-	Note 3
High Pulse Width	t _{RTH}	1/2 t _{RT}	-	-	-	
Low Pulse Width	t _{RTL}	1/2 t _{RT}	-	-	-	

NOTE:


1. Instruction cycle period (t_{CY}) equals eight times the input oscillator time base period.
2. The oscillator frequency may deviate to 4.08MHz to allow for tolerance of a crystal or ceramic resonator time base element.
3. The maximum frequency which may be input to the RTCC pin is calculated as follows:

$$f_{(max)} = \frac{1}{t_{RT(min)}} = \frac{1}{t_{CY(min)} + 0.2\mu s}$$

For example:

$$\text{If } t_{CY} = 2\mu s, f_{(max)} = \frac{1}{2.2\mu s} = 454\text{kHz}$$

RTCC TIMING

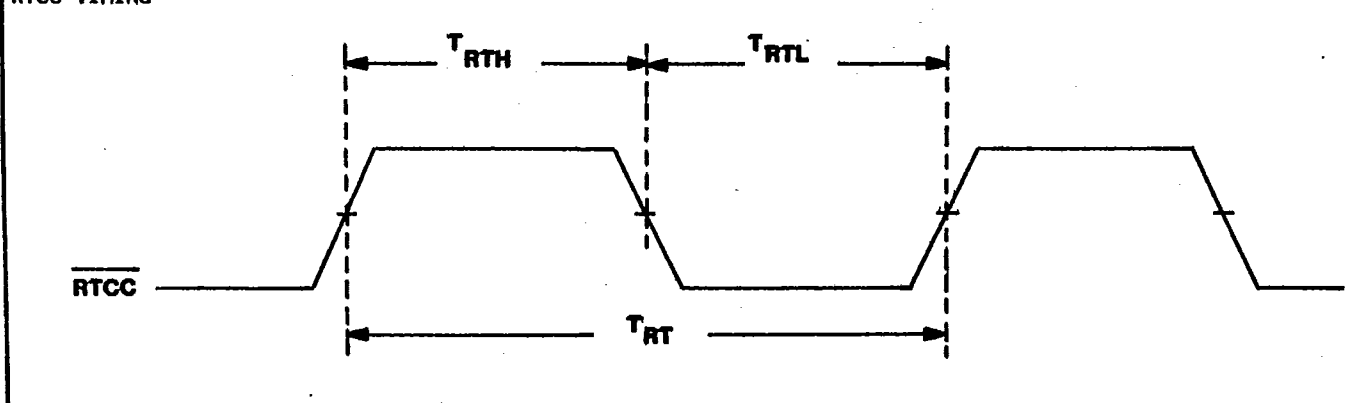


PIC1657


GENERAL
INSTRUMENT

PIC1657 OSCILLATOR OPTIONS (TYPICAL CIRCUITS)

CRYSTAL INPUT OPERATION

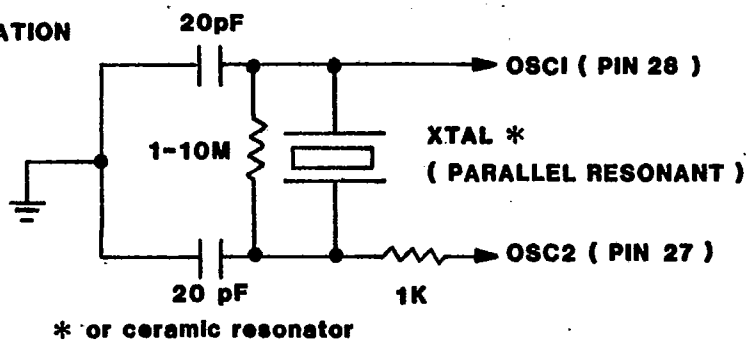


EXTERNAL CLOCK INPUT OPERATION

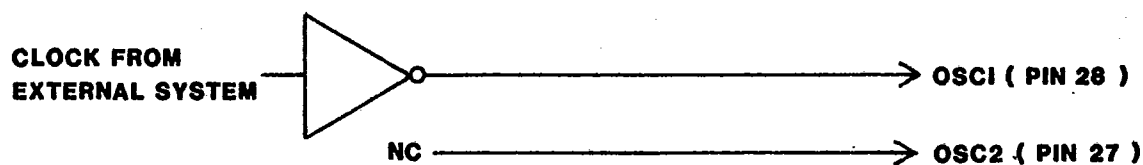

PIC1657

GENERAL
INSTRUMENT

MASTER CLEAR (TYPICAL CIRCUIT)

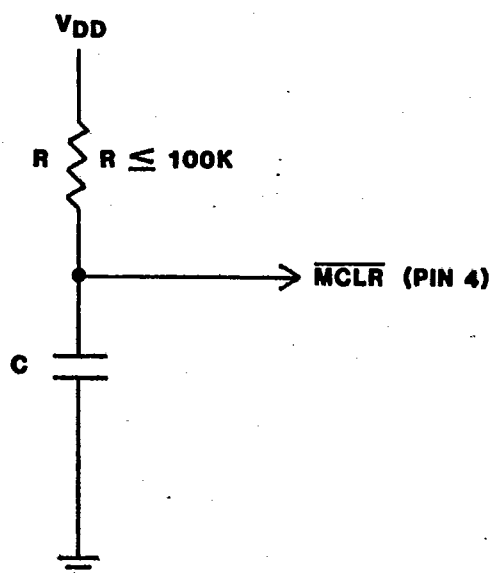

TYPICAL VALUES

 $R = 100K$ $C = 0.1\mu f$

The $\overline{MCLR}$ pin must be pulsed low for a minimum of one complete instruction cycle (t_{CY}) for the master clear function to be guaranteed, assuming that power is applied and the oscillator is running. For initial power application, a delay is required for the external oscillator time base element to start up before $\overline{MCLR}$ is brought high. To achieve this, an external RC configuration, as shown, can be used. This provides approximately a 10ms delay (assuming V_{DD} is applied as a step function), which may be insufficient for some time base elements. Consult the manufacturer of the time base element for specific start-up times.

OUTPUT SINK CURRENT GRAPH (TYPICAL)

