


Series: PJ031

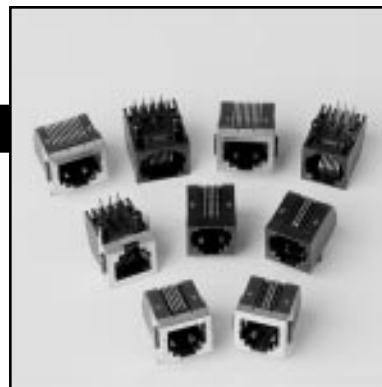



❖ 10 Position available, consult factory

Series options:

B = Ferrite bead

F = Flanged

S = Shielded

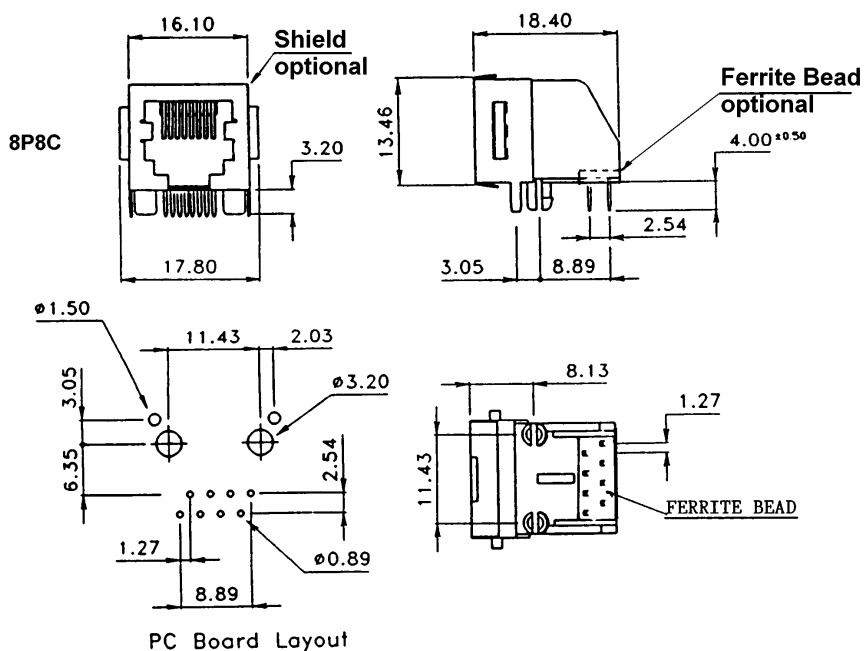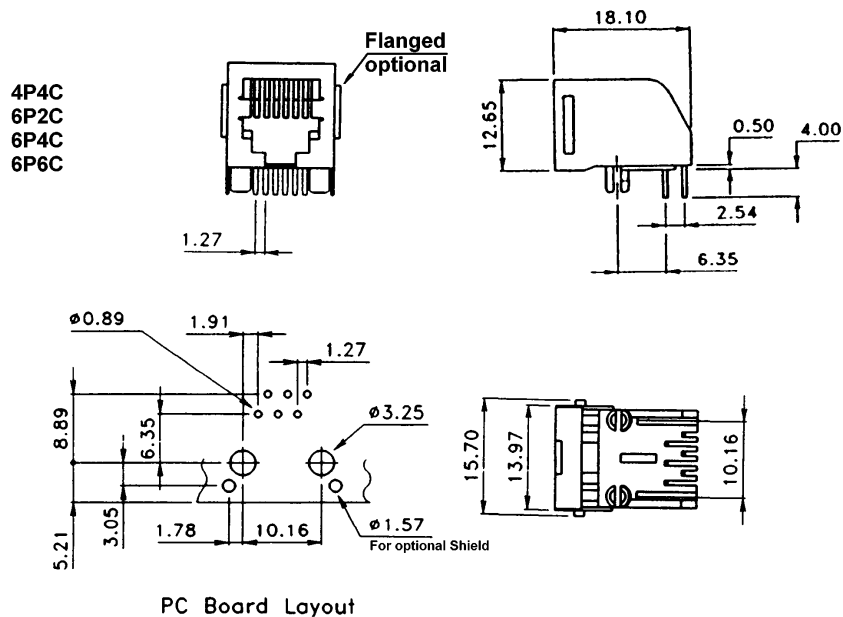

Specifications

Phone Jack Series:

PJ

Ratings:

Current	1.5A
Dielectric strength	1000V RMS for 1 minute
Contact resistance	20m Ω max.
Insulation resistance	500M Ω min.
Spring wire durability	500 mating cycles min.
Operating temperature	-25°C / +90°C

Material:

Plastic	PBT, Glass-filled UL94V-0
Color	Black
Spring wire	0.45mm Dia., Phosphor Bronze Gold plated over Nickel

ORDERING PROCEDURE

1 - 2 3 4 - 5

1) Series

2) Number of Positions (# P)

3) Number of Contacts (# C)

4) Plating:

1 = Full Flash Gold

2 = Full 10 μ Gold

3 = Full 30 μ Gold

4 = Full 50 μ Gold

5) Series options:

B = Ferrite Bead (only available on PJ031)

F = Flanged

S = Shield

K = Keyed

H = Shorting Bar (available only on PJ008, 8 position)