

PJ4N3KDW

30V Dual N-Channel Enhancement Mode MOSFET - ESD Protected

FEATURES


- $R_{DS(ON)}$, $V_{GS}@2.5V, I_{DS}@1mA=7.0\Omega$
- $R_{DS(ON)}$, $V_{GS}@4.0V, I_{DS}@10mA=5.0\Omega$
- Advanced Trench Process Technology
- High Density Cell Design For Ultra Low On-Resistance
- The MOSFET elements are independent, eliminating interference
- Mounting cost and area can be cut in half
- Very Low Leakage Current In Off Condition
- Specially Designed for Battery Operated Systems, Solid-State Relays Drivers : Relays, Displays, Lamps, Solenoids, Memories, etc.
- Low voltage drive (2.5V) makes this device ideal for portable equipment
- ESD Protected 2KV HBM
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: SOT-363 Package
- Terminals : Solderable per MIL-STD-750, Method 2026
- Marking : 4N3

SOT-363

Unit: inch (mm)

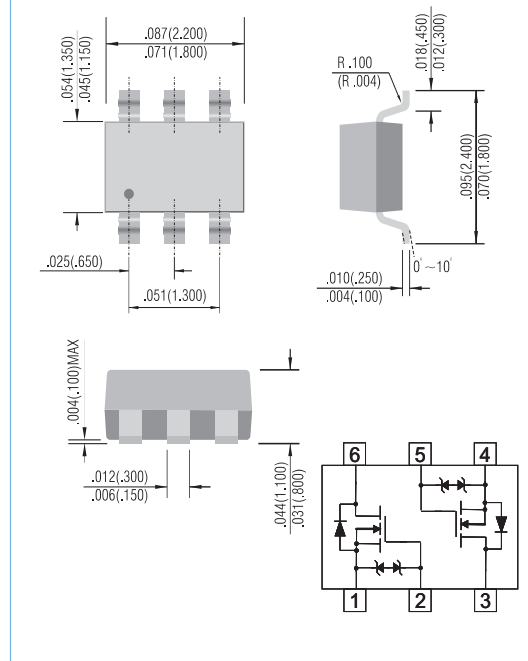

Absolute Maximum Ratings ($T_A=25^{\circ}C$)

Parameter	Symbol	Limit	Units
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	100	mA
Pulsed Drain Current ⁽¹⁾	I_{DM}	800	mA
Maximum power Dissipation	P_D	200 120	mW
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150	$^{\circ}C$
Junction-to Ambient Thermal Resistance (PCB mounted) ⁽²⁾	$R_{\theta JA}$	625	$^{\circ}C/W$

- Note: 1. Maximum DC current limited by the package
2. Surface mounted on FR4 board, $t < 5$ sec

PAN JI T RESERVES THE RIGHT TO IMPROVE PRODUCT DESIGN,FUNCTIONS AND RELIABILITY WITHOUT NOTICE



PJ4N3KDW

ELECTRICAL CHARACTERISTICS (T_A=25°C)


Parameter	Symbol	Test Condition	Min.	Typ.	Max.	Units
Static						
Drain-Source Breakdown Voltage	BV _{DSS}	V _{GS} =0V, I _D =10uA	30	-	-	V
Gate Threshold Voltage	V _{GS(th)}	V _{DS} =3.0V, I _D =100uA	0.8	-	1.5	V
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} =2.5V, I _D =1mA	-	-	7.0	Ω
Drain-Source On-State Resistance	R _{DS(on)}	V _{GS} =4.0V, I _D =10mA	-	-	5.0	
Zero Gate Voltage Drain Current	I _{DSS}	V _{DS} =30V, V _{GS} =0V	-	-	1	uA
Gate Body Leakage	I _{GSS}	V _{GS} =±20V, V _{DS} =0V	-	-	5	uA
Forward Transconductance	g _{fs}	V _{DS} =3V, I _D =10mA	10	-	-	mS
Diode Forward Voltage	V _{SD}	I _S =115mA, V _{GS} =0V	-	0.78	1.3	V
Dynamic						
Total Gate Charge	Q _g	V _{DS} =15V, I _D =10mA V _{GS} =4.5V	-	-	0.8	nC
Turn-On Delay Time	td _(ON)	V _{DD} =5V, R _L =500Ω I _D =10mA, V _{GEN} =5V R _G =10Ω	-	30	35	ns
Rise Time	t _r		-	8.5	12	
Turn-Off Delay Time	td _(OFF)		-	84	100	
Fall time	t _f		-	32	40	
Input Capacitance	C _{iss}	V _{DS} =5V, V _{GS} =0V f=1.0MHz	-	25	35	pF
Output Capacitance	C _{oss}		-	8	12	
Reverse Transfer Capacitance	C _{rss}		-	2.5	5	

PJ4N3KDW

MOUNTING PAD LAYOUT

SOT-363

Unit: inch (mm)

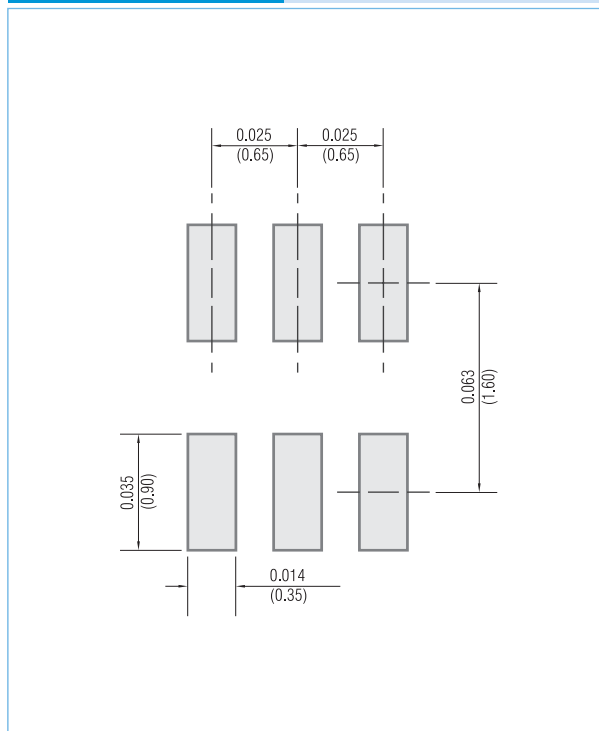

ORDER INFORMATION

- Packing information
 - T/R - 10K per 13" plastic Reel
 - T/R - 3K per 7" plastic Reel

LEGAL STATEMENT

Copyright PanJit International, Inc 2009

The information presented in this document is believed to be accurate and reliable. The specifications and information herein are subject to change without notice. Pan Jit makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose. Pan Jit products are not authorized for use in life support devices or systems. Pan Jit does not convey any license under its patent rights or rights of others.