

2N3684, 2N3685, 2N3686, 2N3687,  
PN3684, PN3685, PN3686, PN3687,




## 2N3684-87/PN3684-87 N-Channel JFETs

### General Description

The 2N3684/PN3684 thru 2N3687/PN3687 series of N-channel JFETs is characterized for general purpose small signal amplifier applications requiring low noise and tightly specified IDSS ranges.

### Absolute Maximum Ratings (25°C)

Gate-Drain or Gate-Source Voltage (Note 2)	-50V
Gate Current or Drain Current	50 mA
Total Device Dissipation (Derate 2 mW/°C to 175°C)	350 mW
Storage Temperature Range	
2N Series	-65°C to +200°C
PN Series	-65°C to +150°C
Lead Temperature (1/16" from case for 10 seconds)	300°C

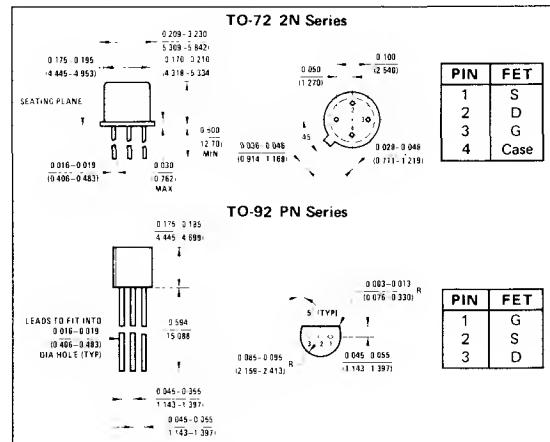

### Electrical Characteristics (25°C unless otherwise noted)

PARAMETER	CONDITIONS	2N3684/ PN3684		2N3685/ PN3685		2N3686/ PN3686		2N3687/ PN3687		UNITS
		MIN	MAX	MIN	MAX	MIN	MAX	MIN	MAX	
IGSS	Gate Reverse Current VGS = -30V, VDS = 0		-0.1		-0.1		-0.1		-0.1	nA
			-0.5		-0.5		-0.5		-0.5	
BVGSS	Gate-Source Breakdown Voltage	IG = -1 μA, VDS = 0	-50		-50		-50		-50	V
			-5		-1		-3.5		-2	
VGS(off)	Gate-Source Cutoff Voltage	VDS = 20V, ID = 1 nA	-2	-5	-1	-3.5	-0.6	-2	-0.3	mA
			-		-		-0.65		-0.55	
IDSS	Saturation Drain Current	VDS = 20V, VGS = 0	2.5	7.5	1	3	0.4	1.2	0.1	mA
			-		-		-		-	
rDS(on)	Drain Source ON Resistance	VDS = 0V, VGS = 0, (Note 1)	-	600	-	800	-	1200	-	Ω
			-		-		-		-	
gfs	Common-Source Forward Transconductance, (Note 3)	VDS = 20V, VGS = 0	2000	3000	1500	2500	1000	2000	500	μmho
			f = 1 kHz		50		25		10	
gos	Common-Source Output Conductance	VDS = 20V, VGS = 0	-	1.2	-	1.2	-	1.2	-	pF
			f = 1 kHz		-		-		-	
Crss	Common-Source Reverse Transfer Capacitance	VDS = 20V, VGS = 0	-	4	-	4	-	4	-	pF
			f = 1 kHz		-		-		-	
Ciss	Common Source Input Capacitance	VDS = 10V, VGS = 0	0.15	0.15	-	0.15	-	0.15	-	μV √Hz
			f = 20 Hz		-		-		-	
en	Equivalent Short-Circuit Input Spot Noise Voltage	VDS = 10V, VGS = 0	0.5	0.5	-	0.5	-	0.5	-	dB
			f = 100 Hz		-		-		-	
NF	Noise Figure	VDS = 10V, VGS = 0, Rgen = 10M, BW = 6 Hz	0.5	0.5	-	0.5	-	0.5	-	dB
			f = 100 Hz		-		-		-	

Note 1: Not JEDEC registered data.

Note 2: Due to symmetrical geometry, these units may be operated with source and drain leads interchanged.

Note 3: Pulse test duration: 2 ms.