

# PRF18BD471QB5RB



In Production

Recommended

RoHS

REACH

## Appearance & Shape



| Part Number | Dimensions (mm) |          |          |            |          |
|-------------|-----------------|----------|----------|------------|----------|
|             | L               | W        | T        | e          | g        |
| PRF18_RB    | 1.6±0.15        | 0.8±0.15 | 0.8±0.15 | 0.1 to 0.6 | -        |
| PRF21_RA    | 2.0±0.2         | 1.25±0.2 | 0.9±0.2  | 0.2 min.   | 0.5 min. |

## Features

- 1.SMD type is helpful for miniaturizing circuits because of its small size and light weight.
- 2.Excellent thermal response due to small size
- 3.Solid-state construction provides excellent mechanical vibration and impact resistance.
- 4.Contactless operation provides noiseless operation.
- 5.Lead is not contained in the terminations.

## Applications

Limited Usage    Consumer Grade


## Packaging Information

| Packaging | Specifications   | Minimum Order Quantity |
|-----------|------------------|------------------------|
| RB        | 180mm Paper Tape | 4000                   |

### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# PRF18BD471QB5RB



## Specifications

|   |                |
|---|----------------|
| Max. Voltage                                | 32V            |
| Sensing Temperature                         | 95°C           |
| Sensing Temperature Tolerance               | ±5°C           |
| Measure Condition of Sensing Temperature    | at 4.7k ohm    |
| Sensing Temperature(2)                      | 110°C          |
| Sensing Temperature (2) Tolerance           | ±7°C           |
| Measure Condition of Sensing Temperature(2) | at 47k ohm     |
| Resistance (25°C)                           | 470Ω           |
| Resistance Value Tolerance (at 25°C)        | ±50%           |
| Operating Temperature Range                 | -20°C to 120°C |
| Size Code (in mm)                           | 1.6x0.8mm      |
| Size Code (in inch)                         | 0.6x0.3inch    |
| Shape                                       | SMD            |
| Mass  | 0.004g         |


### Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.


2.This datasheet has only typical specifications because there is no space for detailed specifications.  
 Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# PRF18BD471QB5RB

## Product Data

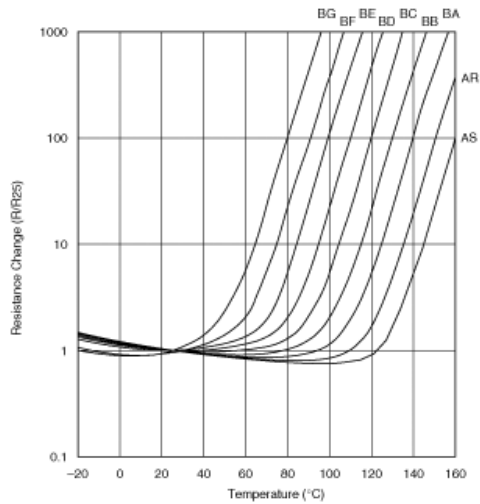

Resistance-Temperature Characteristics

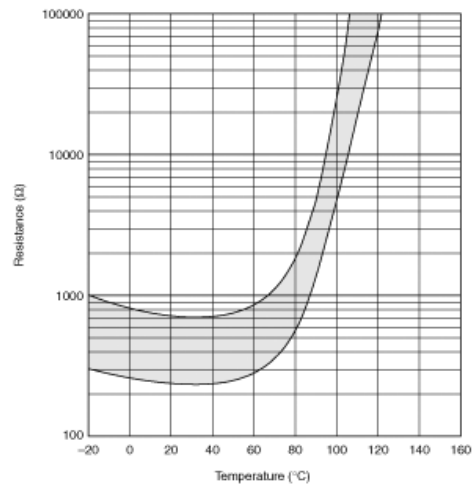

Resistance-Temperature Characteristics Range (Reference)

**Attention**  
1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.  
2.This datasheet has only typical specifications because there is no space for detailed specifications.  
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.