




FEATURES

- Frequency Range: 1690 - 1760 MHz
- Step Size: 50 KHz
- PLL - Style Package

APPLICATIONS

- Telecommunications
- Satellite
- Telemetry

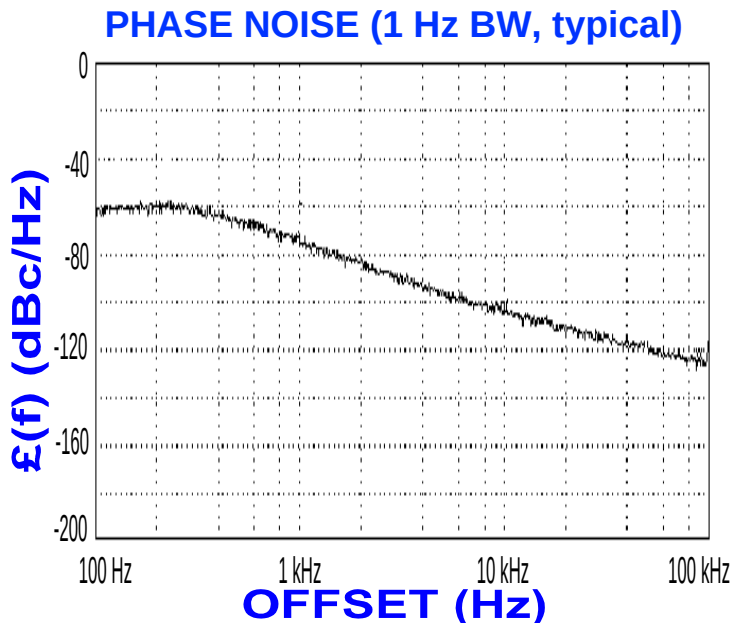

PERFORMANCE SPECIFICATIONS

	VALUE	UNITS
Frequency Range	1690 - 1760	MHz
Phase Noise @ 10 kHz offset (1 Hz BW, typ.)	-104	dBc/Hz
Harmonic Suppression (2nd, typ.)	-15	dBc
Sideband Spurs (typ.)	-70	dBc
Power Output	3.5±2.5	dBm
Load Impedance	50	Ω
Step Size	50	KHz
Charge Pump Output Current	1000	μ A
Switching Speed (typ., adjacent channel)	4	mSec
Startup Lock Time (typ.)	6	mSec
Operating Temperature Range	-40 to 85	$^{\circ}$ C
Package Style	PLL	

POWER SUPPLY REQUIREMENTS

Supply Voltage (Vcc, nom.)	5	Vdc
Supply Current (Icc, typ.)	33	mA

All specifications are typical unless otherwise noted and subject to change without notice.

APPLICATION NOTES

- AN-107 : How to Solder Z-COMM VCOs / PLLs
- AN-200 : Mounting and Grounding of Z-COMM PLLs
- AN-201 : PLL Fundamentals AN-202 : PLL Functional Description

NOTES:

Reference Oscillator Signal: $5 \text{ MHz} < f_{\text{osc}} < 40 \text{ MHz}$
 Frequency Synthesizer: National Semiconductor - LMX2326

VCO TUNING CURVE, typ.

FREQUENCY (MHz)

□ 70 °C
■ 25 °C
● 0 °C

TUNING VOLTAGE (Vdc)

VCO POWER CURVE, typ.

OUTPUT POWER (dBm)

■ 25 °C

FREQUENCY (MHz)

PHYSICAL DIMENSIONS

