



Programmable Rolling Code Encoder IC

Preliminary

PT2282

DESCRIPTION

PT2282 is a programmable rolling code encoder IC utilizing CMOS Technology specially designed for remote control applications. It has a maximum of 20 programmable Address Codes, 4 Data Bits, and 10 Rolling Code Bits. A total of 1,024 rolling code combinations and power saving feature are also provided.

PT2282 encodes the programmed codes into a coded waveform suitable for RF modulation. Pin assignments and application circuit are optimized for easy PCB Layout and cost saving advantage. Housed in either 8 pins or 16 pins DIP or SO Package, PT2282 also provides anti-scan features.

FEATURES

- CMOS Technology
- Low Power Consumption
- Least External Components
- High Noise Immunity
- Single Resistor Oscillator
- Operating Voltage: 1.8 V to 15 V
- Up to 2^{20} Address Codes
- Up to 4 Data pins
- Up to 2^{30} Output Code Combinations
- Power Saving Feature
- Available in 8-pin or 16-pin, SO or DIP Package

APPLICATIONS

- Burglar Alarm System
- Car Security System
- Car/Garage Door Controller
- Home/Office Security System
- Personal Alarm System




Programmable Rolling Code Encoder IC


Preliminary

PT2282

PIN CONFIGURATIONS

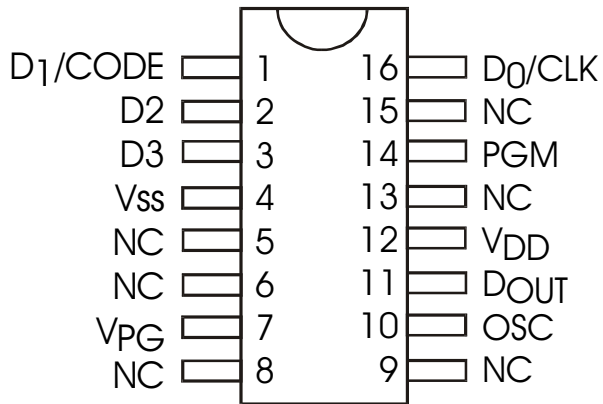


PT2282 (16 PINS)

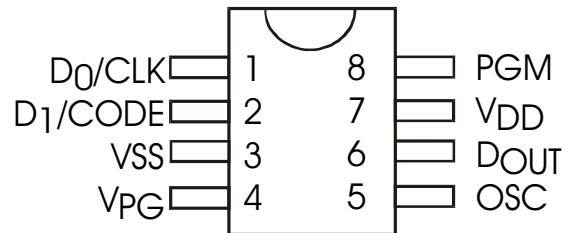

PT2282 (8 PINS)

APPLICATION CIRCUITS

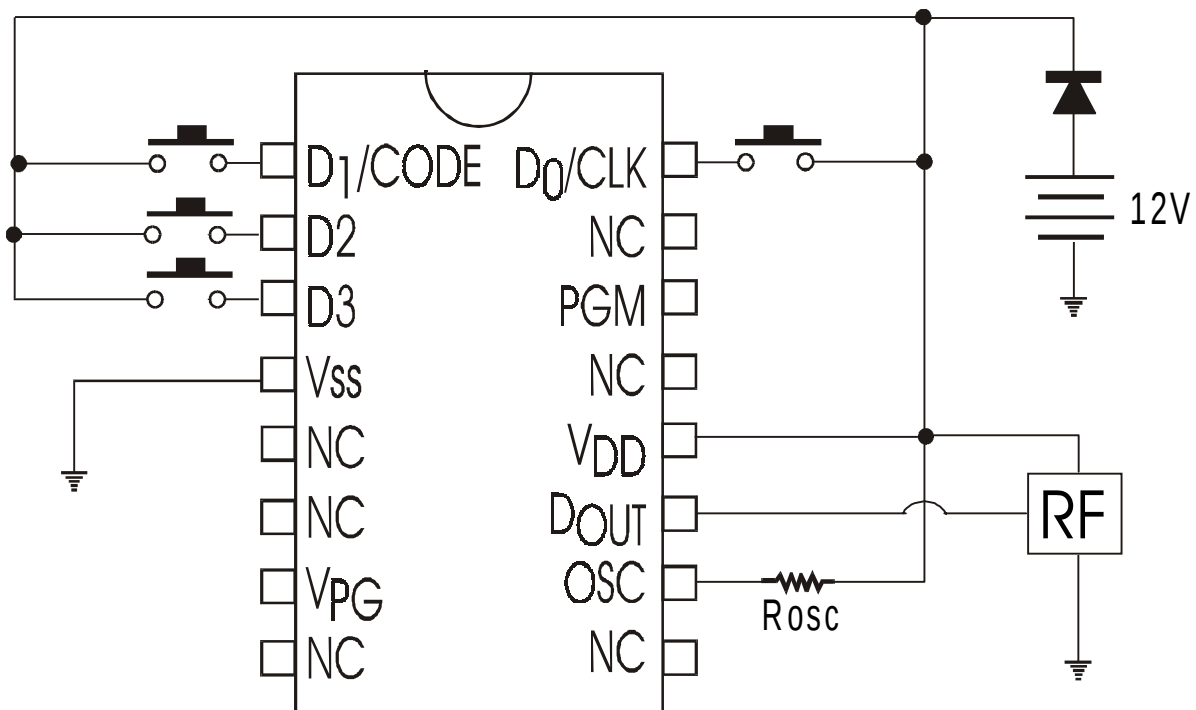


PT2282 (16 PINS)



Programmable Rolling Code Encoder IC

Preliminary

PT2282

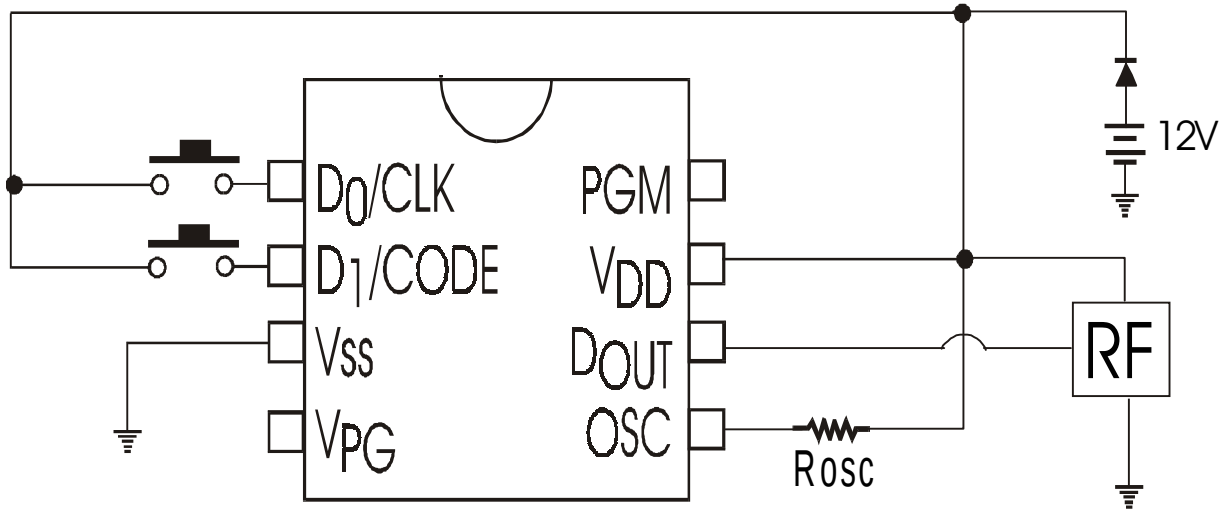

PT2282 (8 PINS)

Note: In order that IC protection is assured, please make sure that a diode is connected between the battery and the VDD. If the diode is not connected and the battery was inverted, then the IC will fail.