



PFC Device Corporation

## PT8L100SP

### 8A 100V HPTR® Schottky Rectifier

#### Major ratings and characteristics


Characteristics	Values	Units
$I_{F(AV)}$ Rectangular Waveform	8	A
$V_{RRM}$	100	V
$V_F$ @ 8A , $T_J=125^\circ\text{C}$	0.62	V, typ.
$T_J$ Operating Junction Temperature	-40 to +150	$^\circ\text{C}$

#### Features

- Super Low Forward Voltage ( SLVF® ) Drop
- Reliable High Temperature Operation
- Softest, fast switching capability
- $150^\circ\text{C}$  Operating Junction Temperature
- Lead Free Finish, RoHS Compliant
- Green Molding Compound (No Br, Sb)

#### Typical Applications

Device optimized for low forward voltage drop to maximize efficiency in Power Supply applications

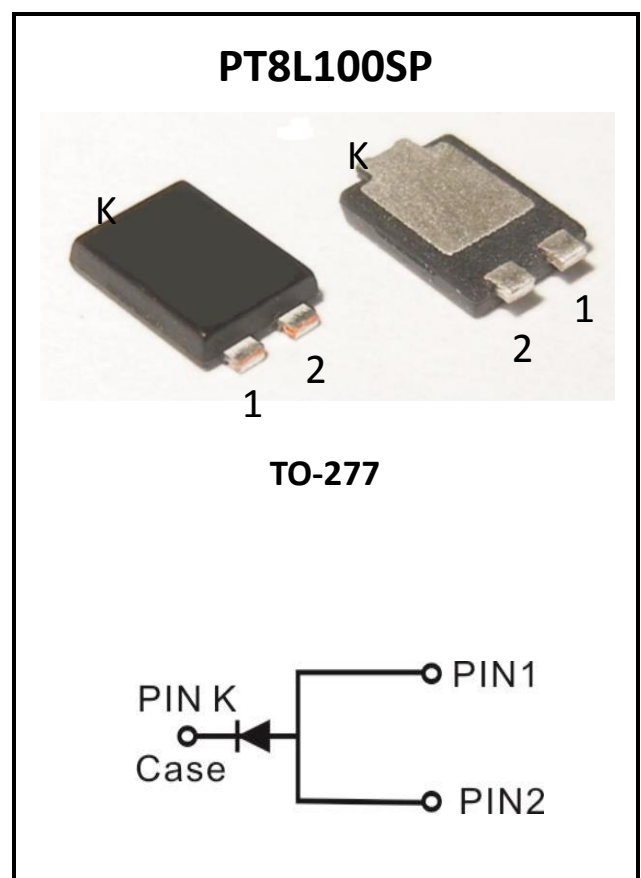

## 1. Characteristics

### Maximum Ratings Characteristics

(  $T_A = 25^{\circ}\text{C}$  unless otherwise specified )

Parameter	Symbol	Values	Units
DC Blocking Voltage	$V_{RM}$	100	Volts
Working Peak Reverse Voltage	$V_{RWM}$		
Peak Repetitive Reverse Voltage	$V_{RRM}$		
Average Rectified Forward Current Per device	$I_o$	8	Amps
Peak Forward Surge Current - 1/2 60hz	$I_{FSM}$	150	Amps
Non-repetitive avalanche energy at $I_{AS} = 2.0\text{A}, T_J = 25^{\circ}\text{C}$	$E_{AS}$	100	mJ
Peak Repetitive Reverse Surge Current (2uS-1Khz)	$I_{RRM}$	1	Amps
Typical Thermal Resistance	$R\theta_{JL}$	3.5	$^{\circ}\text{C} / \text{W}$
Operating Junction Temperature	$T_J$	- 40 to +150	$^{\circ}\text{C}$
Storage Junction Temperature	$T_{STG}$	- 40 to +150	

### Electrical Characteristics - (per leg)

(  $T_A = 25^{\circ}\text{C}$  unless otherwise specified )


Parameter	Test Conditions		Symbol	Typ.	Max.	Units
Instantaneous Forward Voltage	IF = 4 A	T <sub>J</sub> = 25 °C	VF*	0.54	----	Volts
	IF = 8 A			0.67	0.72	
	IF = 4 A	T <sub>J</sub> = 125 °C		0.50	----	
	IF = 8 A			0.62	0.67	
Instantaneous Reverse Current	VR=70V	T <sub>J</sub> = 25 °C	IR*	2.0	----	uA
	VR=100V			10.0	100	uA
	VR=70V	T <sub>J</sub> = 125 °C		2.5	----	mA
	VR=100V			4.0	10	mA
* Pulse width < 300 uS, Duty cycle < 2%						




## 2. Characteristics Curves

### Ratings and Characteristics Curves


(  $T_A = 25^{\circ}\text{C}$  unless otherwise specified )

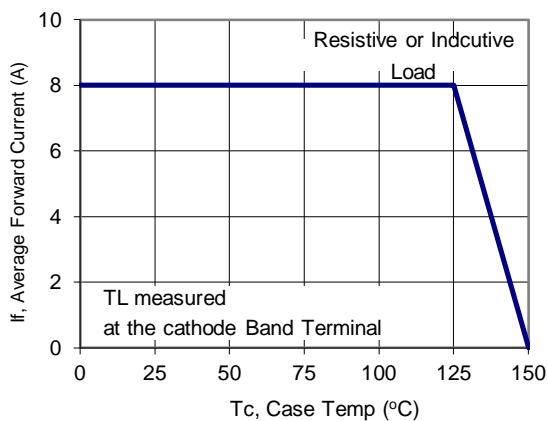


**Figure 1: Current Derating, Case**

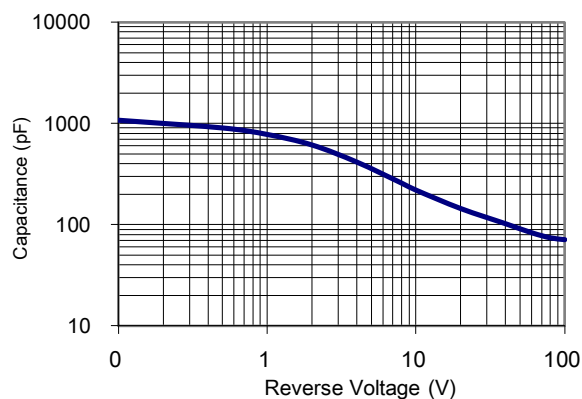

**Figure 2: Typical Junction Capacitance**

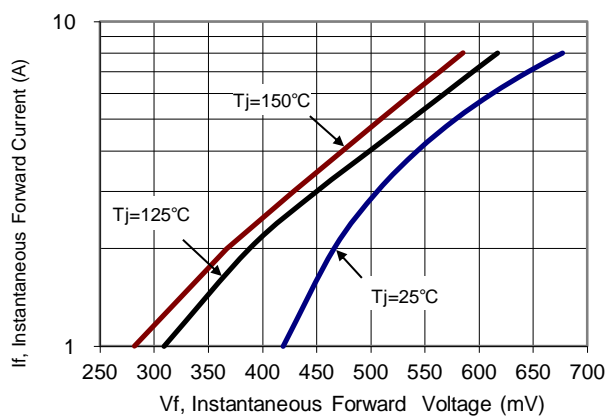

**Figure 3: Typical Forward Voltage**

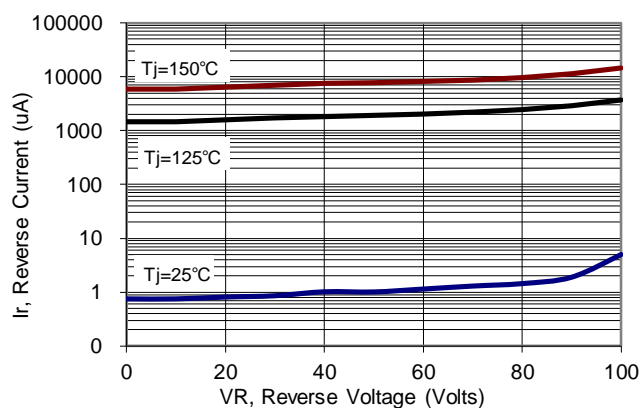


**Figure 4: Typical Reverse Current**



3. Marking information


Top Marking Rule

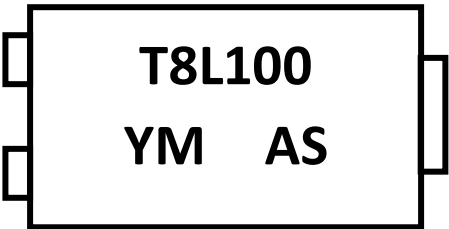


T8L100 = Product Type Marking Code  
YM = Date Code  
Y = Last one digits of year  
M = Month code  
A = Assembly Code  
S = Series Number

4. Package information

Suggested Package Outline Dimensions    millimeters

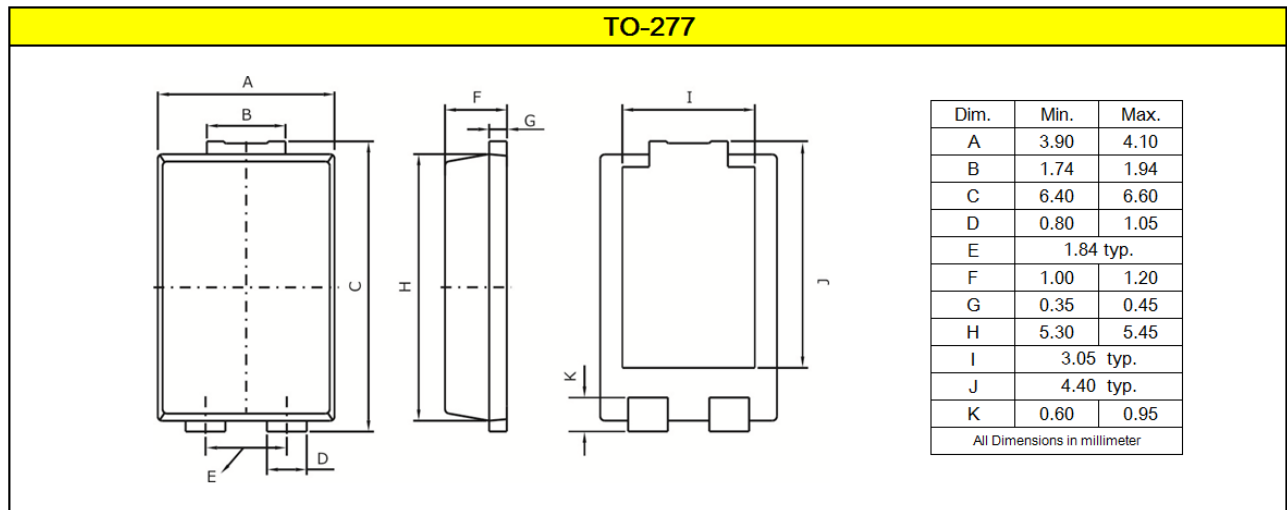


Mounting pad Outline Dimensions    millimeters

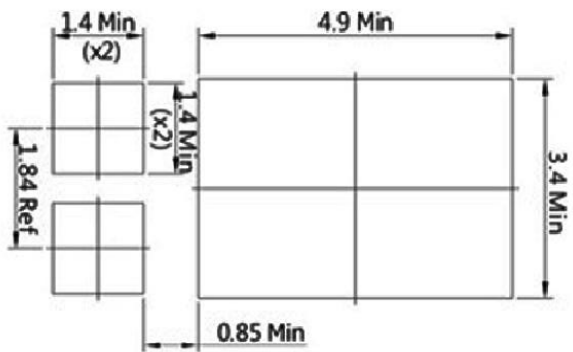

## 5. Packing and Ordering information

### Packing information    millimeters

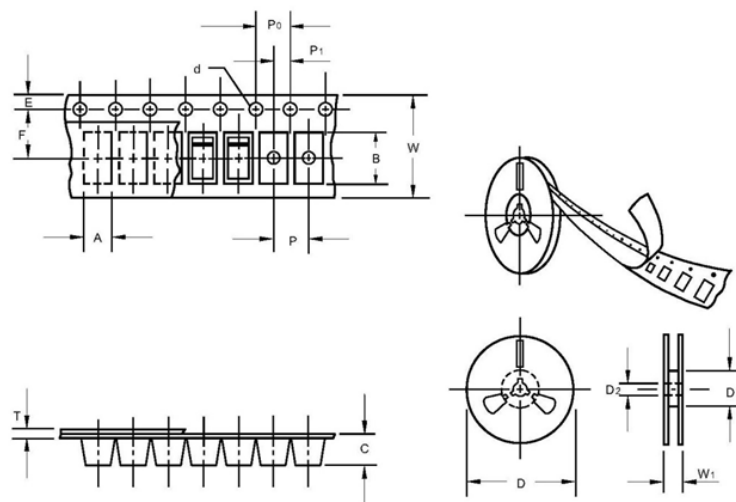

Item	Symbol	Dimension
Carrier width	A	4.4±0.10
Carrier length	B	7.0±0.10
Carrier depth	C	1.4±0.10
Sprocket hole	d	1.5±0.10
Reel outside diameter	D	330.0±1.0
Reel inner diameter	D1	75±1.0
Feed hole diameter	D2	13.5±1.0
Stocket hole position	E	1.75±0.10
Punch hole position	F	7.5±0.10
Punch hole pitch	P	8.0±0.10
Sprocket hole pitch	P0	4.0±0.10
Embossment center	P1	2.0±0.10
Totall tape thickness	T	0.3±0.10
Tape width	W	16.0±0.20
Reel width	W1	22.7±1.5

### Ordering information

Part Number	Package	Base Quantity	Delivery mode
PT8L100SP	TO-277	5000	13" diameter plastic tape and reel

### Mechanical

- Molder Plastic: UL Flammability Classification Rating 94V-0
- Device Weight : 0.003 ounces (0.093grams) - TO-277

PFC Device Corp reserves the right to make changes without further notice to any products herein. PFC Device Corp makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does PFC Device Corp assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in PFC Device Corp data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typical" must be validated for each customer application by customer's technical experts. PFC Device Corp does not convey any license under its patent rights nor the rights of others. PFC Device Corp products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the PFC Device Corp product could create a situation where personal injury or death may occur. Should Buyer purchase or use PFC Device Corp products for any such unintended or unauthorized application, Buyer shall indemnify and hold PFC Device Corp and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that PFC Device Corp was negligent regarding the design or manufacture of the part.

