

PTGL07AR8R2M3P51B0


In Production

Recommended

RoHS

REACH

Appearance & Shape

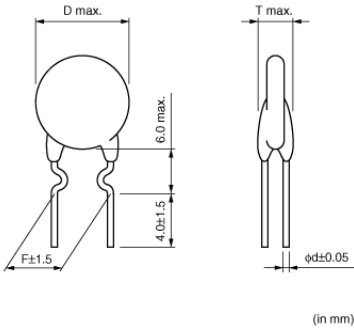

Features

1. Best suited to meet the requirements for power supplies and motor protection. Error-free operations are assured by rush current.
 2. Circuit is protected until current is turned off.
 3. Restores the original low resistance value automatically once the overload is removed.
 4. Non-contact design leads to long life and no noise.
- Durable and strong against mechanical vibration and shock because it is a solid element.

Applications


Limited Usage	Consumer Grade
Other Usage	1. DC cooling fan motors in office equipment, e.g., computers, facsimiles, floppy disk drives and power units. 2. DC drive motors in VTRs and cassette tape recorders. Power transformers (at secondary winding)

Packaging Information

Packaging	Specifications	Minimum Order Quantity
B0	Bulk(Bag)	500

Attention
 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
 2.This datasheet has only typical specifications because there is no space for detailed specifications.
 Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

PTGL07AR8R2M3P51B0



Specifications

Max. Voltage	56V	d: Lead Diameter	0.6mm
Hold Current	130mA	Shape	Lead
Measure Condition of Hold Current	(at +60°C)	Mass	0.29g
Hold Current (2)	165mA		
Measure Condition of Hold Current (2)	(at +25°C)		
Trip Current	300mA		
Measure Condition of Trip Current	(at +25°C)		
Trip Current(2)	350mA		
Measure Condition of Trip Current(2)	(at -10°C)		
Max. Current	1A		
Resistance (25°C)	8.2Ω		
Resistance Value Tolerance (at 25°C)	±20%		
Power Consumption(typ)	0.9W		
Operating Temperature Range	-10°C to 60°C		
D: Outer Dimension	7.4mm		
Thickness	4mm		
F: Lead Space	5mm		

Attention


1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.

2.This datasheet has only typical specifications because there is no space for detailed specifications.


Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

PTGL07AR8R2M3P51B0


Product Data

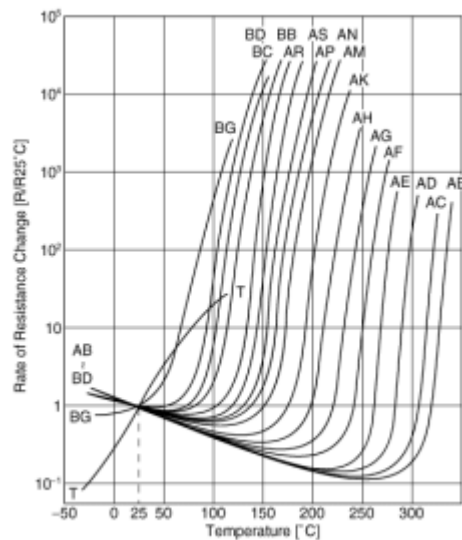

Resistance-Temperature Charac.

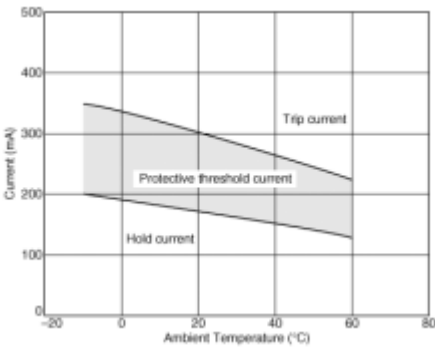

Protective Threshold Current Range

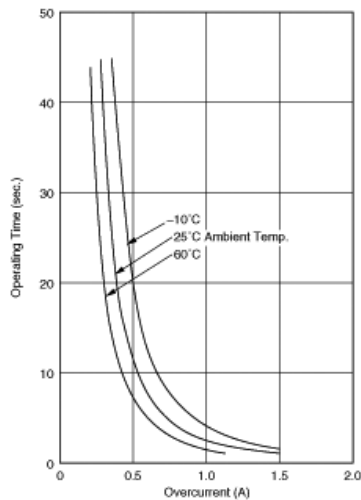

Operating Time (Typical Curve)

Attention

1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
2.This datasheet has only typical specifications because there is no space for detailed specifications.
Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.