


**FEATURES:**

- 2A switching capacity
- PC board mounting
- Size:21x10x12mm



Q19F(4078)

**Q19F**



Coil Voltage 3,5,6,7,12,15,24,48VDC  
Contact Ratings 2H:2N/O 2Z:2C/O  
ZHNQI Type

**CONTACT RATINGS**

Contact Ratings	2H/2Z
Contact Resistance	50m Ω (1A 6VDC)
Contact Material	AgCdO, AgS <sub>n</sub> O <sub>2</sub>
Contact capacity	2A 250VAC/30VDC

**SPECIFICATION**

Insulation Resistance	100M Ω . 500VDC
Dielectric Strength	BCC 1500V 1 min
	BOC 1000V 1 min
Operate Time	60ms/4ms
Terminal Type	PCB


**COIL RATINGS**

Nominal Coil Power	0.36W/0.45W
--------------------	-------------

**COIL VERSIONS**

Nominal Voltage VDC	Pull-in Voltage VDC	Release Voltage VDC	Coil Resistance Ω : ±10%
3	2.25	0.3	30
5	3.75	0.5	90
6	4.50	0.6	130
9	6.80	0.9	280
12	8.40	1.2	450
15	11.3	1.5	625
24	18.0	2.4	1600
48	36.0	4.8	4000

**DIMENSION.BOTTOM VIEW**

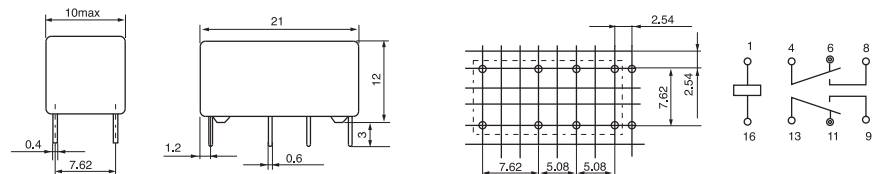

**REFERENCE DATA**

