

SPECIFICATIONS

Mechanical

Contact Retention Force: 0.50kg (1.10Lb) max.

Mating Force: 4.50kg (9.92Lb) max.

Unmating Force: 1.00~4.00kg (2.20~8.82Lb)

Durability: 100 Cycles

Electrical

Voltage Raging: 40V (RMS) **Current Rating:** 1.50A

Contact Resistance: $30m\Omega$ max.

Dielectric Withstanding Voltage: 500V AC/1min min.

Insulation Resistance: $1000M\Omega$ min.

Physical

Housing: Thermoplastic, UL 94V-0 rated in Ivory Color

Contact: Copper alloy

Plating: See "ORDERING INFORMATION" Operating Temperature: -20 $^{\circ}$ to +85 $^{\circ}$ Resistance to Soldering Heat: 260 $^{\circ}$ /5sec

QH Series


24 Pos.

Right Angle Type, T/H

1.905mm [.075"] Pitch

DVI Connector

DRAWING

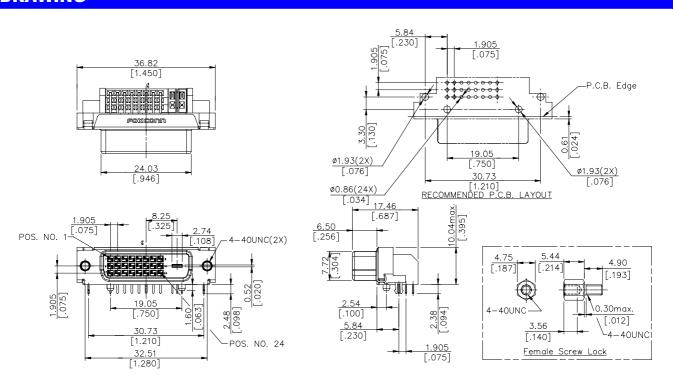

ORDERING INFORMATION

