

Features

Unregulated Converters

- 1W Power in SMD package
- Pin compatible with R1S series
- -40°C to +100°C operating temperature @ full load
- High 3kVDC/1 second or 1kVDC/1 second isolation
- IEC/EN/UL62368-1 certified, CB Report
- 5000m operation

R1SX

**1 Watt
SMD
Single Output**



IEC/EN62368-1 certified
UL62368-1 certified
IEC/EN60950-1 certified
C22.2 No. 62368-1-14 certified
CB Report
EN55032 compliant
EN55024 compliant

Description

Low cost, low profile, open-frame 1W SMD isolated DC/DC single output converters. The R1SX is available with 3.3V or 5V inputs and offers a single unregulated 3.3V or 5V output. There is no minimum load requirement and the quiescent consumption is less than 150mW. Standard isolation is 1kVDC/1s and a /H version with 3kVDC/1s is available. The operating temperature is from -40°C up to +100°C without derating. The pin-out is industry standard and compatible with the R1S/R1D series, but at half the height. The converters are fully certified to IEC/EN/UL62368 and IEC/EN/UL60950 and are 10/10 RoHS-conform. Class A EMC conformity requires only an input capacitor and a simple low cost LC filter is all that is needed for Class B EMC. Standard packaging is tape and reel.


Selection Guide

| Part Number | nom. Input Voltage [VDC] | Output Voltage [VDC] | Output Current [mA] | Efficiency typ. ⁽¹⁾ [%] | max. Capacitive Load ⁽²⁾ [µF] |
|-------------|--------------------------|----------------------|---------------------|------------------------------------|--|
| R1SX-3.33.3 | 3.3 | 3.3 | 303 | 74 | 2200 |
| R1SX-3.305 | 3.3 | 5 | 200 | 78 | 2200 |
| R1SX-0505 | 5 | 5 | 200 | 78 | 2200 |

Notes:

- Note1: Efficiency is tested at nominal input and full load at +25°C ambient
Note2: Max Cap Load is tested at nominal input and full resistive load

Model Numbering

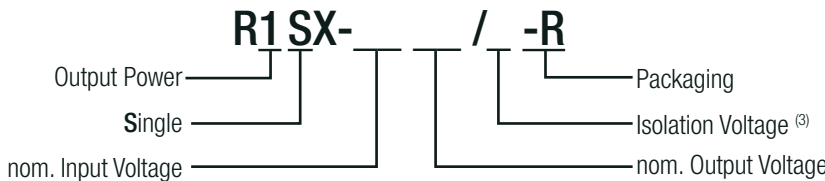

Notes:

- Note3: without suffix, standard isolation voltage (1kVDC/1 second)
with suffix „/H“, high isolation voltage (3kVDC/1 second)

Ordering Examples:

| | | | | |
|---------------|--------|-------|--------------------------|-------------------------|
| R1SX-3.305-R | 3.3Vin | 5Vout | 1kVDC/1 second isolation | tape and reel packaging |
| R1SX-0505/H-R | 5Vin | 5Vout | 3kVDC/1 second isolation | tape and reel packaging |



www.recom-power.com/eval-ref-boards

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

BASIC CHARACTERISTICS


| Parameter | Condition | Min. | Typ. | Max. |
|--|-----------|-------|--------|-----------|
| Internal Input Filter | | | | capacitor |
| Input Voltage Range | | | ±10.0% | |
| Quiescent Current | | | | 40mA |
| Minimum Load | | 0% | | |
| Internal Operating Frequency | | 20kHz | 60kHz | 100kHz |
| Output Ripple and Noise ⁽⁴⁾ | 20MHz BW | | | 100mVp-p |

Notes:


Note4: Measurements are made with a 0.1µF MLCC across output (low ESR)

Efficiency vs. Load

R1SX-3.33.3(/H)

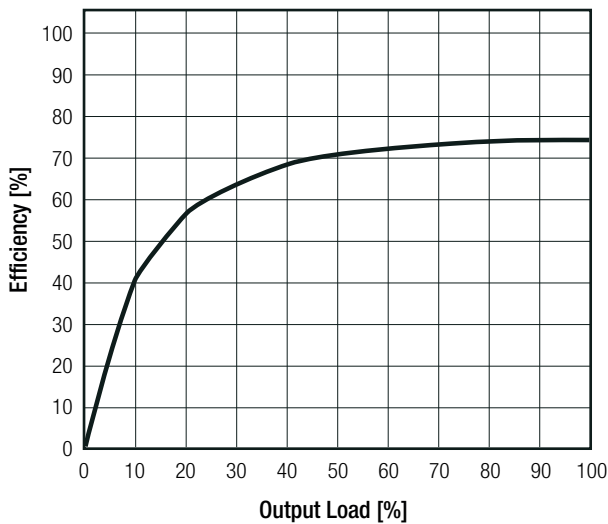

R1SX-xx05(/H)

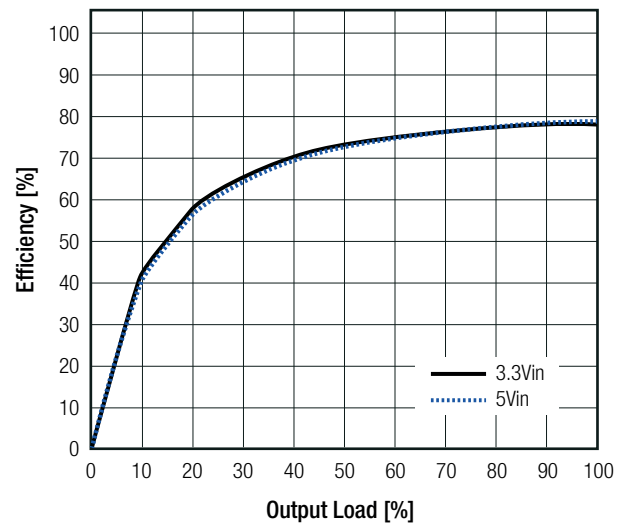


REGULATIONS


| Parameter | Condition | Value |
|-----------------|-----------------------|---|
| Output Accuracy | | ±5.0% max. |
| Line Regulation | low line to high line | ±1.2% typ. at 1.0% of Vin typ. |
| Load Regulation | 10% to 100% load | 3.3Vout: 10.0% typ. / 15.0% max. 5Vout: 7.0% typ. / 15.0% max. |

Tolerance Envelope

R1SX-3.33.3(/H)

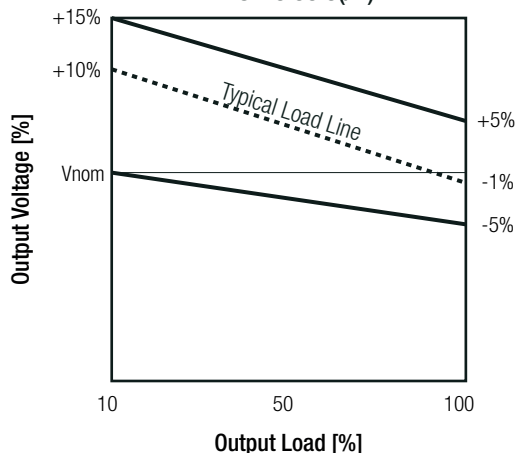

R1SX-xx05(/H)

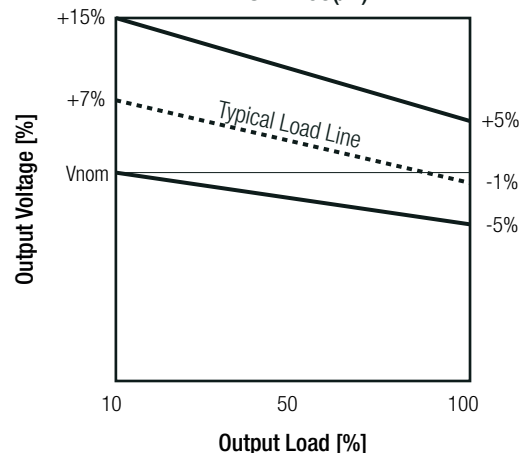

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

PROTECTIONS


| Parameter | Type | | Value |
|-----------------------|------------|------------------|------------------|
| | I/P to O/P | | |
| Isolation Voltage | I/P to O/P | standard | 1kVDC 500VAC |
| | | with suffix "/H" | 3kVDC 1.5kVAC |
| Isolation Resistance | | | 10GΩ min. |
| Isolation Capacitance | | | 70pF max. |
| Leakage Current | | standard | 1μA max. |
| | | with suffix "/H" | 3μA max. |
| Insulation Grade | | | functional |

Notes:

Note5: For repeat Hi-Pot testing, reduce the time and/or the test voltage

Note6: Refer to local safety regulations if input over-current protection is also required. Recommended fuse: slow blow type

Protection Circuit

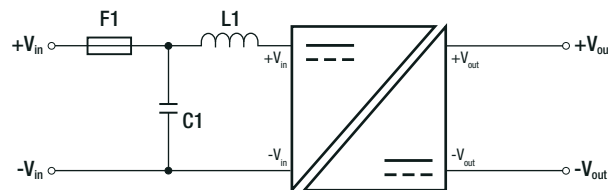


ENVIRONMENTAL

| Parameter | Condition | | Value |
|-----------------------------|--|--------|-------------------------------|
| Operating Temperature Range | @ natural convection and full load (refer to derating graph) | | -40°C to +100°C |
| Operating Altitude | | | 5000m |
| Operating Humidity | non-condensing | | 5% - 95% RH max. |
| Pollution Degree | | | PD2 |
| Vibration | | | according to MIL-STD-202G |
| MTBF | according to MIL-HDBK-217F, G.B. | +25°C | 21400 x 10 ³ hours |
| | | +100°C | 7800 x 10 ³ hours |

Derating Graph

(@ Chamber and natural convection 0.1m/s)

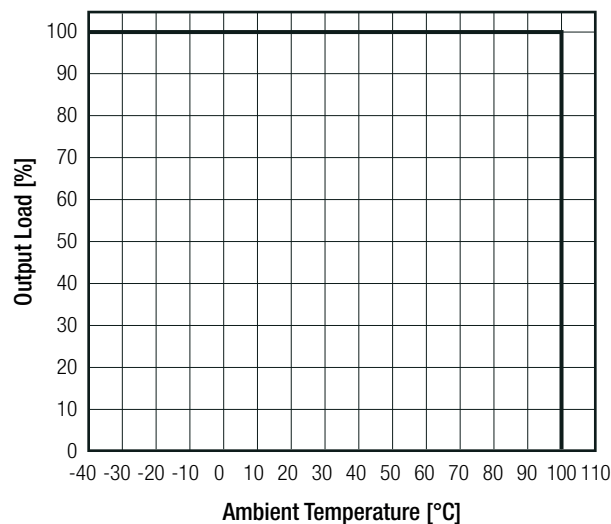


Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

SAFETY AND CERTIFICATIONS

| Certificate Type (Safety) | Report / File Number | Standard |
|---|----------------------|--|
| Information Technology Equipment, General Requirements for Safety | E224736 | UL60950-1, 2nd Edition 2014 CAN/CSA C22.2 No. 60950-1-07, 2nd Edition 2014 |
| Information Technology Equipment, General Requirements for Safety (CB Scheme) | E224736-4788277362-2 | IEC60950-1:2005 2nd Edition + A2:2013 |
| Information Technology Equipment, General Requirements for Safety | | EN60950-1:2006 + A2:2013 |
| Audio/video, information and communication technology equipment - Safety requirements (LVD) | E224736 | UL62368, 2nd Edition, 2014 CAN/CSA -C22.2 No. 62368-1-14, 2nd Edition, 2014 |
| Audio/video, information and communication technology equipment - Safety requirements | E224736-4788277362-1 | EN62368-1:2014 + A11:2017 |
| Audio/video, information and communication technology equipment - Safety requirements (CB Scheme) | | IEC62368-1:2014 2nd Edition |
| RoHS2+ | | RoHS 2011/65/EU + AM2015/863 |

| EMC Compliance | Condition | Standard / Criterion |
|--|---|---|
| Information technology equipment - Radio disturbance characteristics - Limits and methods of measurement | with external filter (see filter suggestion) | EN55032:2015, Class A and B |
| Information technology equipment - Immunity characteristics Limits and methods of measurement | | EN55024:2010 +A1:2015 |
| ESD Electrostatic discharge immunity test | Air: ±2, 4, 6, 8kV Contact: ±2, 4kV | IEC61000-4-2:2008, Criteria B |
| Radiated, radio-frequency, electromagnetic field immunity test | 3 V/m | IEC61000-4-3:2006 + A2:2010, Criteria A |
| Fast Transient and Burst Immunity | ±0.5kV | IEC61000-4-4:2012, Criteria A |
| Surge Immunity | ±0.5kV | IEC61000-4-5:2014, Criteria A |
| Immunity to conducted disturbances, induced by radio-frequency fields | 3V r.m.s. | IEC61000-4-6:2013, Criteria A |
| Power Magnetic Field Immunity | 50Hz / 1A/m | IEC61000-4-8:2009, Criteria A |

EMC Filtering Suggestions for EN55032

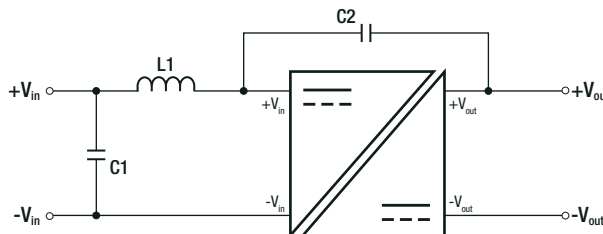

| Component List Class A | | | |
|------------------------|-----------|-------------|-----|
| Model | C1 | C2 | L1 |
| R1SX-3.3xxS | 22µF MLCC | 470pF/4kVDC | N/A |
| R1SX-05xxS | | | |

| Component List Class B | | | |
|------------------------|-----------|-------------|--------------------|
| Model | C1 | C2 | L1 |
| R1SX-3.3xxS | 22µF MLCC | 470pF/4kVDC | 3.3µH SMD Inductor |
| R1SX-05xxS | | | 10µF MLCC |


DIMENSION and PHYSICAL CHARACTERISTICS

| Parameter | Type | Value |
|-------------------|-------------|--|
| Material | case PCB | black plastic (UL94V-0) FR4 (UL94V-0) |
| Dimension (LxWxH) | | 12.75 x 11.10 x 5.80mm |
| Weight | | 1.0g typ. |

continued on next page

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

Dimension Drawing (mm)

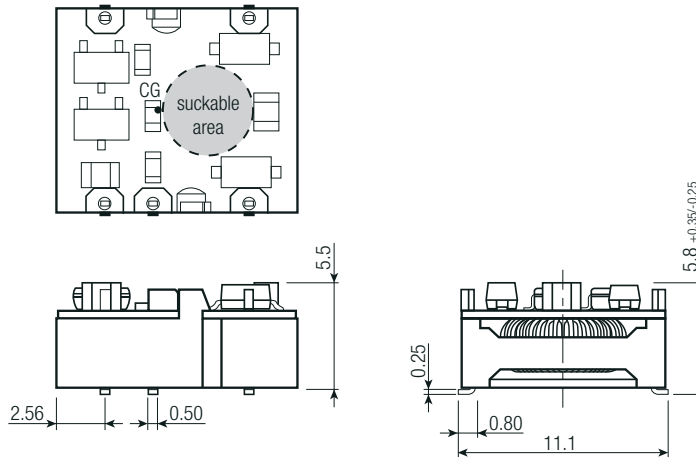


Pin Connection

| Pin # | Single |
|-------|--------|
| 1 | -Vin |
| 2 | +Vin |
| 4 | -Vout |
| 5 | +Vout |
| 8 | NC |

CG= center of gravity
 NC= no connection
 Tolerance: xx.x= ±0.5mm
 xx.xx= ±0.25mm


Pin
 Thickness: ±0.05mm
 Length: +0.25/-0.50mm

Recommended Footprint Details

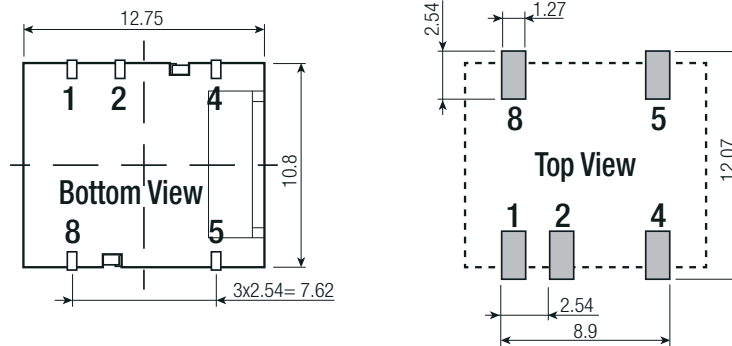

INSTALLATION and APPLICATION

Isolated Bus

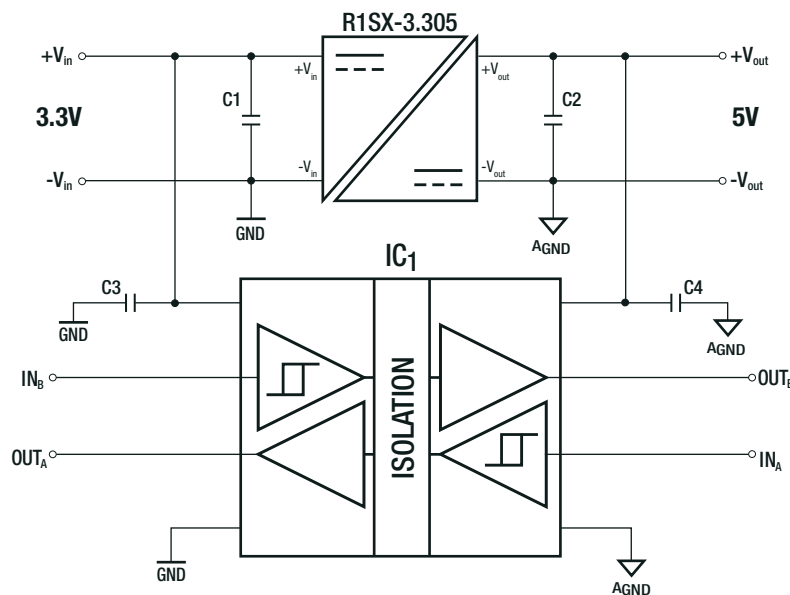

Block diagram of an isolated data interface with 3.3V to 5V logic level shifting. Typical Applications include microcontroller interfacing, logic level translation and multi-channel test and measurement systems.

Specifications (measured @ Ta= 25°C, nominal input voltage, full load unless otherwise specified)

| PACKAGING INFORMATION | | |
|-----------------------------|--------------------------------|--|
| Packaging Dimension (LxWxH) | tape and reel (carton) reel | 355.0 x 340.0 x 35.0mm 330.2 x 330.2 x 30.0mm |
| Packaging Quantity | tape and reel | 450pcs |
| Tape Width | | 24.0mm |
| Storage Temperature Range | | -55°C to +125°C |
| Storage Humidity | | 5% - 95% RH max. |

The product information and specifications may be subject to changes even without prior written notice. The product has been designed for various applications; its suitability lies in the responsibility of each customer. The products are not authorized for use in safety-critical applications without RECOM's explicit written consent. A safety-critical application is an application where a failure may reasonably be expected to endanger or cause loss of life, inflict bodily harm or damage property. The applicant shall indemnify and hold harmless RECOM, its affiliated companies and its representatives against any damage claims in connection with the unauthorized use of RECOM products in such safety-critical applications.