


型名: RCDC 10145

1、尺寸(毫米)

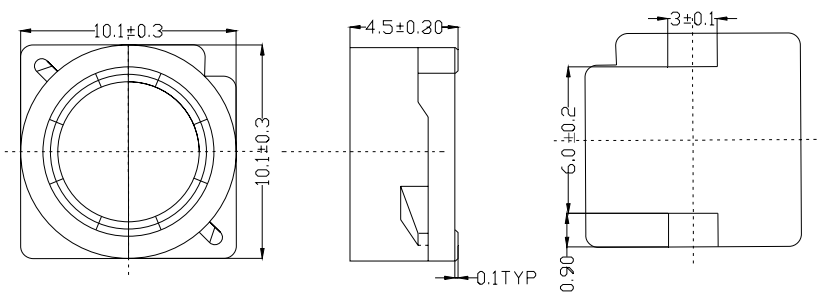

2. 技术参数

NO.	品 名	电感(μ H)	电阻 (m Ω) (MAX)	额定电流 (A)
1	RCDC 10145-1R0	1.0	15	7.6
2	RCDC 10145-3R3	3.3	20	5.1
3	RCDC 10145-4R7	4.7	25	3.7
4	RCDC 10145-6R8	6.8	31	3.2
5	RCDC 10145-100	10	35	3.0
6	RCDC 10145-220	22	59.1	2.0
7	RCDC 10145-470	47	102	1.4
8	RCDC 10145-101	100	200	1.0
9	RCDC 10145-151	150	350	0.77
10	RCDC 10145-471	470	1030	0.45
11	RCDC 10145-681	680	1600	0.38
12	RCDC 10145-102	1000	2800	0.30



无铅

测定频率 100kHz

电感公差范围 ($\pm 30\%$)

额定电流: 指电感值减小到原值 65%时的电流.