
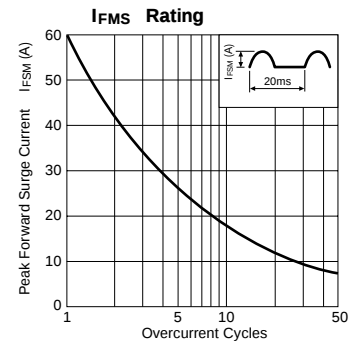
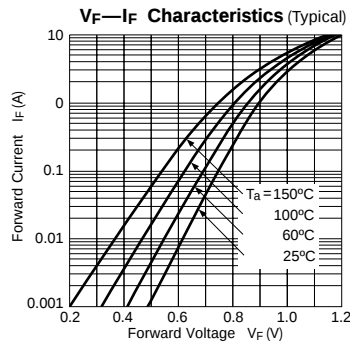





Damper Diodes (For TV)

Parameter Type No.	Absolute Maximum Ratings					Electrical Characteristics (Ta=25°C)								Others			
	V _{RM} (V)	I _F (A _V) (A) 50Hz Half-cycle Sinewave Single Shot		T _j (°C)	T _{stg} (°C)	V _F (V) max	I _F (A)	I _R (μA) V _R =V _{RM} max	I _R (H) (μA) V _R =V _{RM} Ta=100°C max	t _{rr} ① (μs)		t _{rr} ② (μs)		R _{th} (j-ℓ) (°C/W)	Mass (g)	Fig.	
RH 10F	1500	0.8	60	-40 to +150		1.0	1.0	10	500	4.0	1.3	100/200		15.0	0.44	Ⓐ	
RH 2D	1300	1.0												12.0	0.6	Ⓑ	
RH 2F	1500																
RH 3F	1500	2.5	50			1.3	2.5	50	350	100/100					10.0	1.0	Ⓒ
RH 3G	1600																
RH 4F	1500																
														8.0	1.2	Ⓓ	




RH 10F, 2D, 2F



RH 3F, 3G

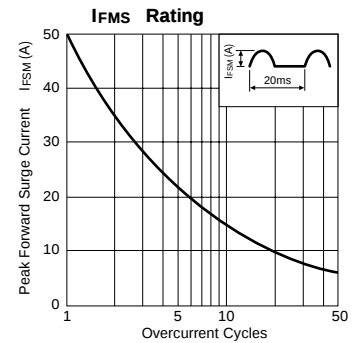

RH 4F

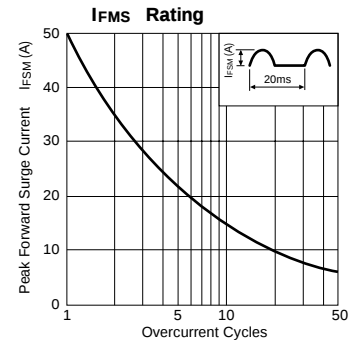

External Dimensions

(Unit: mm)

Flammability:
UL94V-0 or Equivalent

