


RadHard-by-Design**RHD5930 Digital-to-Analog Converter****11-Bit Ladder Output**

www.aeroflex.com/RHDseries

January 29, 2014

**FEATURES**

- ❑ Radiation performance
 - Total dose: $>1 \text{ Mrad(Si)}$, Dose rate = 50 - 300 rads(Si)/s
 - ELDRS Immune
 - SEL Immune: $>100 \text{ MeV-cm}^2/\text{mg}$
 - Neutron Displacement Damage: $>10^{14} \text{ neutrons/cm}^2$
- ❑ 11-Bit DAC
- ❑ Single power supply operation at +3.3V to +5V
- ❑ Low Power
- ❑ Full 4-quadrant multiplying DAC
- ❑ CMOS/TTL inputs
- ❑ Full military temperature range
- ❑ Designed for aerospace and high reliability space applications
- ❑ Packaging – Hermetic ceramic SOIC
 - 16 leads, 0.417"L x 0.300"W x 0.105"Ht
 - Typical Weight 0.8 grams

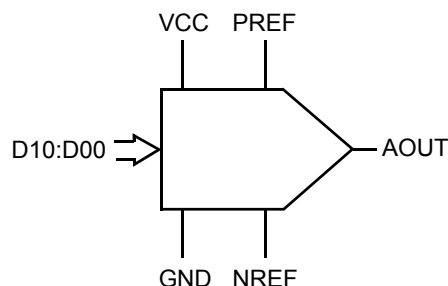**SCHEMATIC SYMBOL**

- ❑ Aeroflex Plainview's Radiation Hardness Assurance Plan is DLA Certified to MIL-PRF-38534, Appendix G.

GENERAL DESCRIPTION

The Aeroflex 11-Bit DAC is a standard CMOS R/2R Kelvin resistor network. The digital inputs, D10(MSB) through D00(LSB), are buffered to drive single-pole double-throw CMOS switches to apply either the PREF or NREF signals to the 2R legs of the resistor network. The output is unbuffered.

PREF and NREF inputs can be any static or dynamic voltage within the power supply range. The nominal values of R and 2R are 5K and 10K respectively. The characteristic impedance of the resistor network is approximately 5K.

The voltage-output configuration of the integrated circuit can be thought of as a digitally controlled voltage with a value of $\text{PREF} \cdot \text{NREF}$ and an output impedance of approximately 5K. The output will swing rail-to-rail if unloaded.

The DAC can also be operated in the so-called "inverted" mode where any voltage between the power rails can be applied to the output and currents into a very low impedance (operational amplifier summing junction for example) can be obtained from the PREF and NREF ports. The sum of the currents is constant and the proportion at PREF and NREF is controlled by the digital input number.

Applications include digital potentiometers, programmable voltage sources and a large variety of other circuits that can be found in many industry references.

ABSOLUTE MAXIMUM RATINGS

Parameter	Range	Units
Case Operating Temperature Range	-55 to +125	°C
Storage Temperature Range	-65 to +150	°C
Junction Temperature	+150	°C
Lead Temperature (soldering, 10 seconds)	300	°C
Thermal Resistance, Junction to Case, θ_{jc}	7	°C/W
Supply Voltage +VCC	+6.0	V
PREF relative to NREF	+6.0	V
Digital Input Voltage	VCC +0.4 GND -0.4	V
ESD Rating (MIL-STD-883, Method 3015, Class 2)	2,000 - 3,999	V
Power @25°C	200	mW

NOTICE: Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress rating only; functional operation beyond the "Operation Conditions" is not recommended and extended exposure beyond the "Operation Conditions" may affect device reliability.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Typical	Units
+VCC	Power Supply Voltage	3.3 to 5.0	V

ELECTRICAL PERFORMANCE CHARACTERISTICS (Tc = -55°C to +125°C, +Vcc = +5.0V -- Unless otherwise specified)

Parameter	Symbol	Conditions	Min	Max	Units
Resolution ^{2/}	N			11	Bits
Supply Current	ICC	Toggle inputs, Vcc, GND		1	mA
Quiescent current	ICCQ	All inputs = Vcc		1	mA
Relative Accuracy	RA	PREF = Vcc, NREF = GND		0.25	% of FSR
Gain Error	AE	PREF = Vcc, NREF = GND		0.55	% of FSR
Offset Error	OFF ₂	PREF = 4.9 V, NREF = 0.1 V		0.25	% of FSR
Differential Nonlinearity	DNL	PREF = Vcc, NREF = GND		0.25	% of FSR
Output Settling Time	TD	All inputs = Gnd to Vcc, PREF = 4.9 V, NREF = 0.1 V, Output = 1/2 LSB of Nominal		3	us
PREF Input Z	ZP		3	7	kΩ
NREF Input Z	ZR		3	7	kΩ
Input High Voltage	VIH	PREF = 4.9 V, NREF = 0.1 V	3.5		V
Input Low Voltage	VIL	PREF = 4.9 V, NREF = 0.1 V		1.5	V
Input High Leakage ^{3/}	IiH	Input under test = GND		1	nA
Input Low Leakage ^{3/}	IiL	Input under test = Vcc		1	nA


Note: 1/ Specification derated to reflect Total Dose exposure to 1 Mrad(Si) @ +25°C.

2/ Not Tested. Shall be guaranteed by design, characterization, or correlation to other test parameters.

3/ Not Tested.

Package Pin #s	Signal	Definitions
1	PREF	Positive Analog Voltage Reference.
2	NREF	Negative Analog Voltage Reference
3	GND	- Voltage Supply
4	D10	Digital Bit 10 (MSB)
5	D09	Digital Bit 09
6	D08	Digital Bit 08
7	D07	Digital Bit 07
8	D06	Digital Bit 06
9	D05	Digital Bit 05
10	D04	Digital Bit 04
11	D03	Digital Bit 03
12	D02	Digital Bit 02
13	D01	Digital Bit 01
14	D00	Digital Bit 00 (LSB)
15	VCC	+ Voltage Supply
16	AOUT	Analog Output


PINOUT DESCRIPTIONS

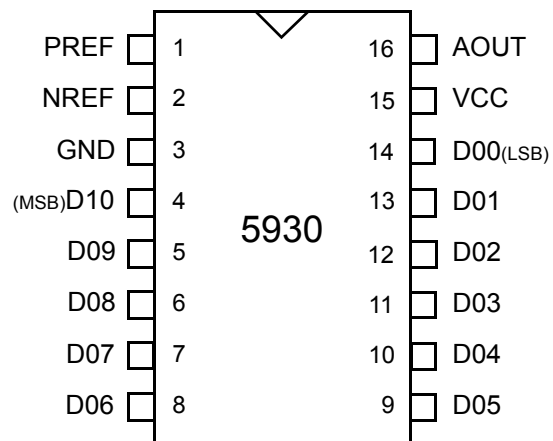

PACKAGE PINOUT

ORDERING INFORMATION

Model	DLA SMD #	Screening	Package
RHD5930-7	-	Commercial Flow, +25°C testing only	16-pin SOIC Package
RHD5930-S	-	Military Temperature, -55°C to +125°C Screened in accordance with the individual Test Methods of MIL-STD-883 for Space Applications	
RHD5930-201-1S	5962-1120801KXC	In accordance with DLA SMD	
RHD5930-201-2S	5962-1120801KXA		
RHD5930-901-1S	5962H1120801KXC	DLA SMD and Radiation Certification Pending	
RHD5930-901-2S	5962H1120801KXA		

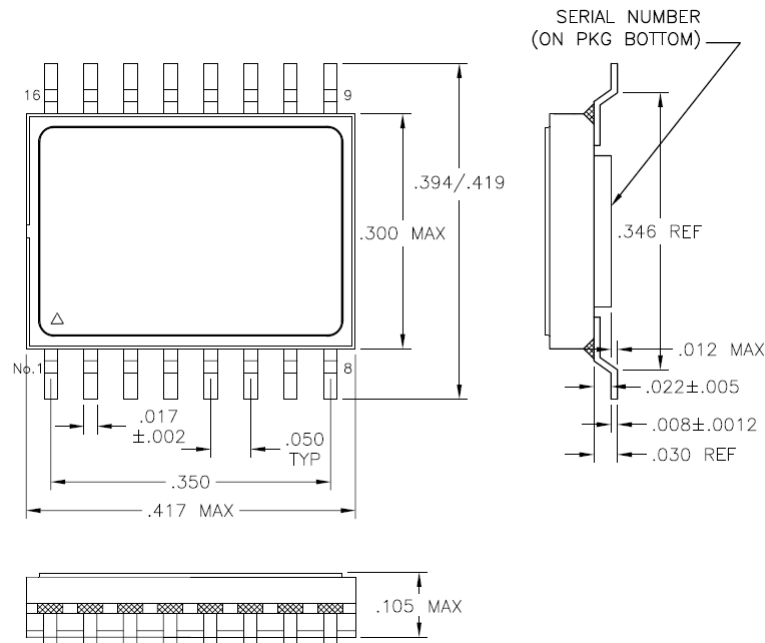

PACKAGE OUTLINE

EXPORT CONTROL:

This product is controlled for export under the International Traffic in Arms Regulations (ITAR). A license from the U.S. Department of State is required prior to the export of this product from the United States.

EXPORT WARNING:

Aeroflex's military and space products are controlled for export under the International Traffic in Arms Regulations (ITAR) and may not be sold or proposed or offered for sale to certain countries. (See ITAR 126.1 for complete information.)

PLAINVIEW, NEW YORK
Toll Free: 800-THE-1553
Fax: 516-694-6715

INTERNATIONAL
Tel: 805-778-9229
Fax: 805-778-1980

NORTHEAST
Tel: 603-888-3975
Fax: 603-888-4585

SE AND MID-ATLANTIC
Tel: 321-951-4164
Fax: 321-951-4254

WEST COAST
Tel: 949-362-2260
Fax: 949-362-2266

CENTRAL
Tel: 719-594-8017
Fax: 719-594-8468

www.aeroflex.com info-ams@aeroflex.com

Aeroflex Microelectronic Solutions reserves the right to change at any time without notice the specifications, design, function, or form of its products described herein. All parameters must be validated for each customer's application by engineering. No liability is assumed as a result of use of this product. No patent licenses are implied.



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused