



## RLT415-50CMG

- Violet Radiation Source
- 415 nm  $\pm$  2nm
- 50 mW CW
- 5.6mm TO, without PD



Complies with RoHS 2002/95/WE directive

### Description

**RLT415-50CMG** is an Violet Laser Diode emitting at 415 nm with rated output power of 50 mW CW at room temperature, in standard 5.6mm TO package.

### Maximum Ratings

Parameter	Symbol	Values		Unit
		Min.	Max.	
Optical Output Power	$P_O$		50	mW
Operating Temperature	$T_{CASE}$	+ 10	+ 30	°C
Storage Temperature	$T_{STG}$	- 40	+ 80	°C
Soldering Temperature	$T_{SOLDER}$		260	°C

### Laser Characteristics ( $T_{CASE} = 25^{\circ}\text{C}$ , $P_O = 50\text{ mW}$ )


Parameter	Symbol	Values			Unit
		Min.	Typ.	Max.	
Emission Wavelength	$\lambda_{peak}$	413	415	417	nm
Spectral Width	$\Delta\lambda$		0.5	1	nm
Polarization			TE		
Threshold Current	$I_{th}$	40	70	100	mA
Operating Current	$I_F$	100	120	150	mA
Operating Voltage	$V_F$	4.8	5.2	5.9	V
Beam Divergence (FWHM)	$\theta_{  } \times \theta_{\perp}$	6x15	10x20	13x25	deg.
Beam Pointing Accuracy (FWHM)	$\Delta\theta_{  } / \Delta\theta_{\perp}$	8 / 18	-	14 / 25	deg.
Slope Efficiency	$\eta$	0.5	0.7	1.2	W/A
Expected Life Time*	$T_L$		2000		h

\*life time calculation based on 10mW operation




## Performance Characteristics


Output Power vs. Forward Current

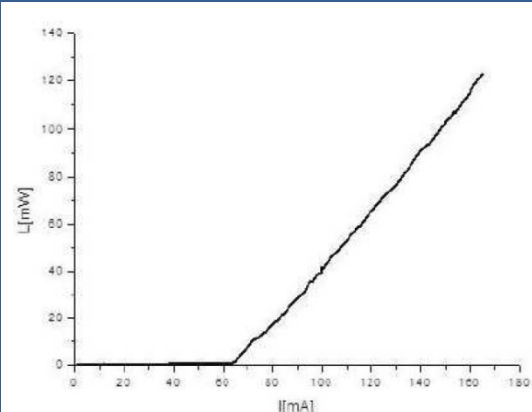

Forward Voltage vs. Forward Current

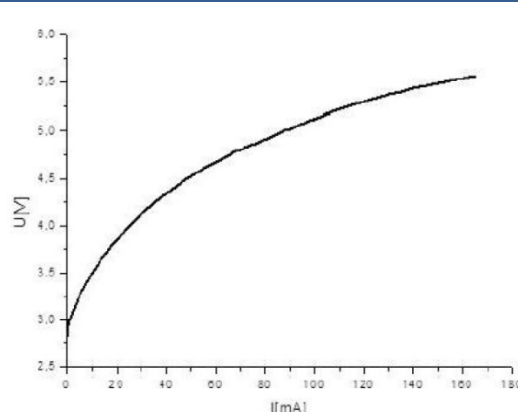


Near Field Pattern

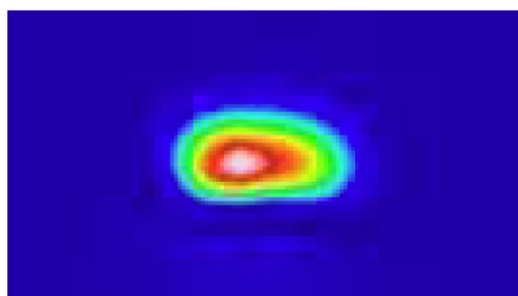


Beam diameter 1.3x2.0mm @ 20cm distance

Spectrum

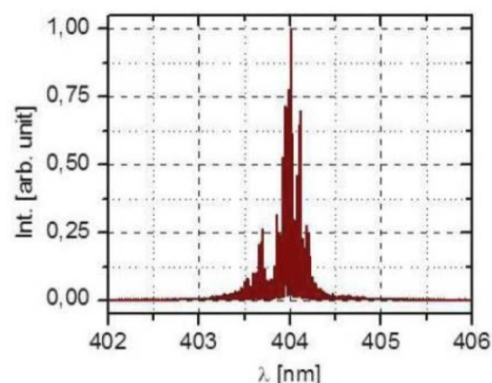

spectrum recorded from RLT405-50CMG

## Drawing

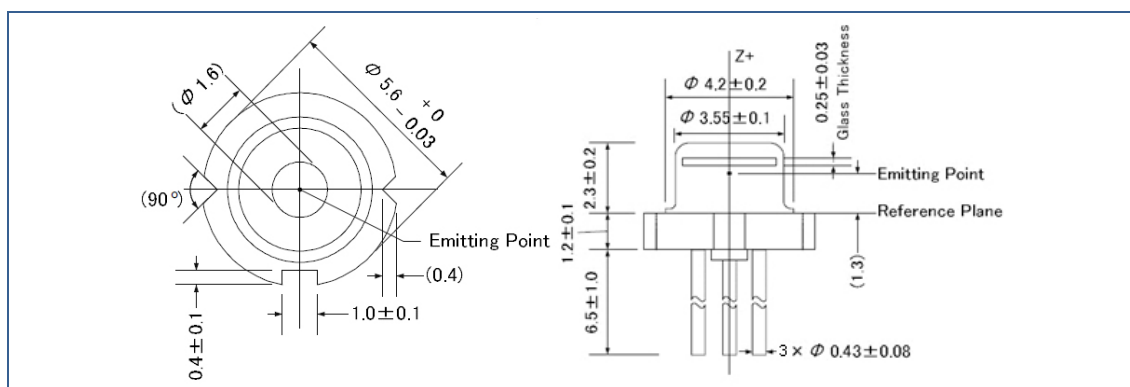


Dimensions in mm



## Electrical Connection

Lead	Description	
Pin 1	LD Anode	
Pin 2	LD Cathode	
Pin 3	Not connected	

View from below, dimensions in mm

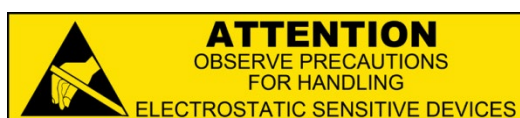


## Mounting Instruction

In order to maintain lifetime and stability of the laser diode it is essential to provide efficient heat management. Heat dissipation is possible through the base plate only. For long time stable operation proper contact between laser diode base plate and heat sink is mandatory.

## Safety Advice

This laser diode emits highly concentrated ultra violet light which can be **hazardous to the human eye**. This diode is classified as **Class 3B laser product** according to **IEC 60825-1** and **21 CFR Part 1040.10 Safety Standards**. Actual laser light emitted and precautions necessary strongly depend on mode of operation.

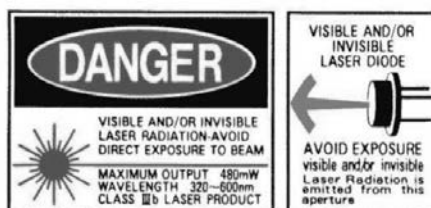

This product is comply with 21 CFR Part 1040.10