

Surface Mount Voltage Controlled Oscillator

ROS-1700W+ ROS-1700W

Wide Band 770 to 1700 MHz

Features

- very wide band, 770 to 1700 MHz
- linear tuning sensitivity, 26-60 MHz/V typ.
- low phase noise, -140 dBc/Hz at 1 MHz offset, typ.
- aqueous washable

Applications

- test equipment
- cellular
- instrumentation



CASE STYLE: CK605

PRICE: \$24.95 ea. QTY (5-49)

**+ RoHS compliant in accordance
with EU Directive (2002/95/EC)**

The +Suffix identifies RoHS Compliance. See our web site
for RoHS Compliance methodologies and qualifications.

Electrical Specifications

FREQUENCY (MHz)		POWER OUTPUT (dBm)	TUNING VOLTAGE (V)		PHASE NOISE (dBc/Hz) SSB at offset frequencies: Typ.				PULLING pk-pk @ 12 dB (MHz)	PUSHING (MHz/V)	TUNING SENSITIVITY (MHz/V)	HARMONICS (dBc)		3 dB MODULATION BANDWIDTH (MHz)	DC OPERATING POWER	
Min.	Max.	Typ.	Min.	Max.	1 kHz	10 kHz	100 kHz	1 MHz	Typ.	Typ.	Typ.	Typ.	Max.	Typ.	Vcc (volts)	Current (mA) Max.
770	1700	8.0	1.0	24	-73	-100	-121	-140	9.0	0.4	26-60	-25	-13	11.0	12	40

Pin Connections


RF OUT	10
VCC	14
V-TUNE	2
GROUND	1,3,4,5,6,7,8,9,11,12,13,15,16

Maximum Ratings

Operating Temperature	-55°C to 85°C
Storage Temperature	-55°C to 100°C
Absolute Max. Supply Voltage (Vcc)	+15V
Absolute Max. Tuning Voltage (Vtune)	+30V

all specifications: 50 ohm system
Permanent damage may occur if any of these limits are exceeded.


Outline Drawing

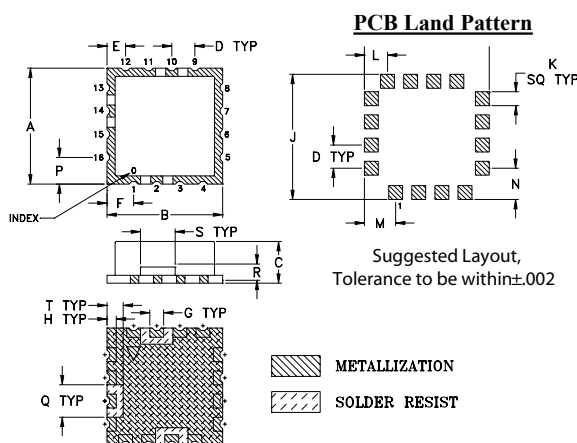

Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	H	J	K	L	M	N	P	Q	R	S	T	wt.
.500	.500	.180	.100	.080	.115	.060	.040	.540	.060	.100	.135	.135	.115	.140	.070	.150	.070	grams
12.70	12.70	4.57	2.54	2.03	2.92	1.52	1.02	13.72	1.52	2.54	3.43	3.43	2.92	3.56	1.78	3.81	1.78	1.0

Demo Board MCL P/N: TB-10 Suggested PCB Layout (PL-012)

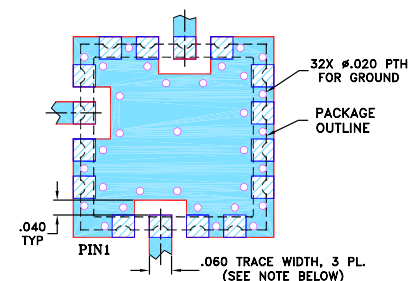

- NOTES: 1. TRACE WIDTH IS SHOWN FOR FR4 WITH DIELECTRIC THICKNESS .030" ± .002"; COPPER: 1/2 OZ. EACH SIDE. FOR OTHER MATERIALS TRACE WIDTH MAY NEED TO BE MODIFIED.
2. BOTTOM SIDE OF THE PCB IS CONTINUOUS GROUND PLANE.

- DENOTES PCB COPPER LAYOUT WITH SMOBC (SOLDER MASK OVER BARE COPPER)
■ DENOTES COPPER LAND PATTERN FREE OF SOLDER MASK

Mini-Circuits®
ISO 9001 ISO 14001 AS 9100 CERTIFIED

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at minicircuits.com

IF/RF MICROWAVE COMPONENTS


Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site



REV. C
M102713
ED-4628
ROS-1700W
MM/TD/CP/AM
090826
Page 1 of 2

Performance Data & Curves


ROS-1700W+ ROS-1700W

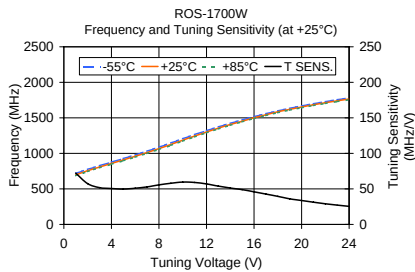

V TUNE	TUNING SENS. (MHz/V)	FREQUENCY (MHz)			POWER OUTPUT (dBm)		
		-55°C	+25°C	+85°C	-55°C	+25°C	+85°C
1.00	72.21	717.99	698.31	686.70	9.87	9.61	9.21
2.00	57.41	774.24	755.73	744.68	9.93	9.54	9.14
3.00	51.80	825.68	807.53	796.55	9.92	9.54	9.07
4.00	50.48	876.46	858.01	846.82	9.85	9.54	9.14
5.00	49.81	926.86	907.82	896.43	10.03	9.57	9.09
6.00	50.92	978.23	958.74	946.84	10.14	9.65	9.09
7.00	52.81	1031.26	1011.54	999.24	10.30	9.69	9.10
8.00	55.62	1087.44	1067.16	1054.55	10.27	9.60	9.03
9.00	57.92	1146.06	1125.08	1112.31	10.25	9.54	8.95
10.00	59.59	1205.42	1184.67	1172.03	10.19	9.45	8.79
11.00	59.04	1263.98	1243.71	1231.35	10.05	9.27	8.62
12.00	56.99	1319.63	1300.70	1289.01	9.80	9.09	8.43
13.00	53.96	1372.27	1354.66	1343.65	9.53	8.87	8.22
14.00	51.27	1422.56	1405.93	1395.45	9.20	8.57	7.96
15.00	48.93	1471.01	1451.86	1444.45	8.93	8.32	7.71
16.00	45.89	1516.40	1500.75	1490.55	8.64	8.03	7.45
17.00	42.66	1558.84	1543.41	1533.21	8.30	7.75	7.24
18.00	39.47	1597.98	1585.88	1572.71	8.02	7.57	7.05
19.00	36.01	1633.81	1618.89	1608.74	7.73	7.28	6.79
20.00	33.62	1667.41	1652.51	1642.26	7.46	7.05	6.58
21.00	31.30	1698.53	1683.81	1673.57	7.27	6.87	6.38
22.00	29.01	1727.54	1712.82	1702.64	6.97	6.64	6.23
23.00	27.20	1754.81	1740.02	1729.73	6.81	6.37	5.96
24.00	25.41	1780.22	1765.43	1755.05	6.66	6.25	5.80

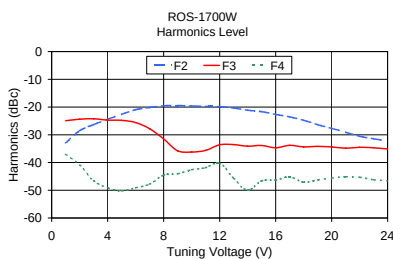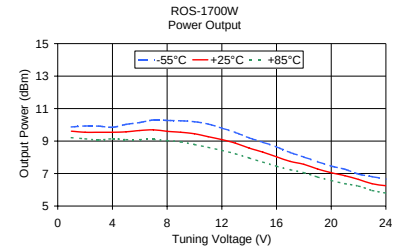

V TUNE	HARMONICS (dBc)			FREQ. PUSHING (MHz/V)
	F2	F3	F4	
1.00	-32.97	-24.94	-37.01	0.44
2.00	-28.53	-24.38	-40.92	0.45
3.00	-26.31	-24.24	-46.58	0.47
4.00	-24.39	-24.70	-49.09	0.47
5.00	-22.59	-24.80	-50.20	0.46
6.00	-20.94	-25.58	-49.09	0.47
7.00	-20.15	-27.83	-47.77	0.51
8.00	-19.53	-31.49	-44.55	0.57
9.00	-19.44	-35.77	-44.03	0.54
10.00	-19.61	-36.21	-42.59	0.49
11.00	-19.74	-35.63	-41.85	0.31
12.00	-19.84	-33.60	-40.22	0.15
13.00	-20.33	-33.52	-45.70	0.04
14.00	-21.14	-34.10	-49.94	0.05
15.00	-21.65	-33.86	-46.61	0.11
16.00	-22.64	-34.68	-46.33	0.16
17.00	-23.53	-33.82	-45.14	0.19
18.00	-24.77	-34.36	-47.10	0.23
19.00	-26.34	-34.18	-46.26	0.27
20.00	-27.68	-34.39	-45.61	0.29
21.00	-29.10	-34.85	-45.12	0.32
22.00	-30.55	-34.50	-45.32	0.32
23.00	-31.41	-34.70	-46.21	0.31
24.00	-32.25	-35.12	-46.58	0.29

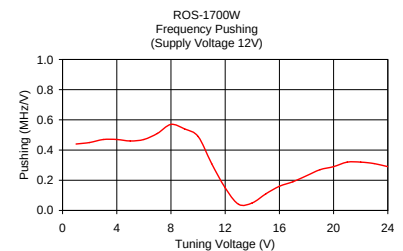

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 **ISO 9001 ISO 14001 AS 9100 CERTIFIED** The Design Engineers Search Engine **Provides ACTUAL Data Instantly at minicircuits.com**

IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp.

For detailed performance specs
& shopping online see web site