


DC COMPONENTS CO., LTD.

RECTIFIER SPECIALISTS

**RS1AG
THRU
RS1MG**
TECHNICAL SPECIFICATIONS OF SURFACE MOUNT FAST RECOVERY RECTIFIER
VOLTAGE RANGE - 50 to 1000 Volts
CURRENT - 1.0 Ampere
FEATURES

- * Ideal for surface mounted applications
- * Low leakage current
- * Glass passivated junction

MECHANICAL DATA



- * Case: Molded plastic
- * Epoxy: UL 94V-0 rate flame retardant
- * Terminals: Solder plated, solderable per MIL-STD-750, Method 2026
- * Polarity: As marked
- * Mounting position: Any
- * Weight: 0.064 gram

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

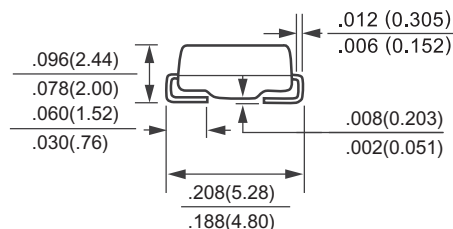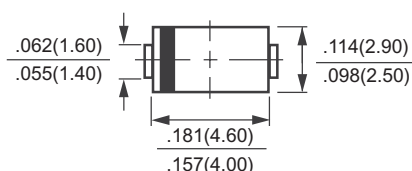
SMA (DO-214AC)


Dimensions in inches and (millimeters)

		SYMBOL	RS1AG	RS1BG	RS1DG	RS1GG	RS1JG	RS1KG	RS1MG	UNITS
Maximum Recurrent Peak Reverse Voltage		VRRM	50	100	200	400	600	800	1000	Volts
Maximum RMS Voltage		VRMS	35	70	140	280	420	560	700	Volts
Maximum DC Blocking Voltage		VDC	50	100	200	400	600	800	1000	Volts
Maximum Average Forward Rectified Current at TA = 55°C		Io	1.0							Amps
Peak Forward Surge Current 8.3 ms single half sine-wave superimposed on rated load (JEDEC Method)		IFSM	30							Amps
Maximum Forward Voltage at 1.0A DC		VF	1.3							Volts
Maximum DC Reverse Current at	@TA = 25°C	IR	5.0							uAmps
Rated DC Blocking Voltage	@TA = 125°C		150							
Maximum Reverse Recovery Time (Note 3)		trr	150				250	500		nSec
Maximum Thermal Resistance (Note 2)		RθJL	30							°C/W
Typical Junction Capacitance (Note 1)		CJ	15							pF
Operating and Storage Temperature Range		TJ, TSTG	-65 to + 175							°C

NOTES : 1. Measured at 1.0 MHz and applied reverse voltage of 4.0VDC

 2. Thermal Resistance (Junction to Ambient), .24in² (6.0mm²) copper pads to each terminal.

3. Test Conditions: IF = 0.5A, IR = 1.0A, IRR = 0.25A

RATING AND CHARACTERISTIC CURVES (RS1AG THRU RS1MG)

FIG. 1 - TYPICAL FORWARD CURRENT DERATING CURVE

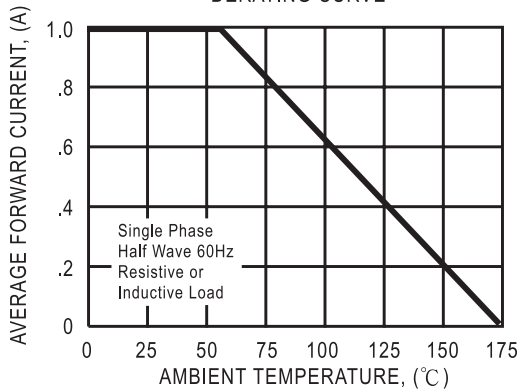


FIG. 2 - MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

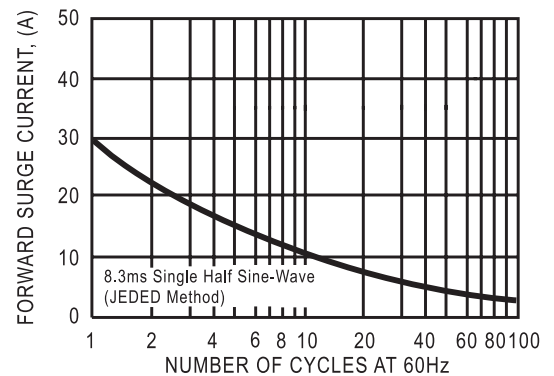


FIG. 3 - TYPICAL REVERSE CHARACTERISTICS

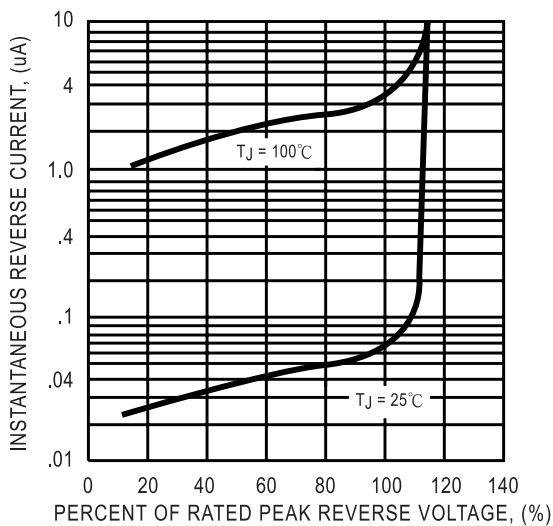


FIG. 4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS


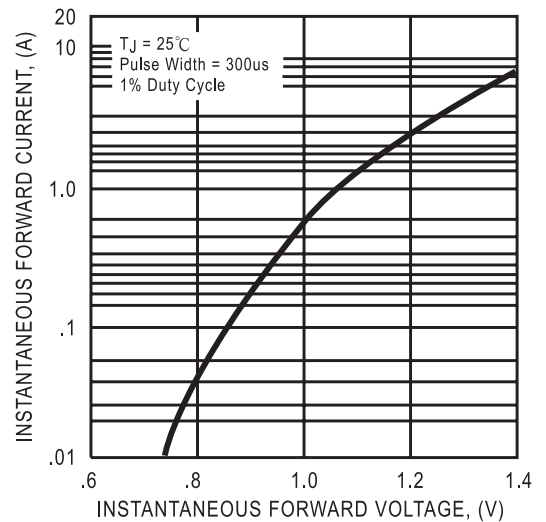


FIG. 5 - TEST CIRCUIT DIAGRAM AND REVERSE RECOVERY TIME CHARACTERISTIC

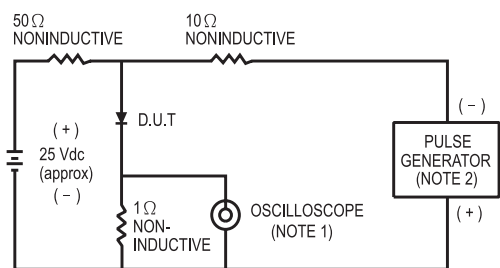

NOTES: 1. Rise Time = 7ns max. Input Impedance = 1 megohm. 22 pF.
2. Rise Time = 10ns max. Source Impedance = 50 ohms.





FIG. 6 - TYPICAL JUNCTION CAPACITANCE

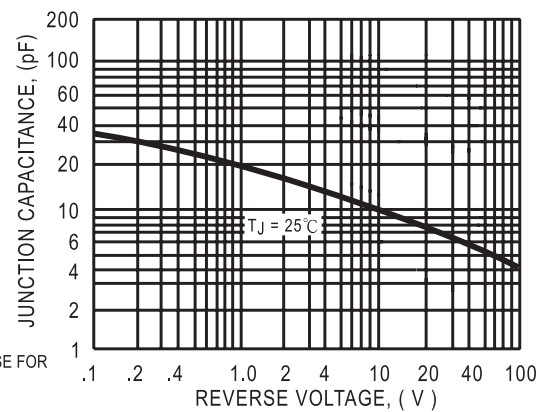

DC COMPONENTS CO., LTD.