


RT19264C-1SR(L)(F)B

*192X64Dot *1/64D * YELLOW mode STN Transflective *+5V single power supply *

EXTERNAL DIMENSIONS AND DISPLAY PATTERN

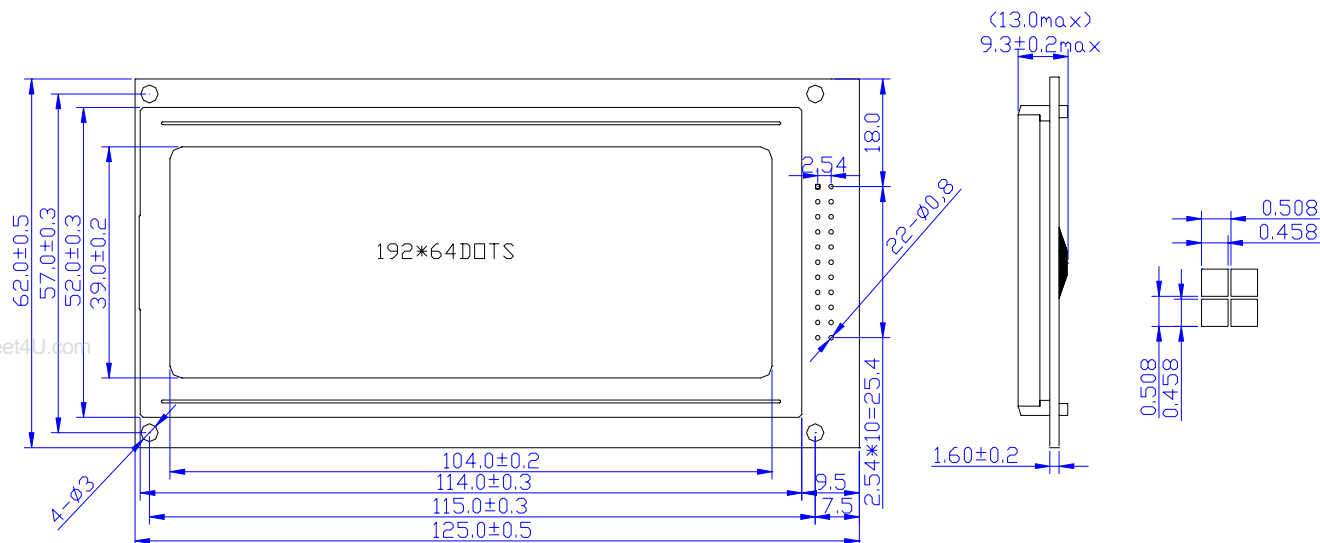

MECHANICAL DATA (Nominal dimensions)

module size ----- 125.0Wx62.0Hx9.5(13.0)D mm
Effective display area-----104.0Wx39.0H mm
Dot size-----0.458Wx0.458H mm
Dots pitch-----0.508Wx0.508H mm
Weight ----- about 80 g


ABSOLUTE MAXIMUM RATINGS

	min	max
Power supply voltage(Vdd-Vss)-----	0	6.7V
Power supply for LCD-dirve(Vdd-Vo) ----		13.0V
Input voltage(Vi) -----	Vss	Vdd
Operating temperature(Ta) -----	0	60°C
Stroage temperature(Tstg) -----	-10	70°C

ELECTRICAL CHARACTERISTICS

Ta=25°C, Vdd=5.0V+0.25V
Input 'high' voltage(ViH) ----- 3.5Vmin
Input 'low' voltage(ViL) ----- 0.3Vdd
Power supply current(Idd)(Vdd=5.0V)----2.51mAmax
Drive method ----- 1/64Duty

BLOCK DIAGRAM

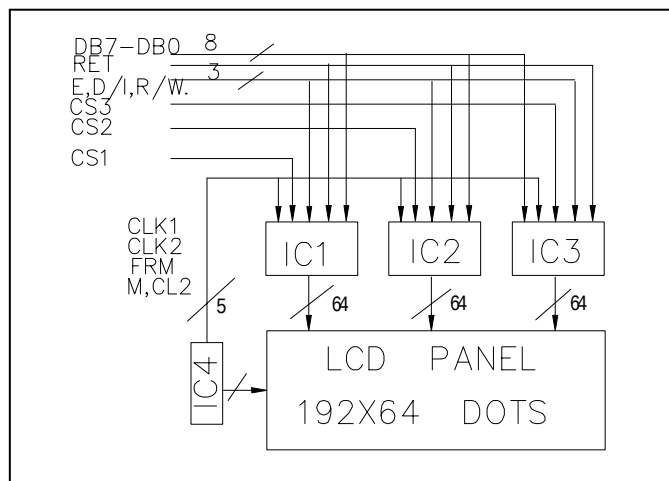

PIN CONNECTION

Pin No.	Symbol	Level	Function
1	VSS	0V	0V
2	VDD	5.0V	+5V
3	Vo	--	Operating Voltage for Lcd (variable)
4	RS	H/L	L:Instruction.code input H:Data input
5	R/W	H/L	H:Data read L:Data write
6	E	H,H→L	Enable signal
7	D0	H/L	Data bus line *
8	D1	H/L	
9	D2	H/L	
10	D3	H/L	
11	D4	H/L	
12	D5	H/L	
13	D6	H/L	
14	D7	H/L	
15	CS1	L	Chip select singal
16	CS2	L	Chip select singal
17	CS3	L	Chip select singal
18	RESET	L	RESET singal
19	Vo	-6V	Negative Voltage for LCD driving
20	LED-		
21	LED+	+5.0V	The LED supply*