

Preliminary 10W Power Transistor

RT240PD


RFHIC

Product Features

- High Output Power
P1dB = 40dBm(Typ.)@2.14GHz
- High Efficiency
- High Power Gain
G1dB = 17dB(Typ.)@900MHz
G1dB = 13dB(Typ.)@2.14GHz
- High Linearity
- Hermetically sealed package
- GaN HFET

Application

- Repeater
- RF Sub-Systems
- Base Station
- Converter
- IMT-2000
- ISM
- MMDS
- Wi-Fi, Wi-max



Description

The RT240PD is designed for base stations and cell extenders as cellular and GSM, PCS, IMT-2000, ISM, MMDS, Wi-Fi, Wi-MAX frequency systems, GaN HFET is used and attached on a gold sub carrier.

● Typical Specifications

Parameter	Specifications				
Frequency (MHz)	900	1800	2140	2640	3500
Small Signal Gain (dB)	17	14	13	12	10
VSWR (Input / Output)	2.0 : 1				
1dB Compression Point (dBm)	40			39	
*CDMA Power (1FA) (dBm)	33	33			
*CDMA Power (7FA) (dBm)	29	29			
Vdd / Ids (CDMA Only)	+28V / 600mA				
**WCDMA Power (1FA) (dBm)			31		
**WCDMA Power (2FA) (dBm)			28		
**WCDMA Power (4FA) (dBm)			26		
OIP3 (dBm)	50 @ 27dBm/tone			48 @ 27dBm/tone	
Operating Temp Range	-25℃ ~ +70℃				

* IS-95 (±750kHz offset@-29dBc ACPR, ±1.98MHz offset@-39dBc ACPR)

** Test Model 1ch/64DPCH (±5MHz offset@-45dBc ACLR, ±10MHz offset@-50dBc ACLR)


- All specifications may change without notice.
- www.rfhic.com

Preliminary 10W Power Transistor

RT240PD

RFHIC

Test Circuit Board

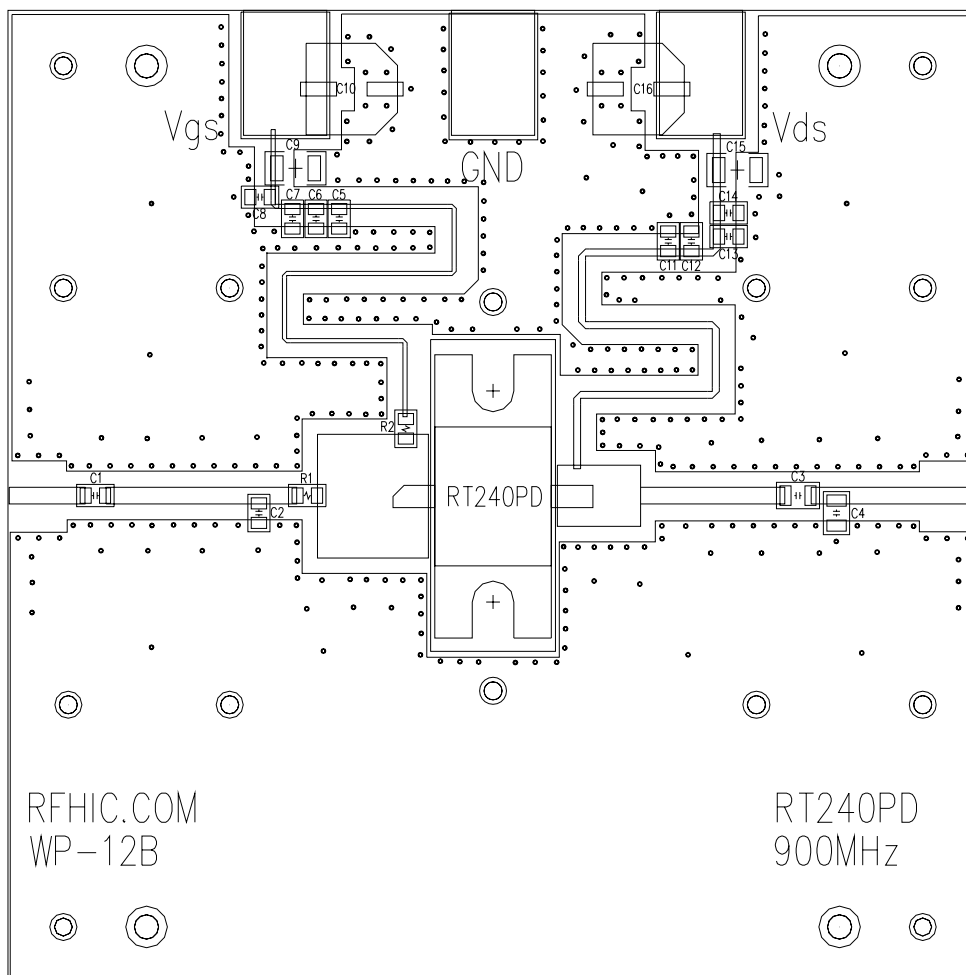


- All specifications may change without notice.
- www.rfhic.com

Preliminary 10W Power Transistor


RT240PD




● Measure Data (900MHz)

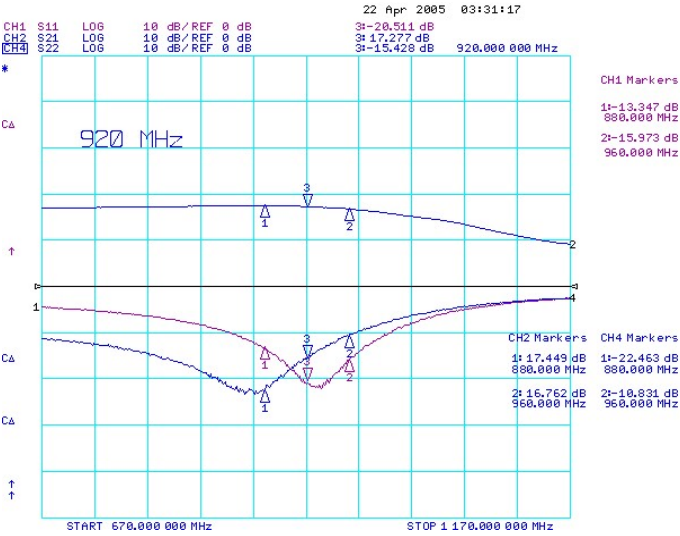


(S-Parameter)

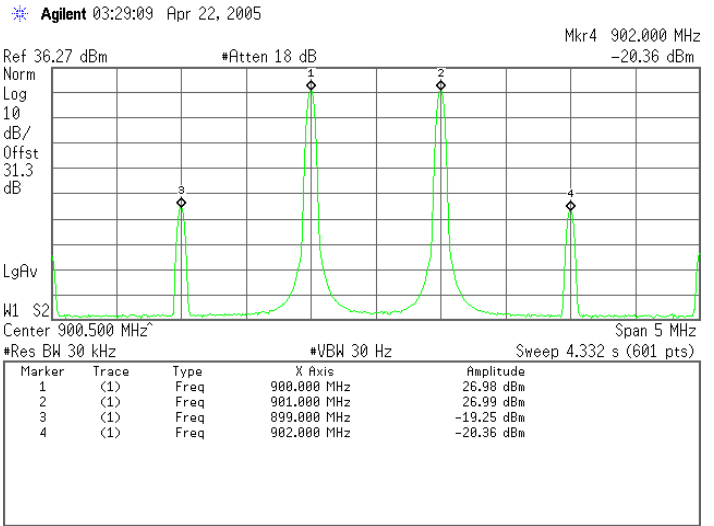

(OIP3)

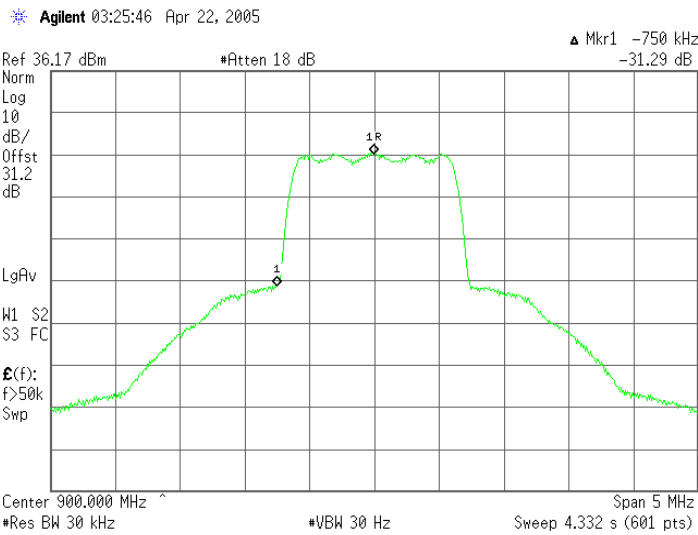

(CDMA 1FA 33dBm @ -750kHz offset)

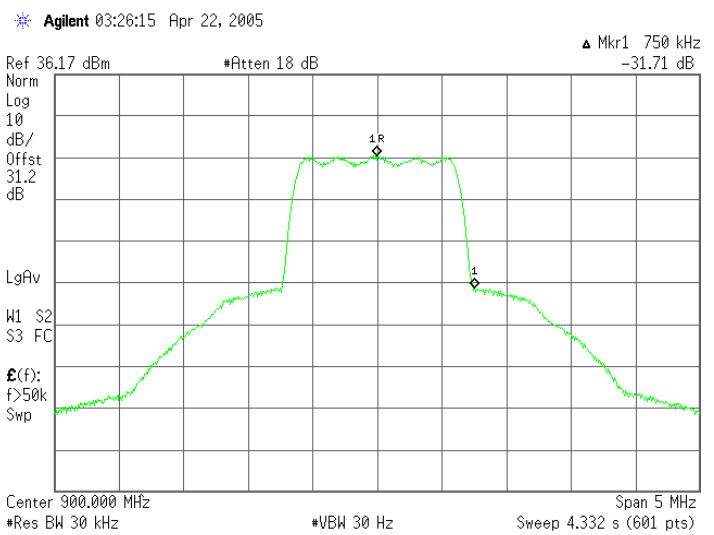


(CDMA 1FA 33dBm @ +750kHz offset)

Preliminary 10W Power Transistor

RT240PD


RFHIC

* Agilent 03:26:50 Apr 22, 2005

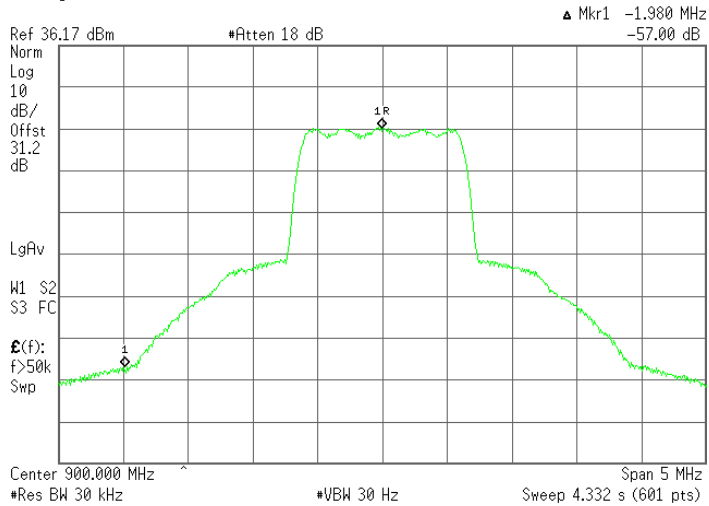


(CDMA 1FA 33dBm @ -1.98MHz offset)

* Agilent 03:27:14 Apr 22, 2005

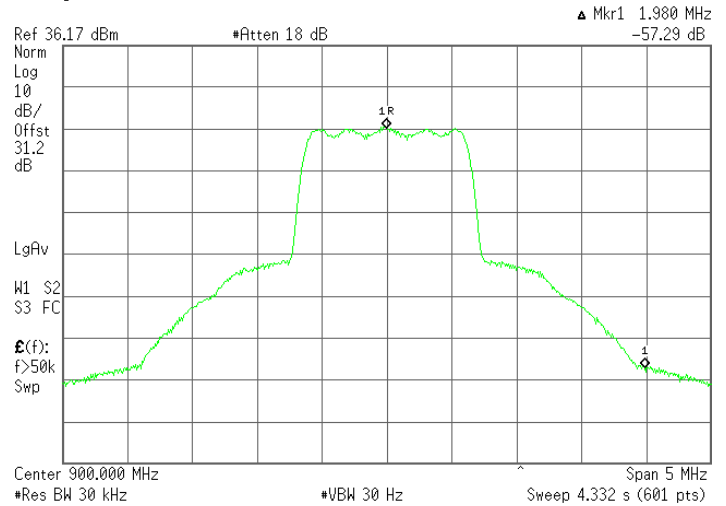


(CDMA 1FA 33dBm @ +1.98MHz offset)

* Agilent 03:21:15 Apr 22, 2005

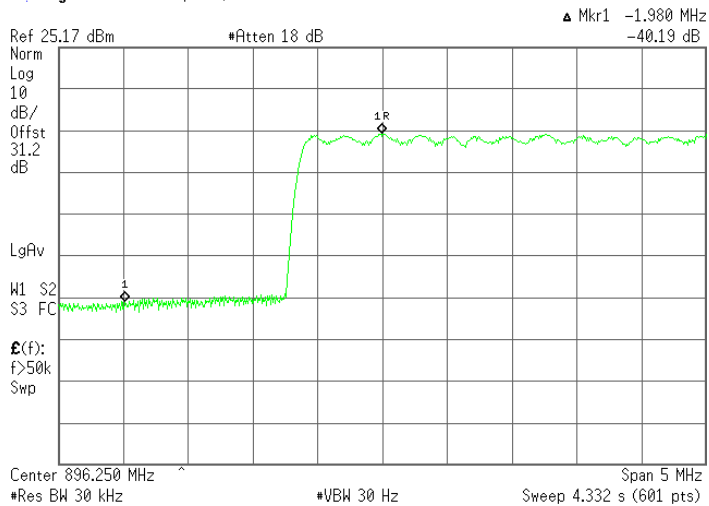

(CDMA 7FA 29dBm @ -1.98MHz offset)

* Agilent 03:21:43 Apr 22, 2005

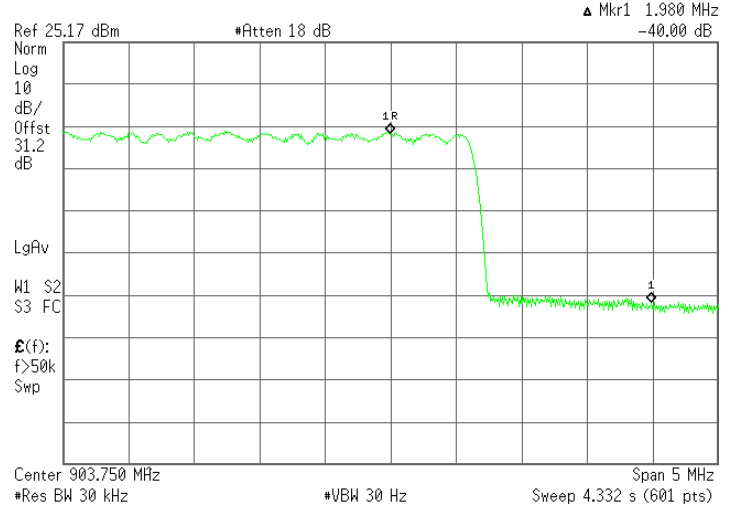


(CDMA 7FA 29dBm @ +1.98MHz offset)

- All specifications may change without notice.
- www.rfhic.com

● Application Circuit (2.14GHz)

Schematic

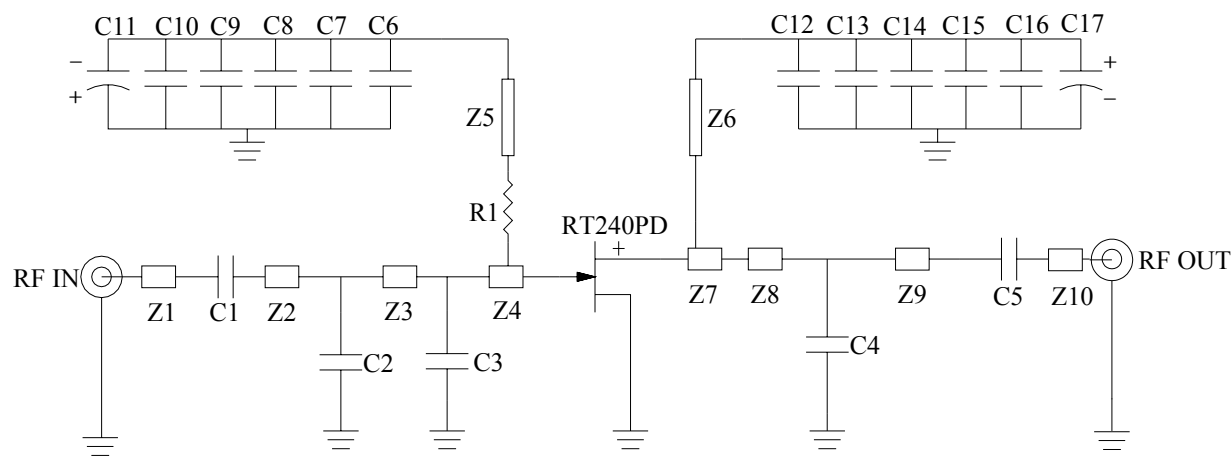

Typical Specifications	
Frequency	2110 ~ 2170MHz
Gain(S21)	13.5dB
Return loss(S11)	-13dB
Return loss(S22)	-17dB
OIP3(@27dBm/tone)	51dBm
*WCDMA(1FA)	31dBm
*WCDMA(2FA)	28dBm
*WCDMA(4FA)	26dBm
P1dB	41dBm
Test Conditions	V _{ds} =+28V, I _{dq} =600mA, T _C =25 °C

* Test Model 1ch/64DPCH
(±5MHz offset@-45dBc, ±10MHz offset@-50dBc ACLR)

Bill of Material					
Text	Value	Size(mm)	Text	Value	Size(mm)
C1	5pF	1608	C9,C15	100nF	1608
*C2	2pF		***C4	2pF	2012
**C3	1pF		C5	10pF	
C6,C12	10pF		C10,C16	1uF	3216
C7,C13	100pF		C11,C17	22uF/+50V	
C8,C14	1nF		R1	100Ω	1608
Z1	W × L	1.4 × 4.9	Z6	W × L	0.7 × 18.5
Z2		1.4 × 1.8	Z7		4.5 × 6.1
Z3		1.4 × 11.1	Z8		1.4 × 2.2
Z4		9.0 × 8.1	Z9		1.4 × 13.2
Z5		0.5 × 18.5	Z10		1.4 × 3.7
PCB	FR-4, 0.8mm, , er=4.7				


* S11 & Gain Tuning Point
** S11 Tuning Point
*** S22, Gain & OIP3, P1dB Tuning Point

● All specifications may change without notice.
● www.rfhic.com

Preliminary 10W Power Transistor

RT240PD**RFHIC**

Test Circuit Board

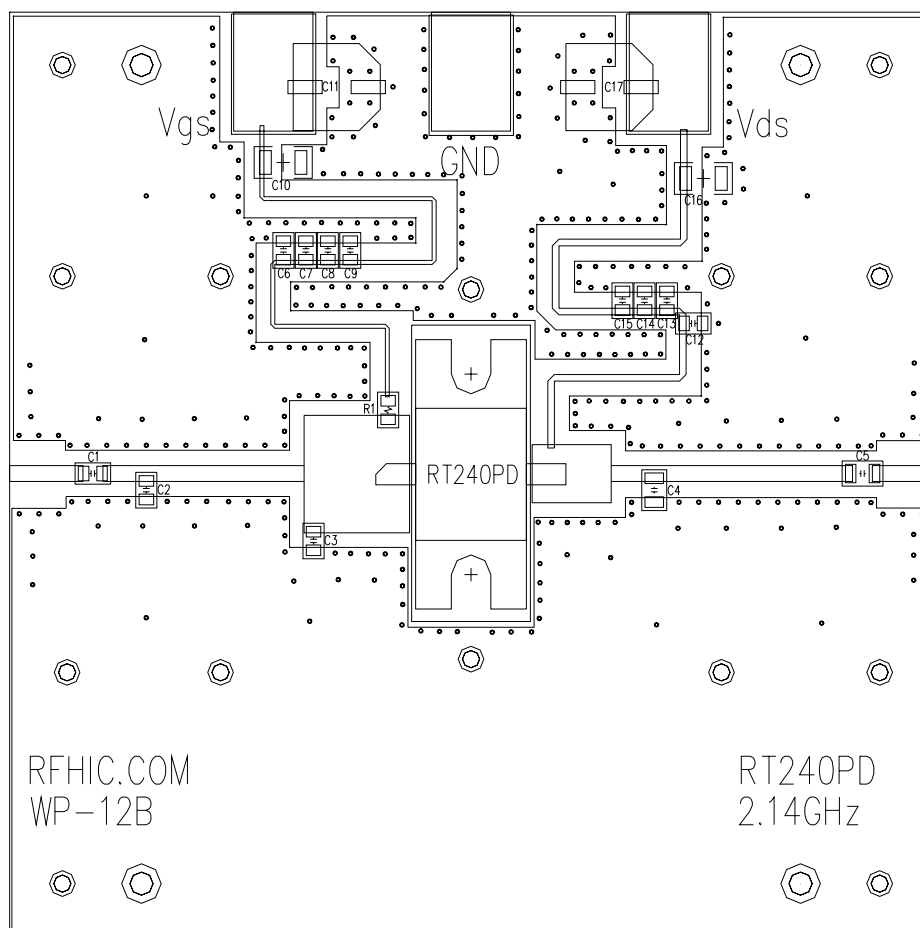


- All specifications may change without notice.
- www.rfhic.com

Preliminary 10W Power Transistor


RT240PD

RFHIC

● Measure Data (2.14GHz)

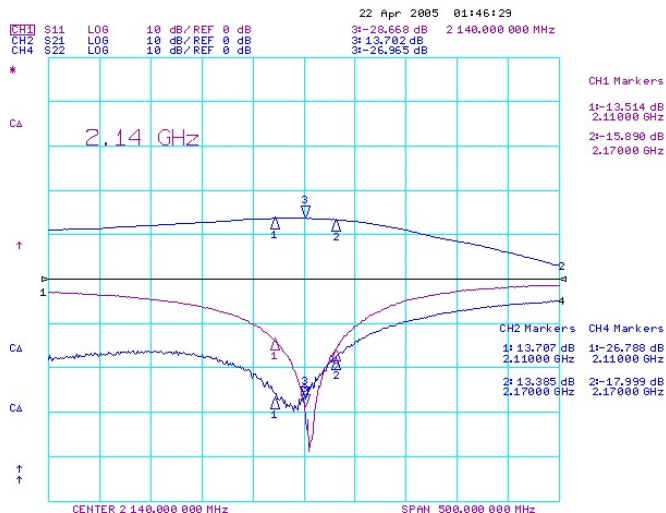


(S-Parameter)

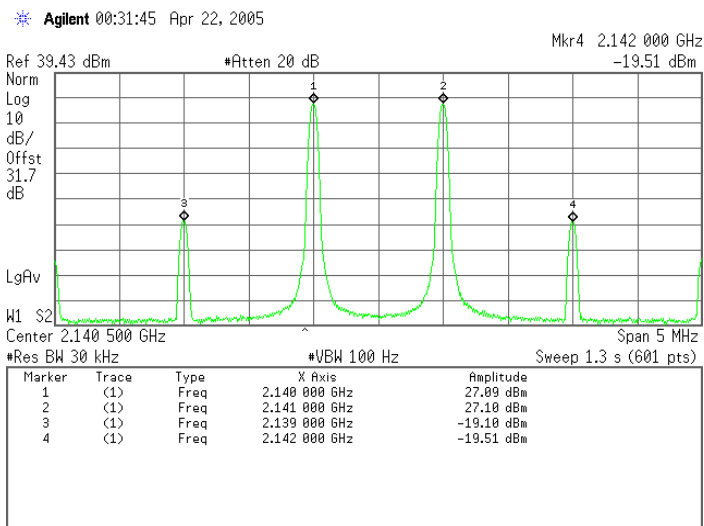


(OIP3)

Agilent 23:42:33 Apr 21, 2005

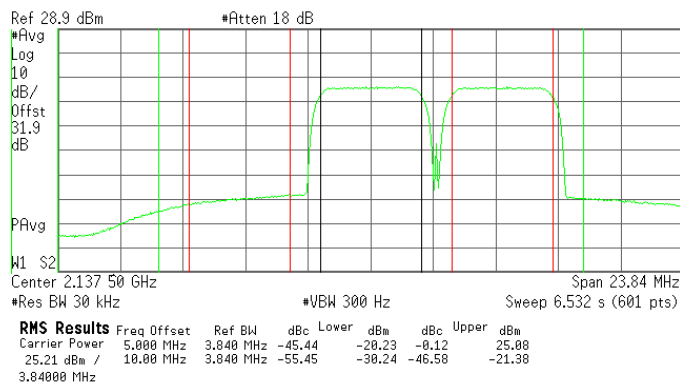

(WCDMA 2FA 28dBm @ -5MHz, -10MHz offset)


Agilent 23:43:18 Apr 21, 2005

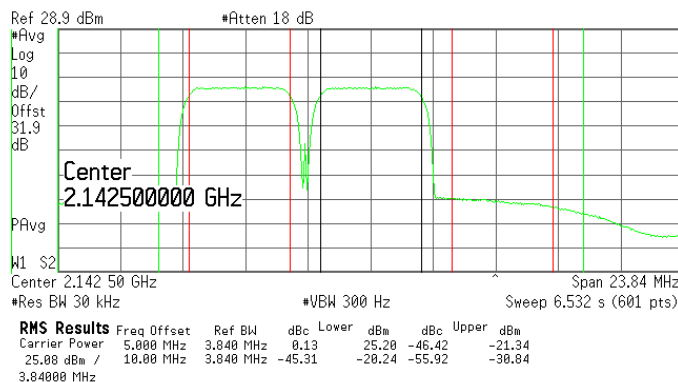


(WCDMA 2FA 28dBm @ +5MHz, +10MHz offset)

- All specifications may change without notice.
- www.rfhic.com

✱ Agilent 23:47:16 Apr 21, 2005

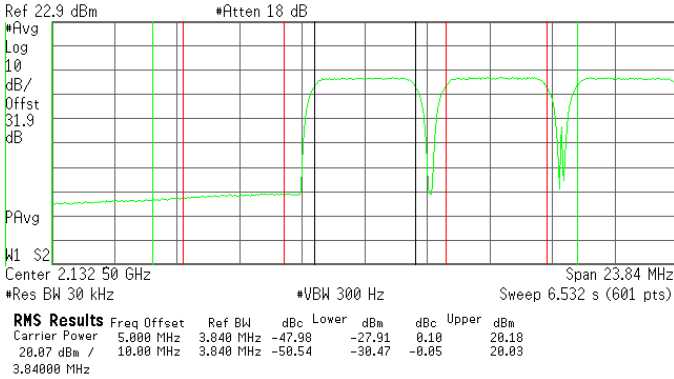

✱ Agilent 23:49:11 Apr 21, 2005

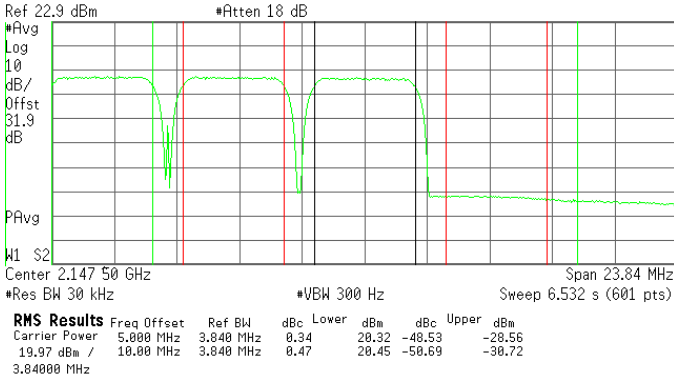


(WCDMA 4FA 26dBm @ -5MHz, -10MHz offset) (WCDMA 4FA 26dBm @ +5MHz, +10MHz offset)

Preliminary 10W
Power Transistor

RT240PD

RFHIC

● Dimension in mm

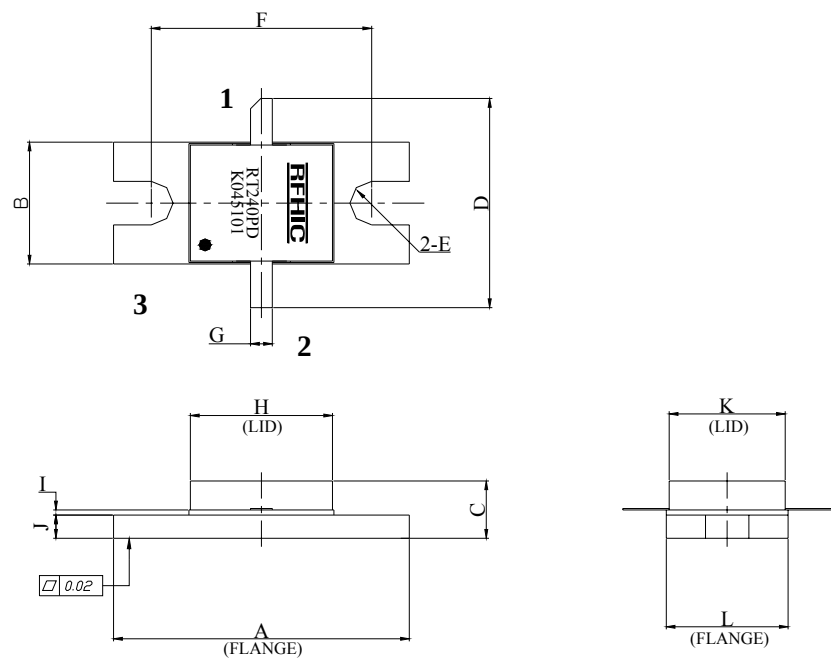

Dimension	Size(mm)			Dimension	Size(mm)		
	Min.	Typ.	Max.		Min.	Typ.	Max.
A	20.3	20.4	20.5	G	1.45	1.5	1.55
B	8.3	8.4	8.5	H	9.7	9.8	9.9
C	3.8	3.9	4.0	I	0.3	0.35	0.4
D	14.3	14.4	14.5	J	1.55	1.6	1.65
E	Ø1.48	Ø 1.5	Ø1.52	K	7.9	8.0	8.1
F	15.1	15.2	15.3	L	8.3	8.4	8.5

● Pin Map

Pin 1	Pin2	Pin3
Gate	Drain	Source

● All specifications may change without notice.
● www.rfhic.com