


RT4002A-1

www.DataSheet4U.com

SHENZHEN RUIITE ELECTRONIC CO.,LTD
Address: 深圳市宝安区79区西乡流塘107国道1-3栋8楼
Tel:86-755-27931867, 27931884, 27931806, 27931875
FAX:86-755-27931864 Postcode:518102
E-Mail:ruite168@21cn.com Http://www.ruitelcd.com

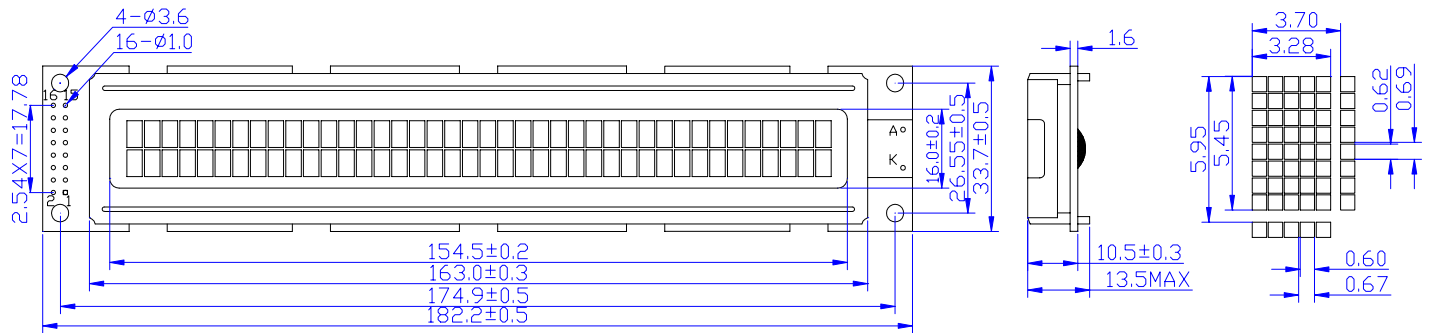

MECHANICAL DATA

Item	Nominal Dimensions	Unit
Module Size(W×H×T)	182.2×33.7×13.5	mm
Viewing Area(W×H)	154.5×16.0	mm
Character Size(W×H)	3.28×5.45	mm
Dot Size(W×H)	0.60×0.62	mm


ABSOLUTE MAXIMUM RATINGS

Item	Symbol	Min	Type	Max	Unit
Operating Voltage	VDD	4.5	5.0	5.5	V
Operating Current	IDD	1.0	1.5	2.0	mA
LED Voltage	V _{LED}	4.5	5.0	5.5	V
LED Current	I _{LED}	150	230	380	mA
Operating Temp.	Topr	0	—	+50	°C
Storage Temp.	Tsto	-10	—	+60	°C

ELECTRICAL CHARACTERISTICS

Item	Symbol	Min	Type	Max	Unit
Input Hight Voltage	V _{IH}	2.2	—	VDD	V
Input Low Voltage	V _{IL}	0	—	0.6	V
Output Hight Voltage	V _{OH}	2.4	—	VDD	V
Output Low Voltage	V _{OL}	0	—	0.4	V


BLOCK DIAGRAM

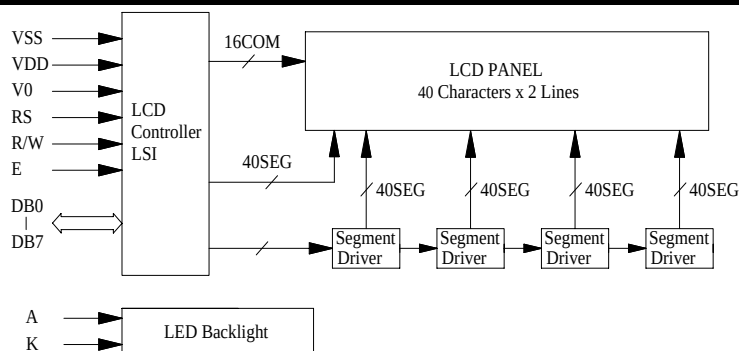

PIN CONNECTIONS

PIN	Symbol	Level	Function
1	VSS	—	GND(0V)
2	VDD	—	Supply Voltage for Logic(+5V)
3	V0	—	Power supply for LCD
4	RS	H/L	H: Data ; L: Instruction Code
5	R/W	H/L	H: Read ; L: Write
6	E	H/L	Enable Signal
7	DB0	H/L	Data Bus Line
8	DB1	H/L	
9	DB2	H/L	
10	DB3	H/L	
11	DB4	H/L	
12	DB5	H/L	
13	DB6	H/L	
14	DB7	H/L	
15	A	—	Backlight Power(+5V)
16	K	—	Backlight Power(0V)

POWER SUPPLY



www.DataSheet4U.com