

High Voltage 4-CH LED Driver Controller

General Description

The RT8492 is a 4-CH LED driver controller that delivers well matched LED current to each channel of LED string. With external current sources, the number of LEDs per string is only limited by the current source and the V_{IN}/V_{OUT} conditions. The current mode PWM boost type controller operates at a programmable switching frequency of up to 1MHz, with a wide V_{IN} range covering from 9V to 32V. The switch driver is designed to drive industrial grade high power MOSFETs.

The PWM loop selects and regulates the LED string with the highest voltage string to 0.9V, thus allowing voltage mismatches between the LED strings. The RT8492 automatically detects and excludes any open and/short strings during operation from the PWM loop to prevent V_{OUT} from over voltage.

The RT8492 also provides LED short protection. If LED short occurs and causes any LEDx but not all LEDx pin voltage greater than 8V, the CAP pin is charged up by internal 10 μ A. If the LED short condition lasts longer than the CAP pin voltage reaches 3.5V, the FLAG pin will go high and the GATE pin will be kept low immediately until the CAP pin voltage drops below 3.5V. The delay time is programmable by the capacitor at the CAP pin.


Features

- Wide Operation Voltage Range : 9V to 32V
- Programmable Channel Current
- 3% Current Matching Accuracy between Channels
- Programmable Switching Frequency
- Easy Analog and Digital Dimming Control
- Programmable Soft-Start
- LED Open Channel Detection and Protection
- LED Short-Fault Detect Latch Off Multiple LED Strings
- Programmable Output Over Voltage Protection
- Under Voltage Lockout and Thermal Shutdown
- 28-Lead TSSOP Package

Applications

- Building and Street Lighting
- LED TV Backlight
- LED Monitor Backlight
- Industrial Display Backlight

Simplified Application Circuit

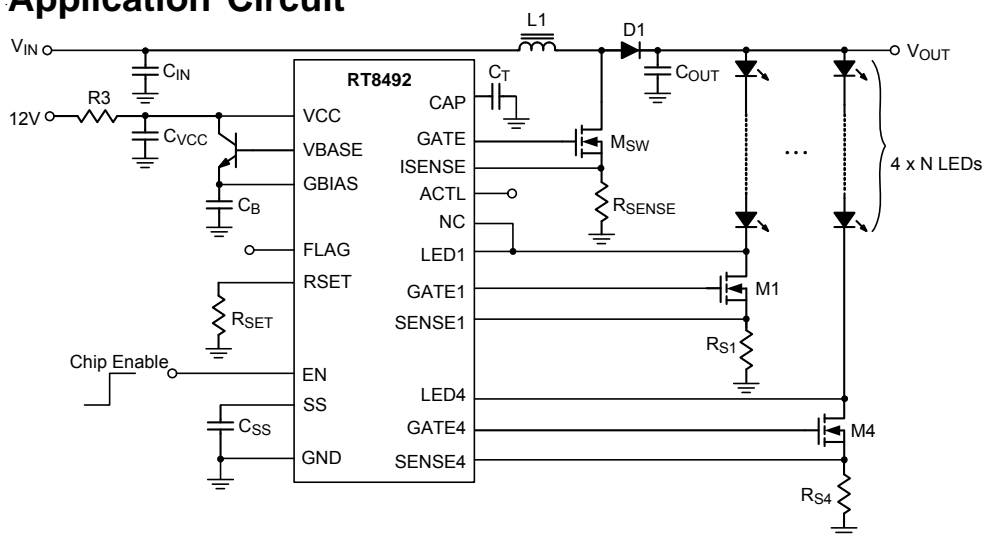

Ordering Information

RT8492 □ □

- Package Type
C : TSSOP-28
- Lead Plating System
G : Green (Halogen Free and Pb Free)

Note :

Richtek products are :

- ▶ RoHS compliant and compatible with the current requirements of IPC/JEDEC J-STD-020.
- ▶ Suitable for use in SnPb or Pb-free soldering processes.


Marking Information

RT8492
GCYMDNN

RT8492GC : Product Number
YMDNN : Date Code

Pin Configurations

(TOP VIEW)

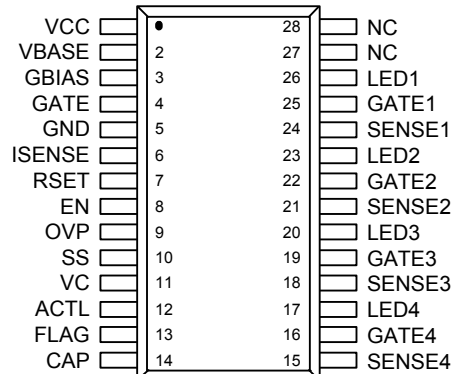


TSSOP-28

Functional Pin Description

Pin No.	Pin Name	Pin Function
1	VCC	Power Supply. For good bypass, a low ESR capacitor is needed between this pin and GND.
2	VBASE	The External Gate Bias Supply is Driven by an External NPN Transistor. The base of this NPN is tied to VBASE pin. The emitter of this NPN is tied to GBIAS pin. The collector of this NPN is tied to VCC.
3	GBIAS	Internal Gate Driver Bias Voltage (around 9.5V). Need a good bypass capacitor between this pin and GND.
4	GATE	Gate Pin of External MOSFET. For the Boost PWM control loop.
5	GND	Ground.
6	ISENSE	Switch Current Sense. Connect a sense resistor from this pin to GND. The switch current sense signal is used for boost current mode PWM loop control and power switch over current protection.
7	RSET	Switching Frequency Set. Put a resistor from RSET to GND to program the switching frequency. $f_{SW} = 280\text{kHz}$ when $R_{SET} = 40\text{k}\Omega$.
8	EN	Chip Enable (Active High).
9	OVP	Over Voltage Protection. OVP pin threshold is around 1.25V. Use a resistor divider from output to GND to program the OVP level.
10	SS	Soft-Start Pin. Use a soft-start cap from SS pin to GND to program the soft-start time period. Around $10\mu\text{A}$ is sourcing out of SS pin.
11	VC	Loop Compensation.
12	ACTL	Analog/PWM Dimming Control. When used in analog dimming, ACTL control range is from 0.4V to 1.4V.
13	FLAG	Fault Indicator Output. Flag pin goes high in two conditions. As the OVP pin goes high, the FLAG pin goes high without time delay. If the LED short condition occurs and the CAP pin voltage is higher than 3.5V, the FLAG pin will go high and the GATE pin will be pulled low and latched off. The latch-off condition can be reset by EN pin or VCC pin.
14	CAP	The LED Short Detection Time Delay Programming. If LED short occurs and causes any LEDx but not all LEDx pin voltage greater than 8V, the CAP pin is charged up by internal $10\mu\text{A}$. If the LED short condition occurs and lasts longer than the CAP pin voltage reaches 3.5V, the FLAG pin will go high. The delay time is programmable by the capacitor at the CAP pin. The typical delay time is 80ms when the capacitor at CAP pin is 47nF.
24, 21, 18, 15	SENSE _x	Source Pin of External MOSFET _x ($x = 1$ to 4). The SENSE _x pins are regulated around 440mV. Connect a sense resistor from this pin to GND. The LED current is programmed by $I_{LED} = 440\text{mV} / (\text{sense resistance})$ when V_{ACTL} is greater than 1.4V.
25, 22, 19, 16	GATE _x	Gate Pin of External MOSFET _x ($x = 1$ to 4). For LED drivers.
26, 23, 20, 17	LED _x	LED _x Pin ($x = 1$ to 4) is Normally Regulated Around 0.9V. If LED short occurs and causes any LEDx but not all LEDx pin voltage greater than 8V, the LED short protection is triggered.
27, 28	NC	Connect to LED1.

Function Block Diagram

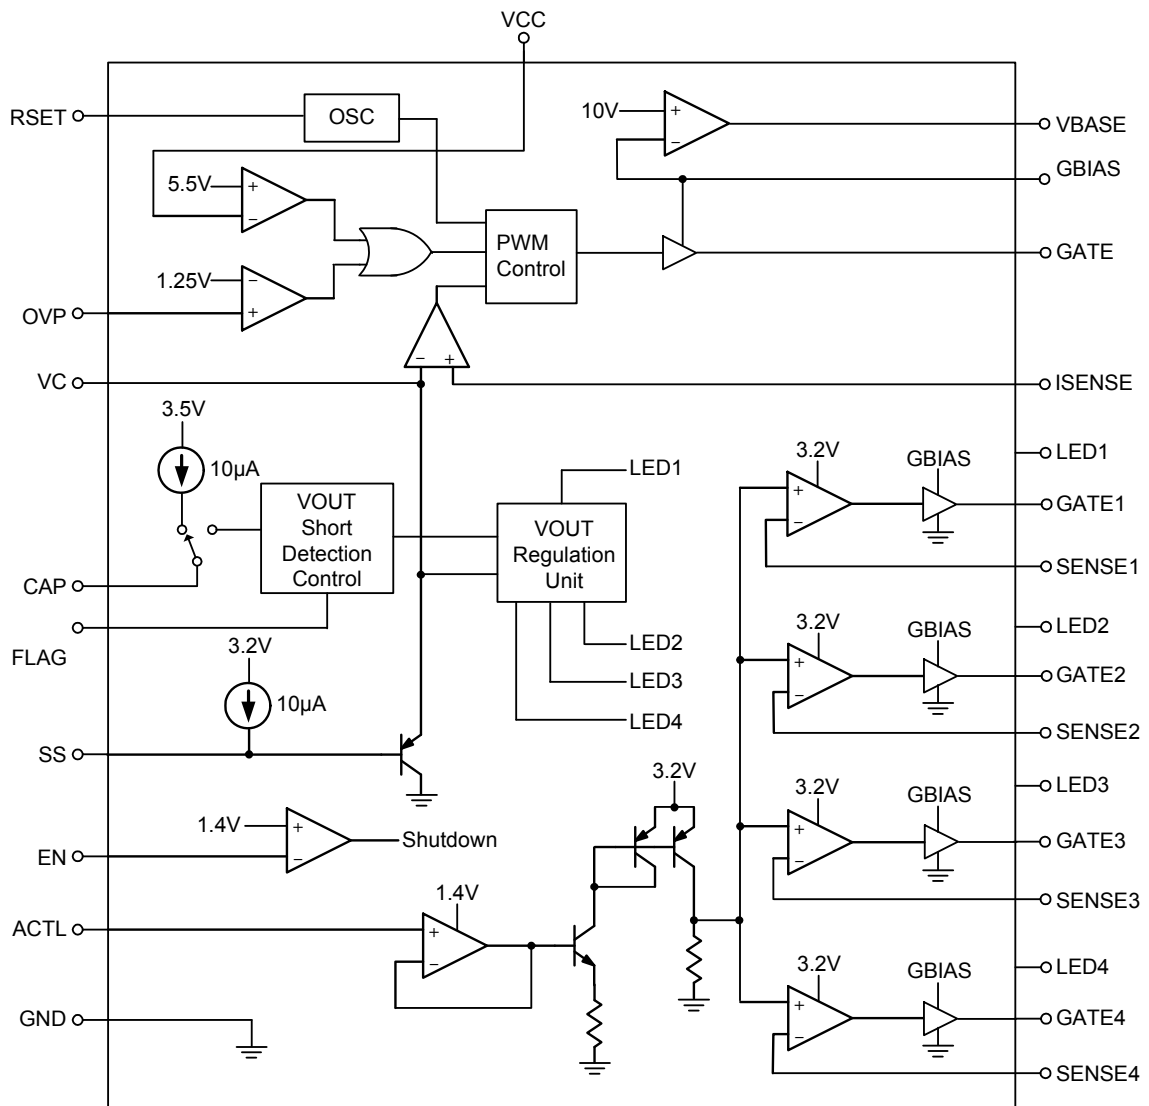

Operation

The internal gate driver circuit is powered from GBIAS pin around 10V ($10.7V - V_{BE}$). The GBIAS voltage is generated by an internal base driver to drive an external NPN emitter follower. The OSC block generates a programmable frequency which is set by an external resistor at RSET pin for RT8492 operation. At the beginning of the oscillator cycle, the GATE turns high. The VOUT regulation unit automatically detects the lowest sensed LEDx pin feedback voltage among the 4 LED strings and compares to 0.9V. If the lowest LEDx pin voltage is lower than 0.9V, the VC pin (the output of the OP AMP in VOUT regulation unit) is charged high. The ISENSE pin voltage is the triangular feedback signal of the sensed switch current (which equals inductor current ramp). The PWM comparator compares ISENSE pin voltage to VC pin voltage. When ISENSE pin voltage exceeds VC pin voltage, the PWM comparator resets the latch and turns off GATE. If ISENSE pin voltage does exceed VC pin voltage by the end of the switching cycle, the GATE will be turned off for minimum off time. The cycle repeats when

the GATE is turned on at the beginning of the next switching cycle. By this PWM closed loop control, the lowest sensed LEDx pin voltage among the 4 LED strings is regulated to 0.9V.

As the system starts, the cap at the soft start pin is slowly charged up by an internal current source around $10\mu A$. During soft start period, the VC pin voltage follows soft start pin voltage up by one V_{BE} and gradually ramps up. The slowly rising VC pin voltage allows the PWM duty to increase gradually to achieve soft start function.

The dimming can be done by varying ACTL pin analog or PWM voltage signal. The internal sense threshold for the 4 current sources follows ACTL signal to achieve dimming control.

The fault protection features of RT8492 include (1) Input Under Voltage Lockout (UVLO), (2) Output Over Voltage Protection (OVP), (3) LED string short, (4) LED string open, and (5) over temperature protection (OTP).

Absolute Maximum Ratings (Note 1)

• VCC	-----	-0.3 to 36V
• ISENSE		
DC	-----	-0.3 to 2V
< 200ns	-----	-0.3 to 6V
• GBIAS	-----	-0.3 to 14V
• SENSE1 to SENSE4		
DC	-----	-0.3 to 1V
< 200ns	-----	-0.3 to 6V
• LED1 to LED4 (Note 2)	-----	-0.3 to 20V
• ACTL, EN, OVP	-----	-0.3 to 10V
• Power Dissipation, $P_D@T_A = 25^\circ\text{C}$		
TSSOP-28	-----	0.67W
• Package Thermal Resistance (Note 3)		
TSSOP-28, θ_{JA}	-----	147.8°C/W
• Junction Temperature	-----	150°C
• Storage Temperature Range	-----	-65°C to 150°C
• Lead Temperature (Soldering, 10 sec.)	-----	260°C
• ESD Susceptibility (Note 4)		
HBM (Human Body Model)	-----	2kV
MM (Machine Model)	-----	200V

Recommended Operating Conditions (Note 5)

• Supply Voltage, VCC	-----	9V to 32V
• Junction Temperature Range	-----	-40°C to 125°C
• Ambient Temperature Range	-----	-40°C to 85°C

Electrical Characteristics(V_{CC} = 12V, No Load, T_A = 25°C, unless otherwise specified)

Parameter		Symbol	Test Conditions	Min	Typ	Max	Unit
Overall							
Supply Current		I _{VCC}	V _{VC} ≤ 0.4V (Switching off)	--	5	10	mA
Shutdown Current		I _{SHDN}	V _{EN} ≤ 1.2V	--	5	20	μA
EN Threshold Voltage	Logic-High	V _{IH}		2	--	--	V
	Logic-Low	V _{IL}		--	--	0.5	
EN Input Current		I _{EN}	V _{EN} ≤ 3.3V	--	2	10	μA
LED Current Programming							
SENSE1 to SENSE4 Threshold			6V > V _{GATEX} > 2V	418	440	462	mV
SENSE Voltage CH to CH Matching			$\frac{V_{(MAX)} - V_{(MIN)}}{2 \times V_{(avg)}}$	--	1	2	%
Analog Dimming ACTL Input Current		I _{ACTL}	V _{ACTL} ≤ 6V	--	10	30	μA

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
LED Current Off Threshold at ACTL	V _{ACTL_OFF}		--	0.4	--	V
LED Current On Threshold at ACTL	V _{ACTL_ON}		--	1.4	--	V
PWM Boost Converter						
Switching Frequency	f _{SW}	R _{SET} = 40kΩ	230	280	320	kHz
Minimum Off-Time		R _{SET} = 40kΩ	--	300	--	ns
VLED Threshold for No Connection	V _{LED}		--	--	0.1	V
Regulated V _{LED}	V _{LED}	Highest Voltage LED String	--	0.9	1.25	V
Amplifier Output Current	I _{VC}	2.4V > V _{VC} > 0.2V	--	±30	--	μA
VC Threshold for PWM Switch Off			--	0.7	--	V
ISENSE Threshold for Current Limit	V _{ISENSE_LIM}		80	125	145	mV
Switch Gate Driver						
GBIAS Voltage	V _{GBIAS}	I _{GBIAS} = −20mA	--	9.5	11	V
GATE High Voltage	V _{GATE_H}	I _{GATE} = −10mA	--	8.2	--	V
		I _{GATE} = −0.1mA	--	8.5	--	
GATE Low Voltage	V _{GATE_L}	I _{GATE} = 10mA	--	0.7	--	V
		I _{GATE} = 0.1mA	--	0.4	--	
GATE Drive Rise and Fall Time		1nF load at Gate	--	20	50	ns
LED Current Sources Gate Driver						
GATE1 to 4 High Voltage	V _{GATEx_H}	I _{GATEx} = −2mA	--	8	--	V
		I _{GATEx} = −0.1mA	--	8.2	--	
GATE1 to 4 Low Voltage	V _{GATEx_L}	I _{GATEx} = 2mA	--	0.7	--	V
		I _{GATEx} = 0.1mA	--	0.5	--	
OVP and Soft-Start						
OVP Threshold	V _{OVP}		1.15	1.25	1.35	V
OVP Input Current	I _{OVP}	V _{OVP} ≤ 1.23V	--	1	--	μA
Soft-Start Pin Current	I _{SS}	V _{SS} ≤ 3.2V, V _{OVP} < 1.2V	--	10	--	μA
SS Soft-Start Pin LED Open Protection Disable and FLAG Disable Threshold	V _{SS_TH}		--	2.5	--	V
CAP and FLAG						
CAP pin Sourcing Current	I _{CAP}	One of LEDx pin > 10V	--	10	--	μA
CAP pin Threshold for FLAG Internal Pull High	V _{FG_TH}		--	3.5	--	V
LEDx Pin Threshold Voltage to Cause FLAG High	V _{LED_TH}		7.1	8	9	V

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Thermal Protection						
Thermal Shutdown temperature	T_{SD}		--	150	--	°C
Thermal Shutdown Hysteresis	ΔT_{SD}		--	20	--	°C

Note 1. Stresses beyond those listed “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions may affect device reliability.


Note 2. Adding a series resistor of at least 20k Ω for higher pin voltage.

Note 3. θ_{JA} is measured at $T_A = 25^\circ\text{C}$ on a high effective thermal conductivity four-layer test board per JEDEC 51-7. θ_{JC} is measured at the exposed pad of the package.

Note 4. Devices are ESD sensitive. Handling precaution is recommended.


Note 5. The device is not guaranteed to function outside its operating conditions.

Typical Application Circuit

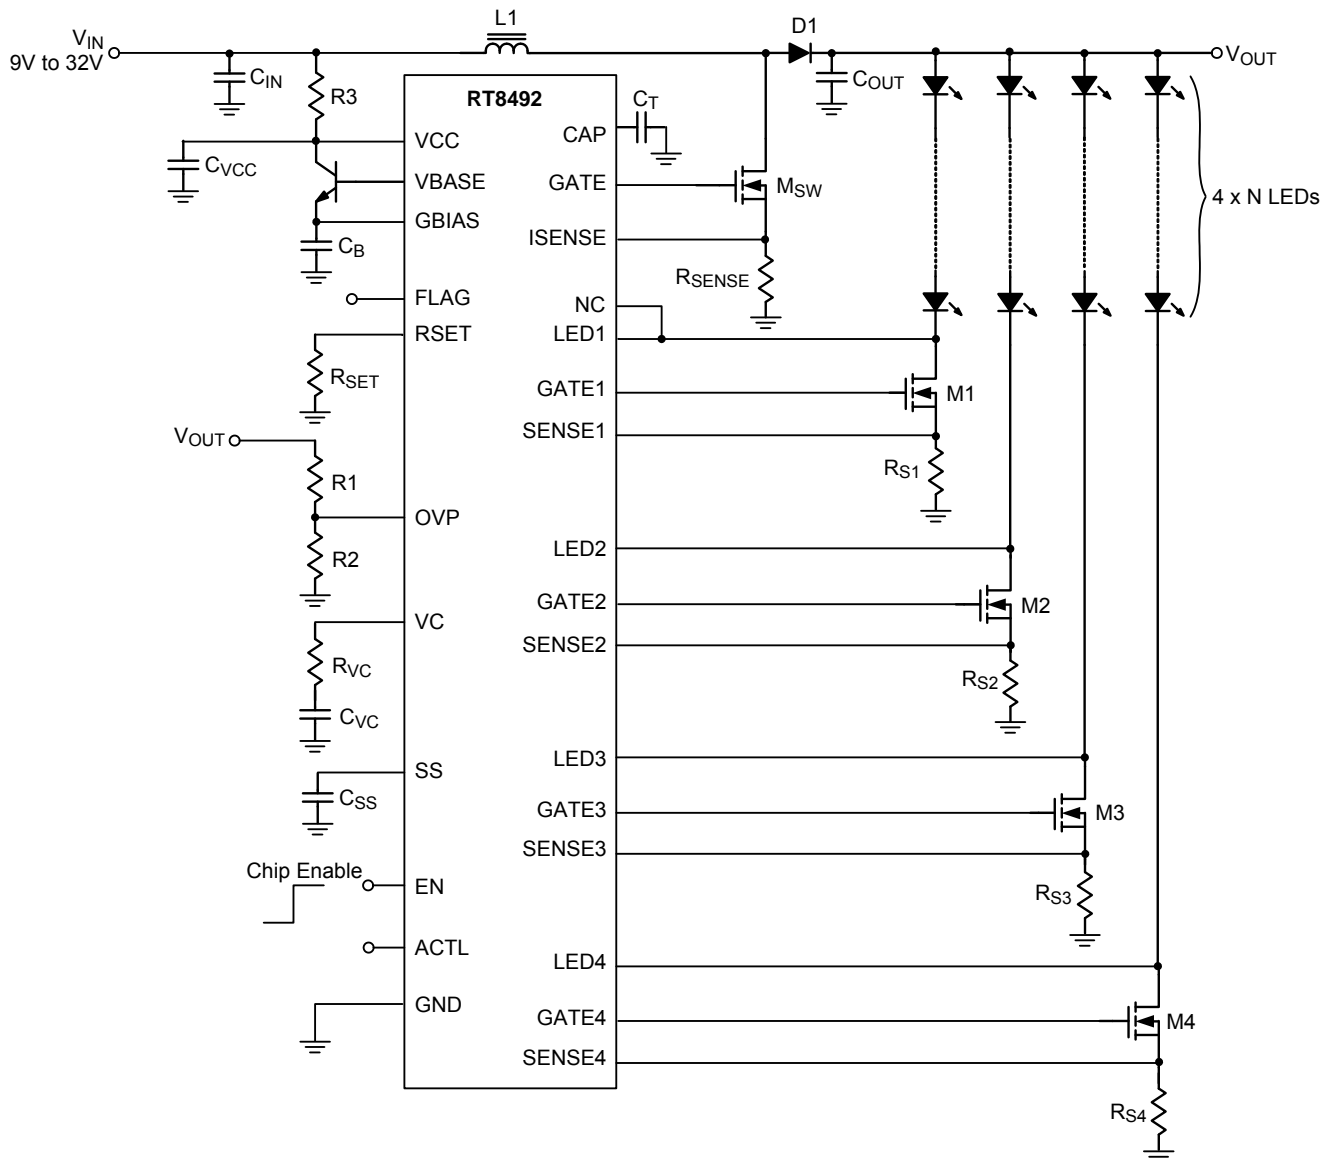


Typical Operating Characteristics


Efficiency vs. Input Voltage

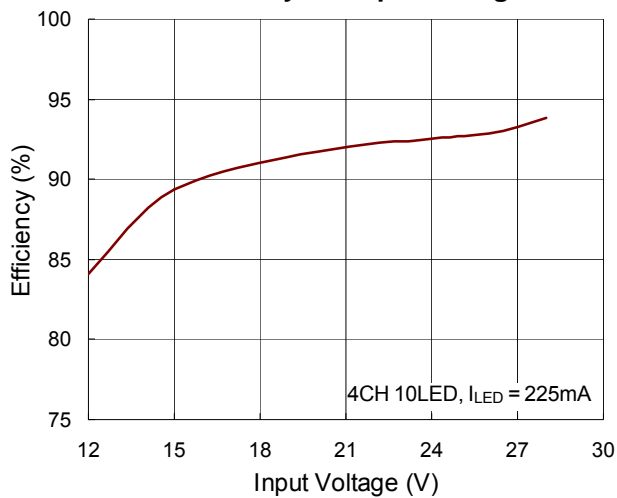


LED Current vs. Input Voltage

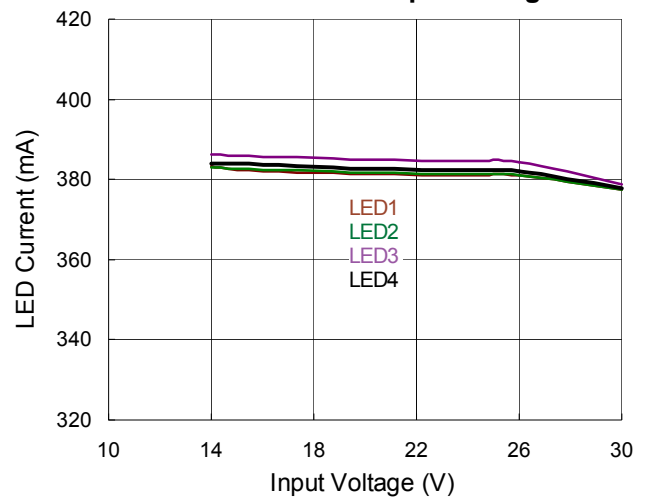


LED Current vs. ACTL PWM Duty

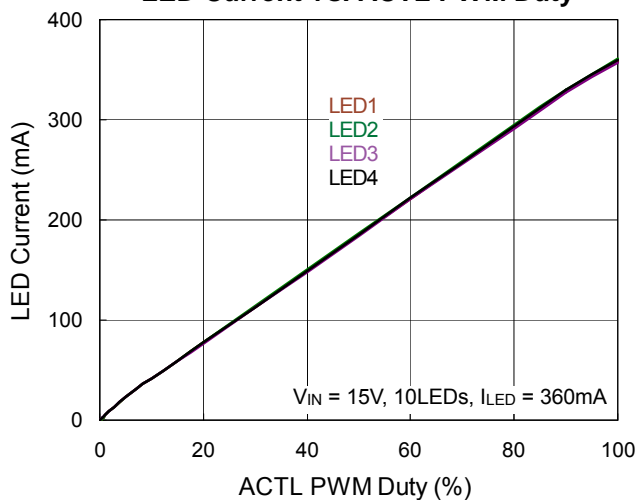


LED Current vs. ACTL Voltage






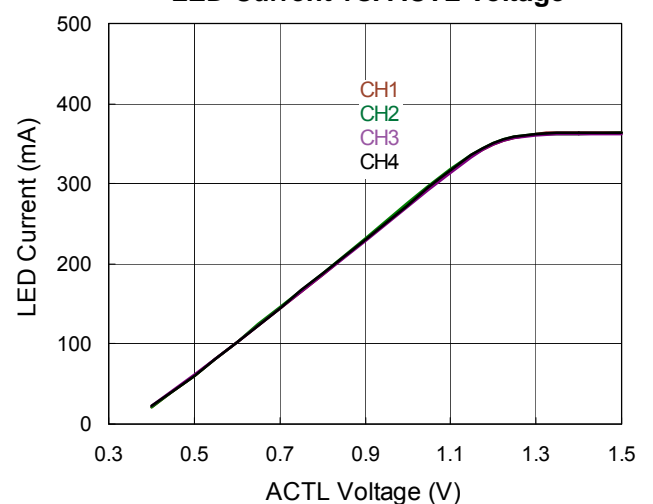


Supply Current vs. Input Voltage

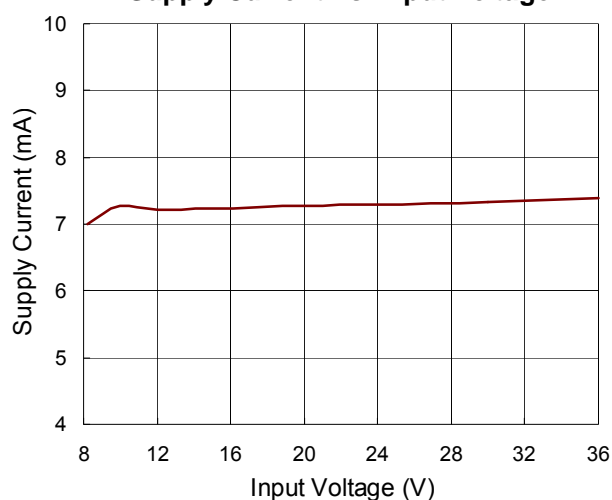


Supply Current vs. Temperature

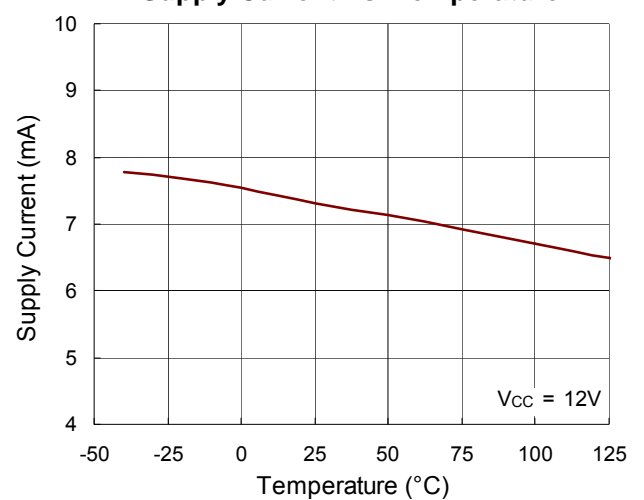


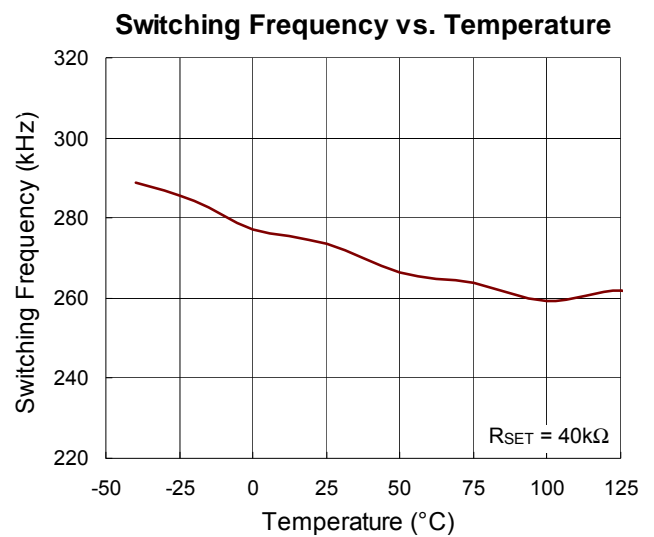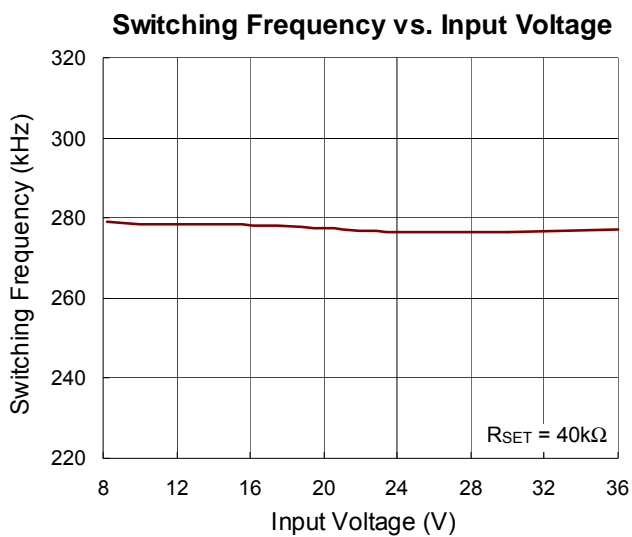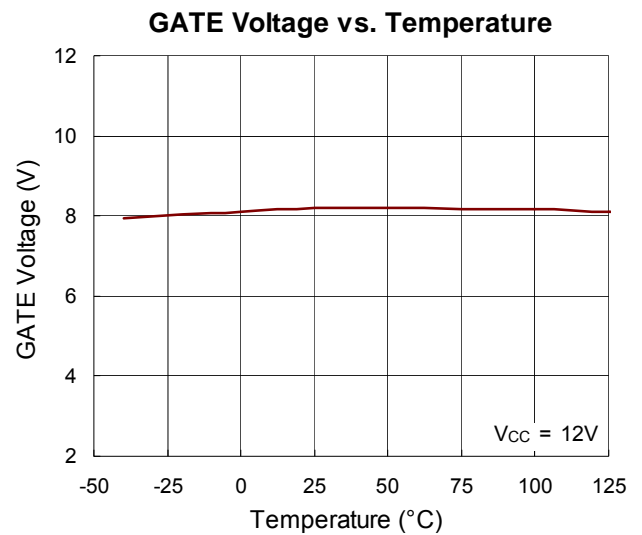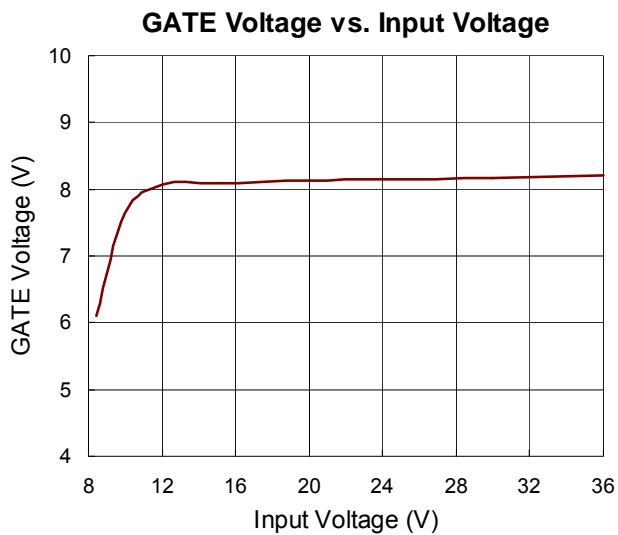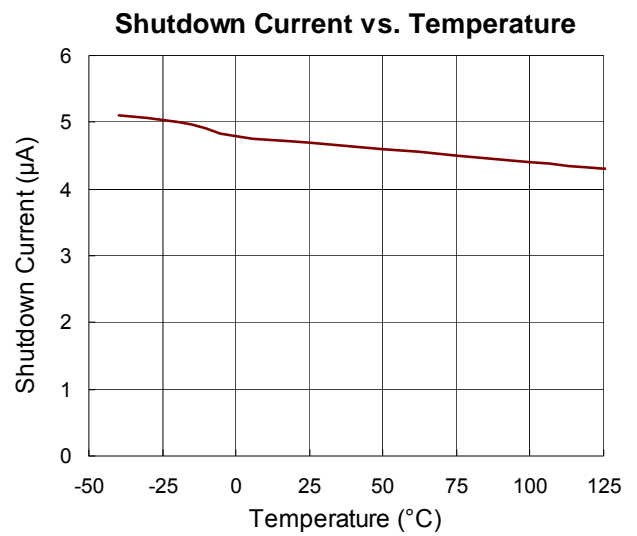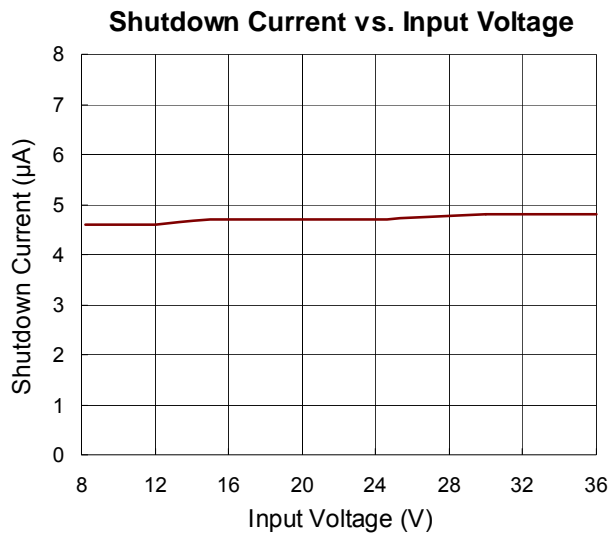


Regulated VLED Voltage vs. Temperature

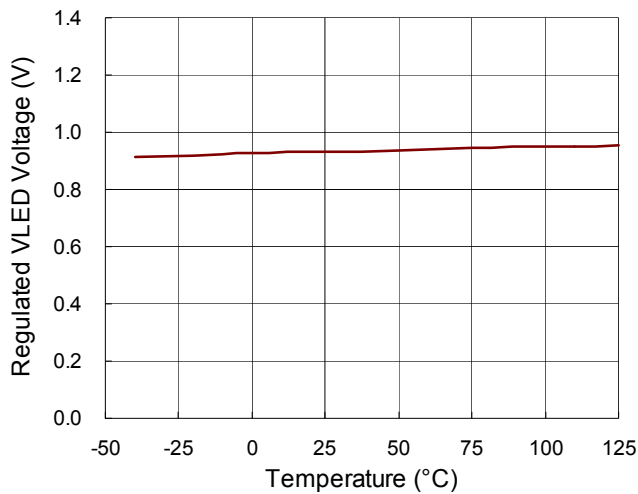


LEDx Short Threshold Voltage vs. Input Voltage

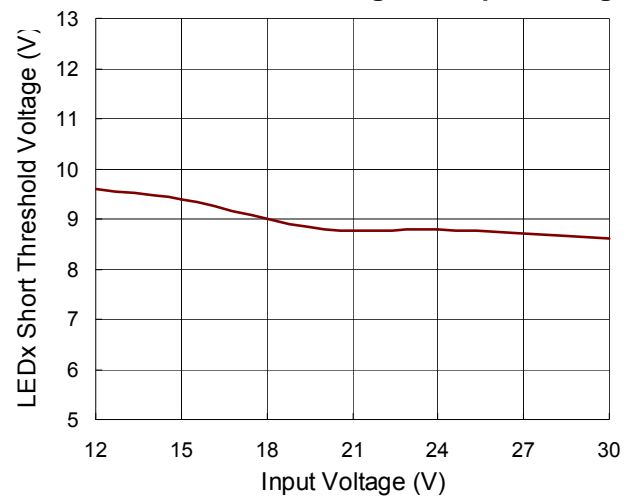


Fault Detection Response

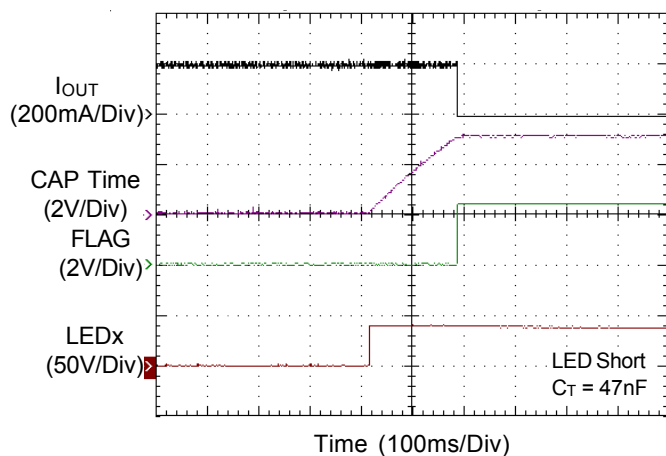


Fault Detection Delay

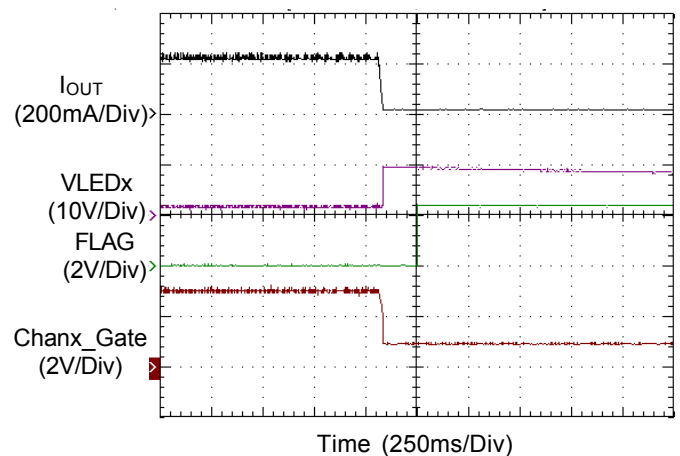

Power Off from ACTL

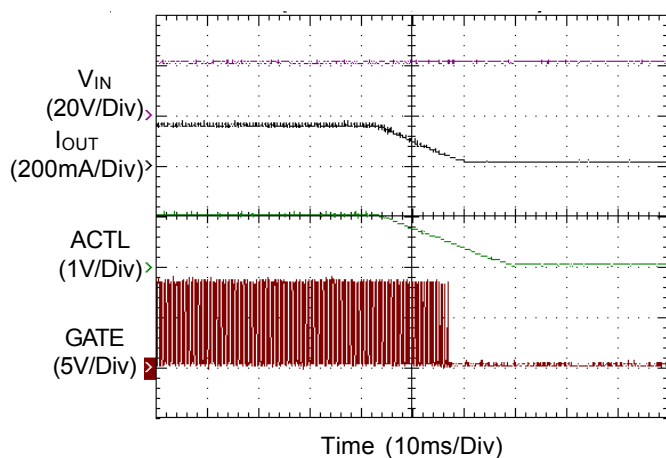

Power On from ACTL

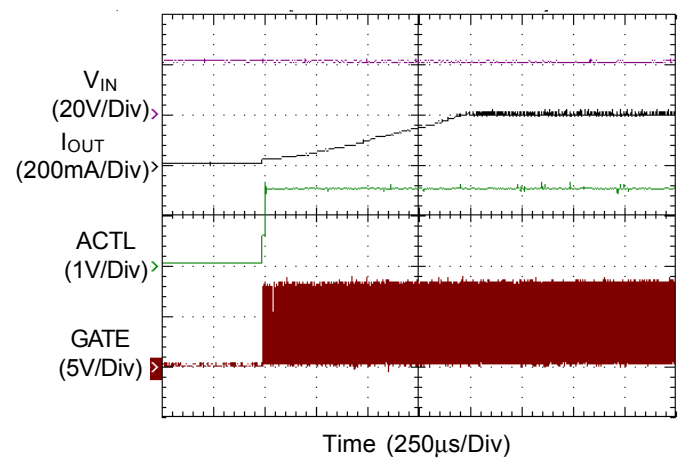

Application Information

The RT8492 is a 4-CH programmable current source controller for LED backlight or lighting application.

By detecting the minimum voltage required to drive each LED string and hence to set the boost output accordingly, this topology reduces power dissipation and increases overall efficiency of the LED lighting system.

The individual current source channel regulates the current flow to give accurate current sinking for each LED string.

The external N-MOSFET current source will accommodate the power dissipation difference among channels resulting from the forward voltage difference between the LED strings.

Both digital PWM dimming signal and analog voltage signal can be used to control the LED current of each channel.

With high speed current source N-MOSFET drivers, the RT8492 features highly accurate current matching of ± 3 percent, while also providing very fast turn-on and turn-off times. This allows a very narrow minimum on or off pulse, which increases dimming range and provides higher linearity.

The RT8492 integrates adjustable switching frequency and soft-start, and provides the circuitry for over temperature, over voltage and current limit protection features.

Input UVLO

The input operating voltage range of the RT8492 is 9V to 32V. An input capacitor at the VCC pin can reduce ripple voltage. It is recommended to use a ceramic 10 μ F or larger capacitance as the input capacitor. This IC provides an Under Voltage Lockout (UVLO) function to enhance the stability when start-up. The UVLO rising input voltage threshold is set at typically 5.5V.

Power Sequence

Refer to below Figure 1 and Figure 2. The recommended power on sequence states that the PWM signal should be ready before EN and/or V_{IN} is ready. Otherwise, the soft-start function will be disabled. As for power off sequence, EN/ V_{IN} must be pulled low within 10ms to prevent "hard-start" as shown as Figure 3.

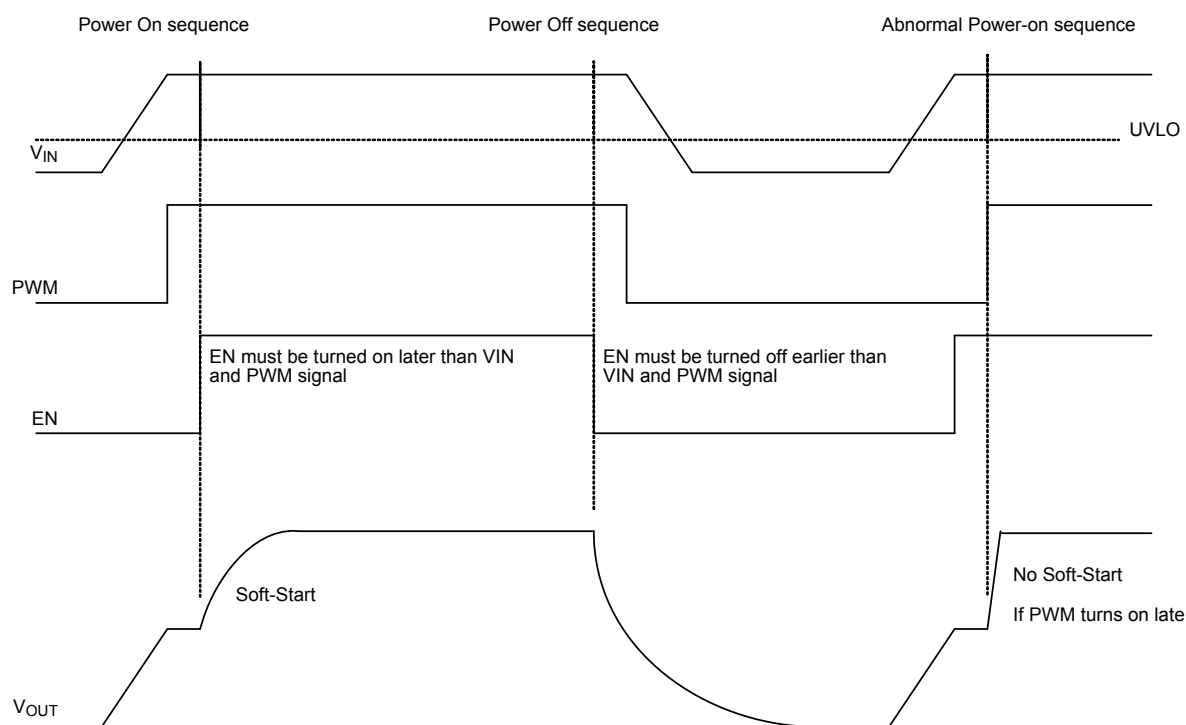


Figure 1. Power On Sequence Control by EN

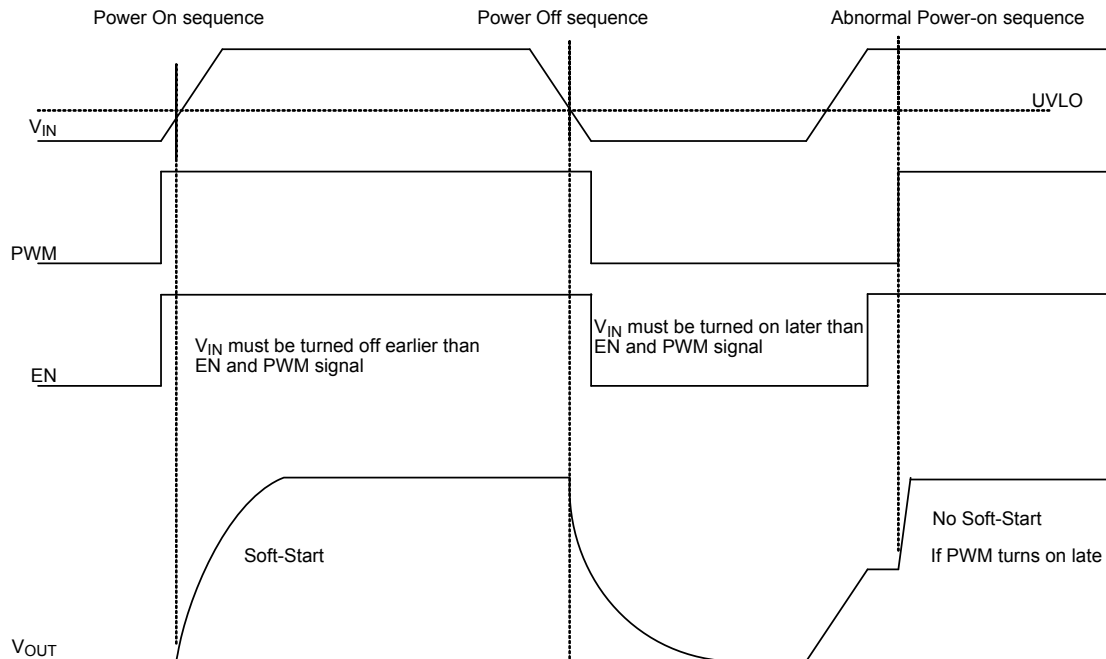
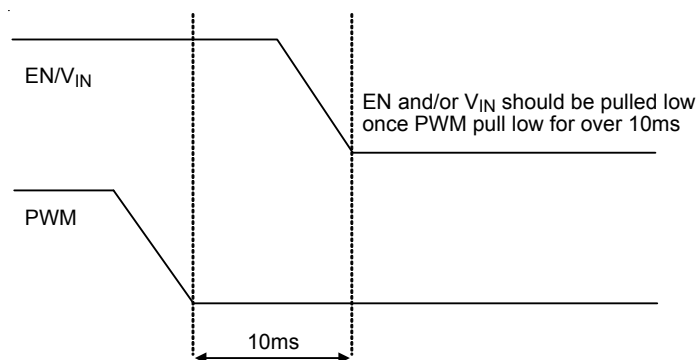
Figure 2. Power On Sequence Control by V_{IN} 

Figure 3. To Prevent "Hard-Start" Sequence

Soft-Start

The soft-start of the RT8492 can be achieved by connecting a capacitor from the SS pin to GND. The built in soft-start circuit reduces the start up current spike and output voltage overshoot. The soft-start time is determined by the external capacitor charged by an internal $10\mu\text{A}$ constant charging current. The SS pin directly limits the rate of voltage rise on the VC pin, which in turn limits the peak switch current.

The soft-start interval is set by the soft-start capacitor selection according to the equation :

$$t_{SS} = C_{SS} \times \frac{3.2V}{10\mu A} \quad (\text{s})$$

A typical value for the soft-start capacitor is $0.1\mu\text{F}$. The soft-start pin reduces the oscillator frequency and the maximum current in the switch. The soft-start capacitor is discharged when EN/UVLO falls below its threshold, during an over temperature event, or during a GBIAS under voltage event.

GBIAS Regulator Operation

The GBIAS pin requires a capacitor for stable operation and also to store the charge for the large GATE switching currents. Choose a low ESR, X7R or X5R ceramic capacitor with enough voltage rating for best performance.

The value of the capacitor is determined primarily by the stability of the regulator rather than the gate charge of the switching N-MOSFET. A 1μF capacitor will be adequate for most applications.

Place the capacitor close to the IC to minimize the trace length to the GBIAS pin and also to the IC ground. An internal current limit on the GBIAS protects the RT8492 from excessive on chip power dissipation.

If the input voltage, V_{IN} , does not exceed 10V, then the GBIAS pin should be connected to the input supply. Be aware that a typical 20mA current will load the GBIAS to shutdown.

Loop Compensation

The RT8492 uses an internal error amplifier, in which through its compensation pin (VC) the loop response is optimized for specific applications. The external inductor, output capacitor, compensation resistor, and compensation capacitor determine the loop stability. The inductor and output capacitor are chosen based on performance, size and cost. The compensation resistor and capacitor at VC are selected to optimize control loop response and stability.

The compensation resistor and capacitor are connected in series from the VC pin to GND to provide a pole and a zero for proper loop compensation. The typical compensation values for RT8492 is 1.8kΩ and 3.3nF.

LED Current Setting

The maximum current of channel 1 to 4 is programmed by placing an appropriate sense resistor at each LED string. When the voltage of ACTL is higher than 1.4V, the LED current can be calculated by the following equation :

$$I_{LED(MAX)} = \frac{440mV}{R_{Sx}} \quad (mA)$$

where, R_{Sx} is the resistor between external regulating N-MOSFET and GND.

The ACTL pin should be tied to a voltage higher than 1.4V to get the full scale 440mV (typical) threshold across the sense resistor. The ACTL pin can also be used to dim the

LED current to zero, although relative accuracy decreases with the decreasing voltage sense threshold. When the ACTL pin voltage is less than 1.4V, the LED current is :

$$I_{LED} = \frac{(V_{ACTL} - 0.4) \times 440mV}{R_{Sx}} \quad (mA)$$

The ACTL pin can also be used in conjunction with a thermistor to provide over temperature protection for the LED load, or with a resistive voltage divider to V_{IN} to reduce output power and switching current when V_{IN} is low.

Brightness Control

For LED applications where a wide dimming range is required, two methods are available: analog dimming and PWM dimming. The easiest method is to simply vary the DC current through the LED by analog dimming at the ACTL pin voltage. The PWM dimming offers wider dimming range over the analog dimming. The PWM dimming at the ACTL pin achieves dimming by turning the current source MOSFETs under the LED string fully on when PWM is high and fully off when PWM is low via different duty cycle to control the average LED current. The ACTL PWM dimming is more preferred by LED manufacturers than the ACTL analog dimming. The advantage is the chromaticity of the LEDs which remains unchanged since the LED current is either zero or at the full programmed current. But, this advantage comes with a price. The dimming non-linearity and dimming flicker at certain duty spot depending on the PWM dimming frequency can happen due to the load transient response variation in each PWM dimming cycle. To avoid this potential dimming non-linearity and the dimming flicker issues, analog dimming signal should be applied at the ACTL pin. To get analog dimming signal at the ACTL pin, the PWM dimming signal at the ACTL pin can be converted into analog signal through an external RC filter.

The RT8492 features both the analog and the digital dimming controls. The analog dimming is linearly controlled by an external voltage (0.4V to 1.4V) at the ACTL pin. A very high contrast ratio can be achieved by driving the ACTL pin with a PWM signal at the recommended PWM frequency of 100Hz to 10kHz with acceptable dimming linearity. The dimming frequency can

be up to 30kHz with observable dimming non-linearity at the low dimming duty range. The LED current cannot be 100% proportional to the duty cycle, especially at high dimming frequency and in low duty ratio condition, because of the physical limitation on the internal regulation control loop transient response time. Referring to Figure 4, the minimum dimming duty with good dimming linearity can be as low as 1% for the PWM dimming frequency range between 100Hz and 300Hz. For the PWM dimming frequency between 300Hz and 1kHz, the minimum dimming duty with good dimming linearity is around 5%. If the PWM dimming frequency is increased between 1kHz and 30kHz, the minimum dimming duty with good dimming linearity will be around 10%.

Table 1.

Dimming Frequency (Hz)	Duty (Min.)	Duty (Max.)
$100 < f_{PWM} \leq 200$	0.15%	100%
$200 < f_{PWM} \leq 500$	0.09%	100%
$500 < f_{PWM} \leq 1k$	0.22%	100%
$1k < f_{PWM} \leq 2k$	0.44%	100%
$2k < f_{PWM} \leq 5k$	0.90%	100%
$5k < f_{PWM} \leq 10k$	2.20%	100%
$10k < f_{PWM} \leq 20k$	4.30%	100%

Note : The minimum duty in Table 1 is based on the application circuit and does not consider the deviation of current linearity.

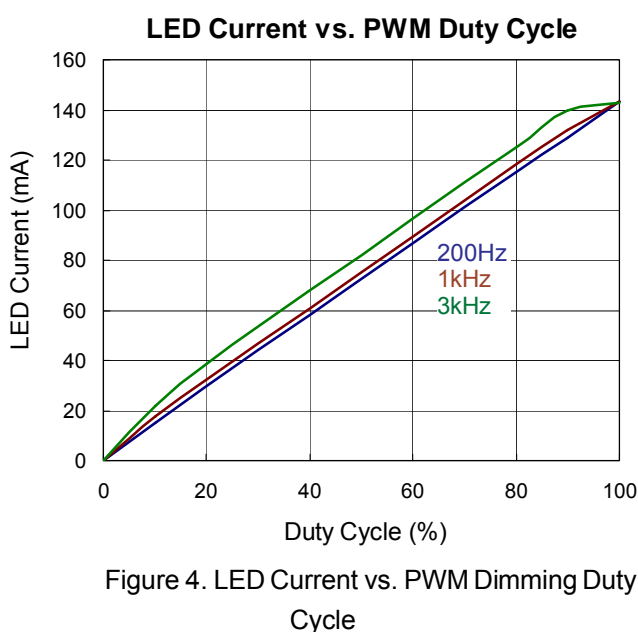


Figure 4. LED Current vs. PWM Dimming Duty Cycle

Programmable Switching Frequency

The RSET frequency adjust pin allows the user to program the switching frequency from 100kHz to 1MHz in order to optimize efficiency and performance or minimize external component size. Higher frequency operation yields smaller component size but increases switching losses and gate driving current, and may not allow sufficiently high or low duty cycle operation. Lower frequency operation gives better performance, but is more costly with larger external component size. An external resistor from the RSET pin to GND is required do not leave this pin open. For an appropriate R_{SET} value, refer to Figure 5.

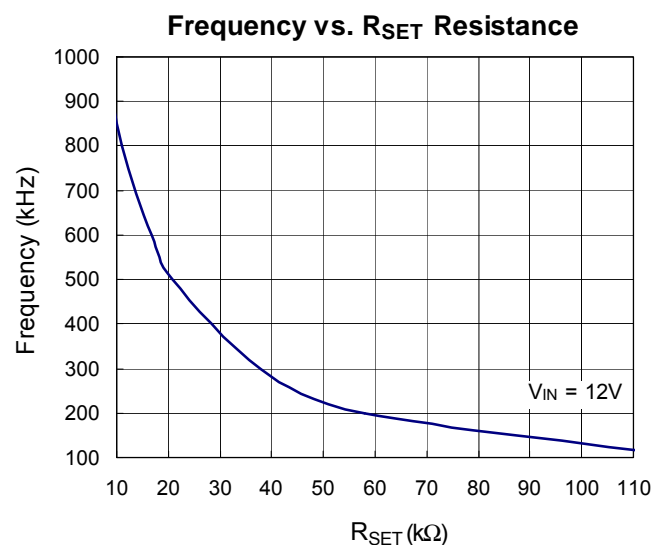


Figure 5. Switching Frequency vs. R_{SET}

LED Pin External Resistor Connection

The RT8492 equips 4-CH LED drivers and each channel supports numerous LEDs. The 4 LED strings are connected from VOUT to pin LEDx (x = 1 to 4) respectively.

If one of the LED channel is not used, the LEDx (x = 1 to 4) pins should be connected to ground directly.

In typical application, the current source MOSFET drain node is tied to LEDx pin. The LEDx pin voltage is fed back and regulated around 0.9V by the PWM control loop. Hence, the LEDx pin voltage will not exceed the absolute maximum rating at 20V.

If the short circuit between the LED string positive node and the negative node could happen during production, to protect the LEDx pins from damage in high Vout applications (with Vout < 50V), a resistor Rx (around

20kΩ) between current source MOSFET drain node and LEDx node as shown in Figure 6 is recommended to limit the breakdown current into the LEDx pins. For applications with Vout greater than 50V, a bigger Rx will be needed to limit the current into the LEDx pins less than 2mA.

Since there is leakage current out of the LEDx pins, note that the adding of the resistor Rx introduces voltage offset to the current source MOSFET drain node regulation voltage by the amount of the leakage current times Rx.

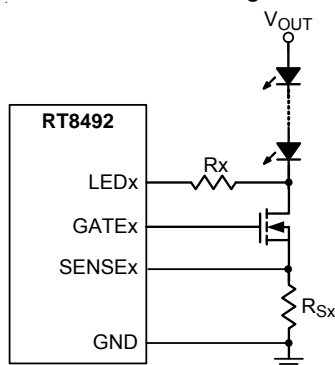


Figure 6. LED Pin External Resistor Connection

LED Error Detect

If one of LED strings is open, this LED channel will be turned off. The output voltage maintain the normal operating level by other LED strings. If LEDs are shorted in one of the LED strings. The LEDx voltage of the shorted LED channel is greater the fault threshold voltage (8V), then the RT8492 will turn off all channels. However if the short time of LED channel is less than the flog time set by cap. The LED short protection circuit will not disable any of the channels. The typical flag delay time is 80ms when cap placed 47nF. All the LED errors can be cleared by recycling the EN pin or applying a complete power on reset.

Output Over Voltage Protection Setting

The RT8492 is equipped with Over Voltage Protection (OVP) function. When the voltage at the OVP pin exceeds a threshold of approximately 1.25V, the power switch is turned off. The power switch can be turned on once again after the voltage at the OVP pin drops below 1.25V. The output voltage can be clamped at a certain voltage level set by the following equation :

$$V_{OUT, OVP} = 1.25 \times \left(1 + \frac{R1}{R2} \right)$$

where R1 and R2 make up the resistive voltage divider from VOUT to GND with the divider center node connected to the OVP pin.

As long as one string is in normal operation, the controller will automatically ignore the open strings and continue to regulate the current for the string(s) in normal operation.

Over Temperature Protection

The RT8492 has an Over Temperature Protection (OTP) function to prevent overheating caused by excessive power dissipation. The OTP function will shut down switching operation when the die junction temperature exceeds 150°C. The chip will automatically start to switch again once the OTP condition disappears.

Inductor Selection

The inductor for the RT8492 should have a saturation current rating appropriate to the maximum switch current. Choose an inductor value based on the operating frequency, input voltage and output voltage to provide a current mode ramp during the MOS switching. Allow the peak to peak inductor ripple to be ±30% of the output current. The following equations are useful to estimate the inductor value :

$$L = \frac{(V_{OUT} - V_{IN}) \times (V_{IN})^2}{2 \times I_{OUT} \times f \times (V_{OUT})^2 \times 0.3}$$

The inductor must be selected with a saturation current rating greater than the peak current provided by the following equation :

$$I_{PEAK} = \frac{V_{OUT} \times I_{OUT}}{\eta \times V_{IN}} + \frac{V_{IN}}{2 \times L \times f} \times \left(\frac{V_{OUT} - V_{IN}}{V_{OUT}} \right)$$

where

VOUT = maximum output voltage.

VIN = minimum input voltage.

f = operating frequency.

IOUT = sum of current from all LED strings.

η is the efficiency of the power converter.

The boost converter operates in discontinuous conduction mode over the entire input voltage range when the L1 inductor value is less than this value L. With an inductance greater than L, the converter operates in continuous conduction mode at the minimum input voltage and may be discontinuous at higher voltages.

Input Over Current Protection

The resistor, R_{SENSE} , between the source of the external switching N-MOSFET and GND should be selected to provide adequate switch current.

The RT8492 senses the inductor current through ISENSE pin in the switch on period. The duty cycle depends on the current sense signal summed with the internal slope compensation and compared to the VC signal. The external N-MOSFET will be turned off when the current signal is larger than the VC signal. In the off period, the inductor current will descend. The external N-MOSFET is turned on by the oscillator in the next beginning cycle. To drive the application without exceeding the current limit threshold on the ISENSE pin of the RT8492, select a resistor that gives a switch current of at least 20% greater than the required LED current according to :

$$R_{SENSE} = \frac{I_{SENSE} \text{ threshold spec minimum value}}{I_{OCP}}$$

$$I_{OCP} = (1.33 \text{ to } 1.5) \times I_{PEAK}$$

Where I_{PEAK} formula can be found in the inductor selection section above.

The ISENSE pin input to RT8492 should be a kelvin connection to the positive terminal of R_{SENSE} .

Power MOSFET Selection

For applications operating at high input or output voltages, the power N-MOSFET switch is typically chosen for drain voltage V_{DS} rating and low gate charge. Consideration of switch on resistance, $R_{DS(ON)}$, is usually secondary because switching losses dominate power loss. The GBIAS regulator on the RT8492 has a fixed current limit to protect the IC from excessive power dissipation at high V_{IN} , so the N-MOSFET should be chosen such that the product of Q_G at 7V and the switching frequency does not exceed the GBIAS current limit.

Schottky Diode Selection

The Schottky diode, with their low forward voltage drop and fast switching speed, is necessary for the RT8492 applications. In addition, power dissipation, reverse voltage rating and pulsating peak current are important parameters of the Schottky diode that must be considered. Choose a suitable Schottky diode whose reverse voltage rating is

greater than the maximum output voltage. The diode's average current rating must exceed the average output current. The diode conducts current only when the power switch is turned off (typically less than 50% duty cycle). If using the PWM feature for dimming, it is important to consider diode leakage, which increases with the temperature, from the output during the PWM low interval. Therefore, choose the Schottky diode with sufficiently low leakage current.

Capacitor Selection

The input capacitor reduces current spikes from the input supply and minimizes noise injection to the converter. For most applications, a 10 μ F ceramic capacitor is sufficient. A value higher or lower may be used depending on the noise level from the input supply and the input current to the converter.

In boost applications, the output capacitor is typically a ceramic capacitor selected based on the output voltage ripple requirements. The minimum value of the output capacitor, C_{OUT} , is approximately given by the following equation :

$$C_{OUT} = \frac{I_{OUT} \times (V_{OUT} - V_{IN})}{\eta \times V_{RIPPLE} \times V_{OUT} \times f}$$

where V_{RIPPLE} is the output voltage ripple, for LED applications, the equivalent resistance of the LED is typically low and the output filter capacitor should be sized to attenuate the current ripple. Use of X7R type ceramic capacitors is recommended. Lower operating frequencies will require proportionately higher capacitor values.

Thermal Considerations

For continuous operation, do not exceed absolute maximum junction temperature. The maximum power dissipation depends on the thermal resistance of the IC package, PCB layout, rate of surrounding airflow, and difference between junction and ambient temperature. The maximum power dissipation can be calculated by the following formula :

$$P_{D(MAX)} = (T_{J(MAX)} - T_A) / \theta_{JA}$$

where $T_{J(MAX)}$ is the maximum junction temperature, T_A is the ambient temperature, and θ_{JA} is the junction to ambient thermal resistance.

For recommended operating condition specifications, the maximum junction temperature is 125°C. The junction to ambient thermal resistance, θ_{JA} , is layout dependent. For TSSOP-28 package, the thermal resistance, θ_{JA} , is 147.8°C/W on a standard JEDEC 51-7 four-layer thermal test board. The maximum power dissipation at $T_A = 25^\circ\text{C}$ can be calculated by the following formula :

$$P_{D(MAX)} = (125^\circ\text{C} - 25^\circ\text{C}) / (147.8^\circ\text{C/W}) = 0.67\text{W}$$

for TSSOP-28 package

The maximum power dissipation depends on the operating ambient temperature for fixed $T_{J(MAX)}$ and thermal resistance, θ_{JA} . The derating curve in Figure 7 allows the designer to see the effect of rising ambient temperature on the maximum power dissipation.

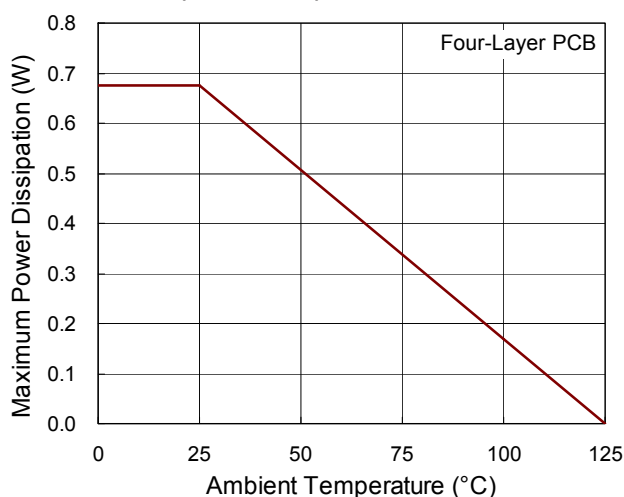


Figure 7. Derating Curve of Maximum Power Dissipation

Layout Consideration

PCB layout is very important when designing power switching converter circuits. Some recommended layout guidelines are suggested as follows :

- ▶ The power components L1, D1, C_{IN}, M_{SW} and C_{OUT} must be placed as close to each other as possible to reduce the ac current loop area.
- ▶ The PCB trace between power components must be as short and wide as possible due to large current flow through these traces during operation.
- ▶ Place L1 and D1 which are connected to N-MOSFET as close as possible.
- ▶ The trace should be as short and wide as possible.
- ▶ The input capacitor, C_{VCC} must be placed as close to the VCC pin as possible.
- ▶ Place the compensation components to the VC.


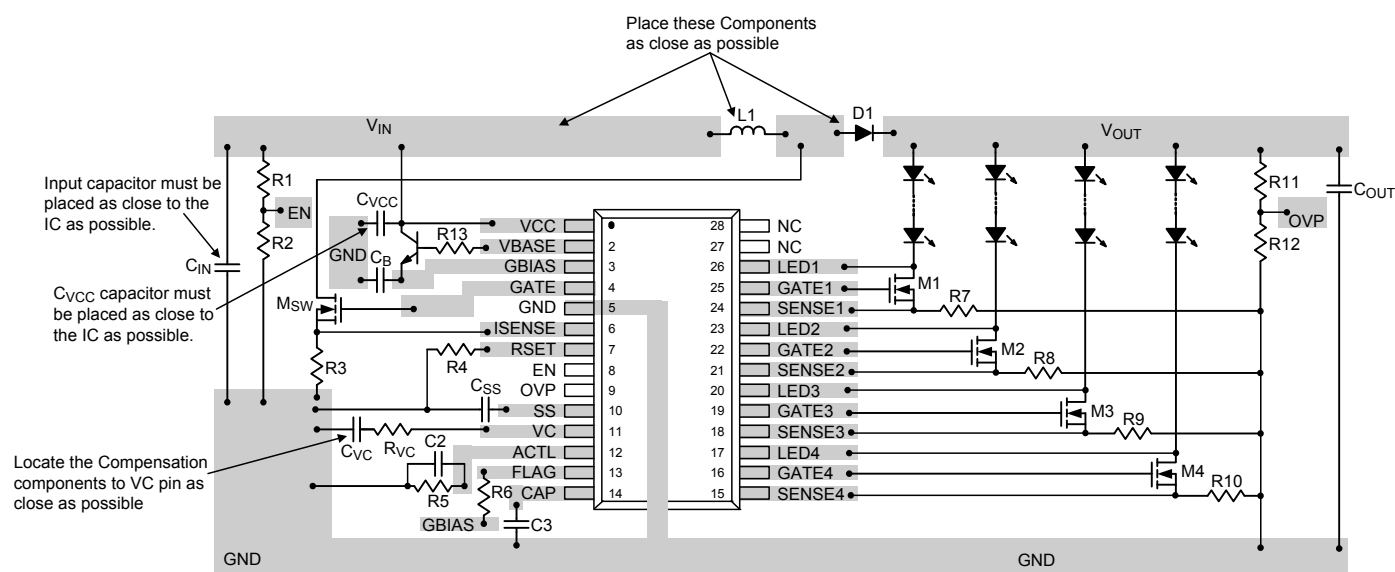


Figure 8. PCB Layout Guide

Outline Dimension

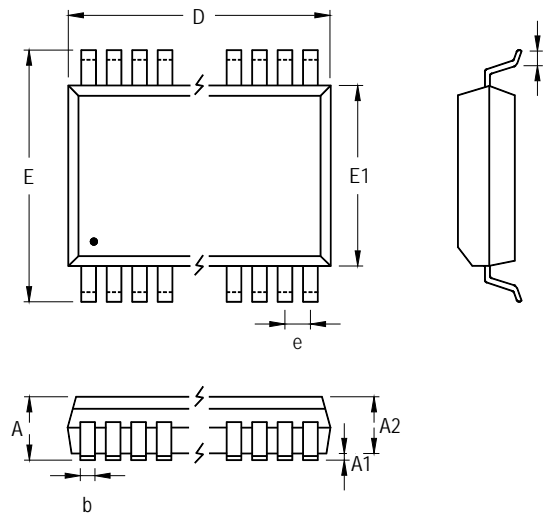

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	Min	Max	Min	Max
A	1.000	1.200	0.039	0.047
A1	0.050	0.150	0.002	0.006
A2	0.800	1.050	0.031	0.041
b	0.190	0.300	0.007	0.012
D	9.600	9.800	0.378	0.386
e	0.650		0.026	
E	6.300	6.500	0.248	0.256
E1	4.300	4.500	0.169	0.177
L	0.450	0.750	0.018	0.030

28-Lead TSSOP Plastic Package

Richtek Technology Corporation

14F, No. 8, Tai Yuen 1st Street, Chupei City

Hsinchu, Taiwan, R.O.C.

Tel: (8863)5526789

Richtek products are sold by description only. Richtek reserves the right to change the circuitry and/or specifications without notice at any time. Customers should obtain the latest relevant information and data sheets before placing orders and should verify that such information is current and complete. Richtek cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Richtek product. Information furnished by Richtek is believed to be accurate and reliable. However, no responsibility is assumed by Richtek or its subsidiaries for its use; nor for any infringements of patents or other rights of third parties which may result from its use. No license is granted by implication or otherwise under any patent or patent rights of Richtek or its subsidiaries.