

System On Module RainboW-G15M-MXM

i.MX6 MXM SOM Module



The i.MX6 MXM SOM is based on Freescale's i.MX6 Series Quad/Dual/Solo core processor running at 1GHz.A single ruggedized MXM connector provides the carrier board interface to carry all the I/O signals to and from the MXM module. With 1080p HD decoding & encoding and 2D/3D graphics an enhanced and optimized user experience is achieved.

The MXM connector pinouts are fully compatible with iWave i.MX53 MXM SOM. The i.MX6 MXM SOM has an additional expansion connector to bring out the special/extra features of i.MX6 Series Quad/Dual/Solo core processor. The i.MX6 MXM SOM is simple and low cost yet rugged.

APPLICATIONS: Automotive Infotainment, Advanced HMI, Telematics, Digital Signage, Healthcare and Medical Equipments

MXM 3.0 RVS





iW-RainboW-G15M-MXM HIGHLIGHTS

ARM Cortex A9@ 1GHz Dual/Quad core

64-bit DDR3-1066 support

OpenGL® ES 2.0 3D, OpenVG[™] 1.1graphics accelerators

Multi format HD1080p HW decode and encode

Four simultaneous display support

Integrated high bandwidth connectivity peripherals

Industry latest HDMI1.4, SDXC, MIPI CSI/DSI interfaces

Technical &quick customization support

5+ years, Long term support

SPECIFICATIONS

CPU i.MX6 1GHz/800MHz Cortex A9 Q/D/U/S Memory 1GB DDR3-Expandable upto 4GB 4GB eMMC Flash- Expandable upto 32GB On-Board Micro SD slot Optional SPI Flash* Optional NAND Flash* Expansion Connector - 100 Pins** **HDMI 1.4** MPI CSI & DSI MLB differential **RGMII** interface **ENET** interface **GPIOs Form Factor** 85mmx85mm MXM3 compatible **Power Input** 5V, 1A Typical

	Connector- 3	314 Pins	
PCle v	/2.0 x 1 Lane		
SATA	3.0 x 1 port		
Gigab	it Ethernet		
Dual I	_VDS ports		
USB 2	2.0 Host		
USB 2	2.0 OTG		
Audio	ports -3		
SD/SE	010/MMC ports-	3	
RGB i	nterface 24bit		
CAN a	ınd CSI -2		
MLB ,	SPDIF -1		
UART	, SPI -5		
I2C -3	}		
Memo	ory Bus, GPIOs		
Temp	erature		
	to +85°C		
Oper:	ating Systems	S	
Linux	3.0.35, Android	d 4.0.4	

Debug Support

Onboard JTAG header**

Note: device drivers provided are for specific interface chipsets which are used in iWave's carrier board

^{*}Optional features not supported by default


^{**} Not populated in mass production SOM







i.MX6 MXM Module BLOCK DIAGRAM

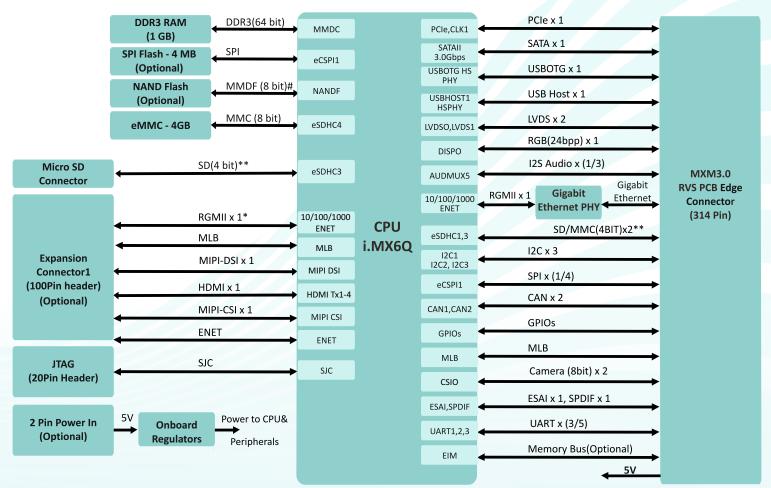

^{*} RGMII signals are shared with on board Gigabit Eth PHY & expansion connector

OS SUPPORT

Linux 3.0.35 Android 4.0.4* WEC7*

* Optional

DELIVERABLES

i.MX6 MXM SOM module Board support packages User manual

OPTIONAL KITS

RainboW-G15D-MXM (i.MX6 MXM Development Kit)

CUSTOM DEVELOPMENT

BSP Development/OS Porting Custom SOM/Carrier development Custom application/GUI development Design review and support

iWave Systems Technologies, established in 1999, focuses on Product Engineering Services involving Embedded Hardware, Software & FPGA. The company designs and develops cutting edge products and solutions. iWave has been an innovator in the development of highly integrated, high performance, low power and low cost System On Modules and Development Platforms. iWave's expertise has brought out multiple SOMs based on ARM, Freescale, Intel Atom, Marvell and TI Processors.

iWave Systems has won the confidence of its customers over the years by being a reliable partner in developing innovative products. Our engineers combine outstanding System design experience to deliver Quality Solutions. iWave specializes across Industrial, Automotive and Medical domains. We support our customers by being time efficient, which in turn helps our customers accelerate time to market their products. iWave is a Windows embedded Silver partner and a winner of the Partner Excellence Award.

Note: iWave reserves the right to change these specifications without notice as part of iWave's continuous effort to meet the best of breed specification. The registered trademarks are proprietary of their respective owners.

*Optional items not included in the standard deliverables

Ordering the i.MX6 MXM SOM

The board can be ordered online from the iWave Website http://www.iwavesystems.com/webforms

iWave Systems Tech. Pvt. Ltd.,

7/B, 29th Main, BTM Layout 2nd Stage, Bangalore-560076, India.
Ph:+91-80-26683700, 26786245
Email: mkto@iwayesystems.com

www.iwavesystems.com

iWave Japan, Inc.

8F-B, Kannai Sumiyoshi Building, 3-29, Sumiyoshi-cho, Naka-ku, Yokohama, Kanagawa, Japan. Ph: +81-45-227-7626 Email: info@iwavejapan.co.jp www.iwavejapan.co.jp

^{**} eSDHC3 port will be share uSD and MXM connector

[#] NAND Flash is optional & these signals are also routed to MXM connector & some of the signals are shared with eMMC