



S2A thru S2Y



DO-214AA(SMB)

General Purpose Rectifiers Glass Passivation Junction

Primary Characteristics		
I_F	2	A
V_{RRM}	50~2000	V
I_{FSM}	60	A
V_F	1.1 、 1.2 、 1.3	V
$T_J \text{ max}$	175	°C

Features

- High current capability
- High surge current capability
- Low reverse current
- Component in accordance to RoHS 2002/95/EC

Mechanical Data

- Cases: DO-214AA(SMB)
- Case Material: Molded Plastic. UL Flammability Classification Rating 94V-0
- Terminals: Lead free Plating (Tin Finish)
Solderable per MIL-STD-202, Method 208
- Polarity: Cathode Band
- Weight: 0.095 grams (approximate)

Ordering Information

Part No.	Remark	Package	Packing
S2x	General	SMB	3000 / Tape & Reel
S2x-H	Halogen Free		
S2x-Q	AEC-Q101 qualified		

Maximum Ratings (TA=25°C unless otherwise noted)

PARAMETER	SYMBOL	S2A	S2B	S2D	S2G	S2J	S2K	S2M	S2T	S2W	S2X	S2Y	UNIT
Maximum repetitive peak reverse voltage	V_{RRM}	50	100	200	400	600	800	1000	1300	1600	1800	2000	V
Maximum RMS voltage	V_{RMS}	35	70	140	280	420	560	700	910	1120	1260	1400	V
Maximum DC blocking voltage	V_{DC}	50	100	200	400	600	800	1000	1300	1600	1800	2000	V
Maximum average forward rectified current	I_F	2											A
Peak forward surge current, 8.3ms single half sine-wave superimposed on rated load	I_{FSM}	60											A
Maximum Instantaneous Forward Voltage $I_F=2A @ 25^\circ C$	V_F	1.1								1.2	1.3		V
Maximum DC Reverse Current @ TA=25°C at Rated DC Blocking Voltage @ TA=100°C	I_R	5 100											uA
Typical Junction Capacitance(NOTE1)	C_j	10											pF
Typical Thermal Resistance	$R_{\theta JC}$	40											°C/W
Operating Temperature Range	T_J	-55 to +175											°C
Storage Temperature Range	T_{STG}	-55 to +175											°C
Marking Code		S2A	S2B	S2D	S2G	S2J	S2K	S2M	S2T	S2W	S2X	S2Y	

NOTES:

1.Measured at 1.0MHZ and applied reverse voltage of 4.0V DC



General Purpose Rectifiers Glass Passivation Junction

Rating and Characteristics Curves

FIG. 1-Typical Forward Current Derating Curve

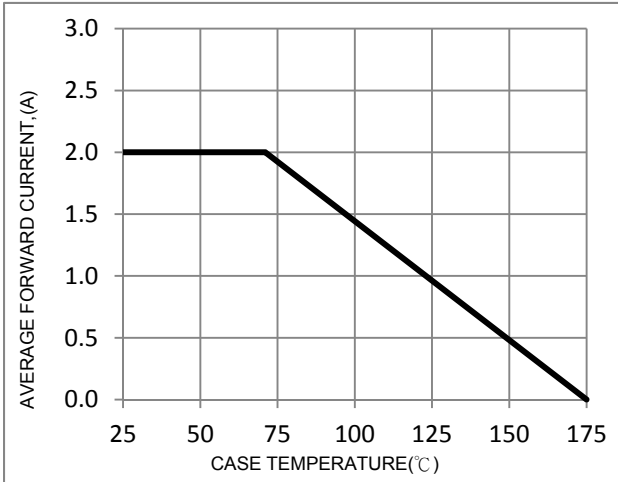


FIG. 2-Typical Forward Characteristics

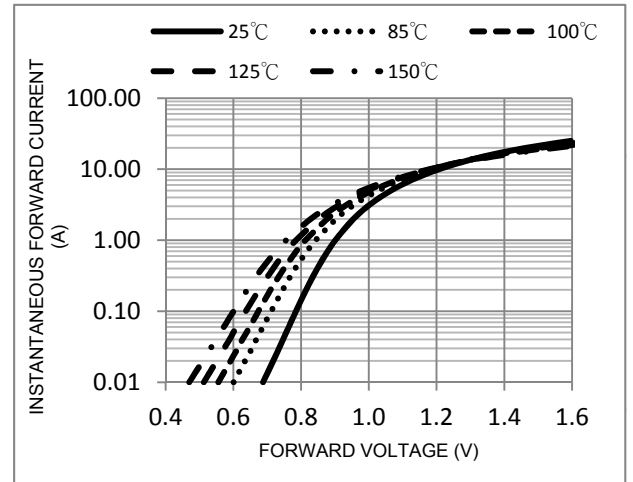


FIG. 3-Maximum Non-Repetitive Forward Surge Current

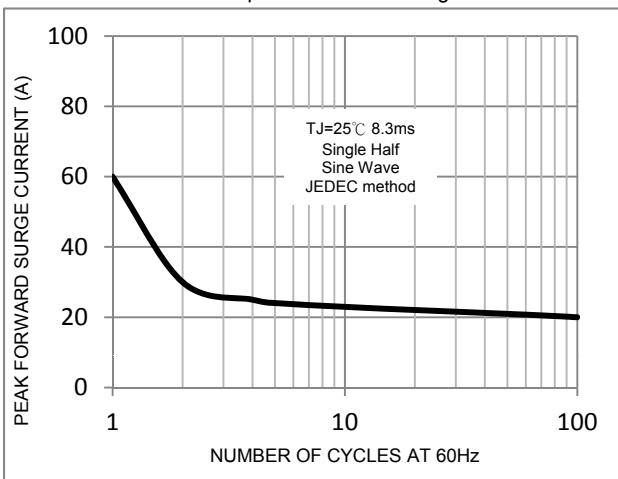


FIG. 4-Typical Reverse Characteristics


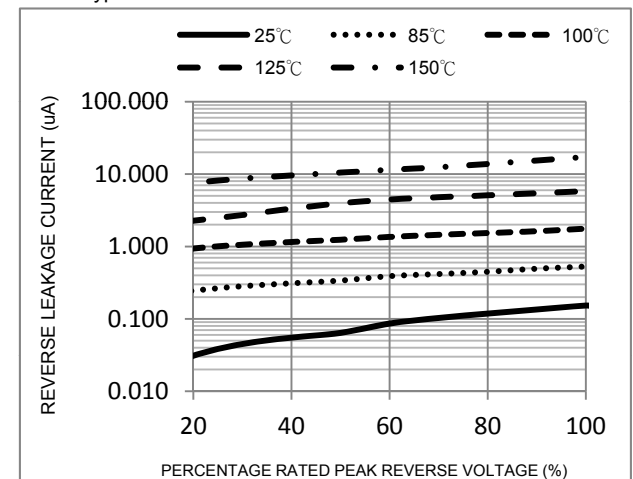


FIG. 5-Typical Junction Capacitance






S2A thru S2Y

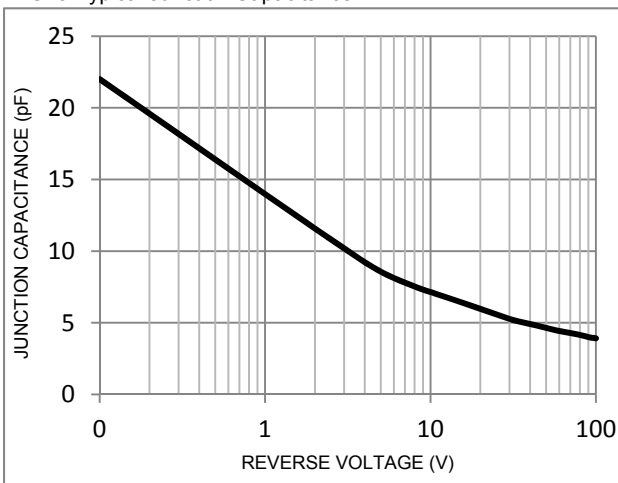

General Purpose Rectifiers Glass Passivation Junction


Package Outline Dimensions

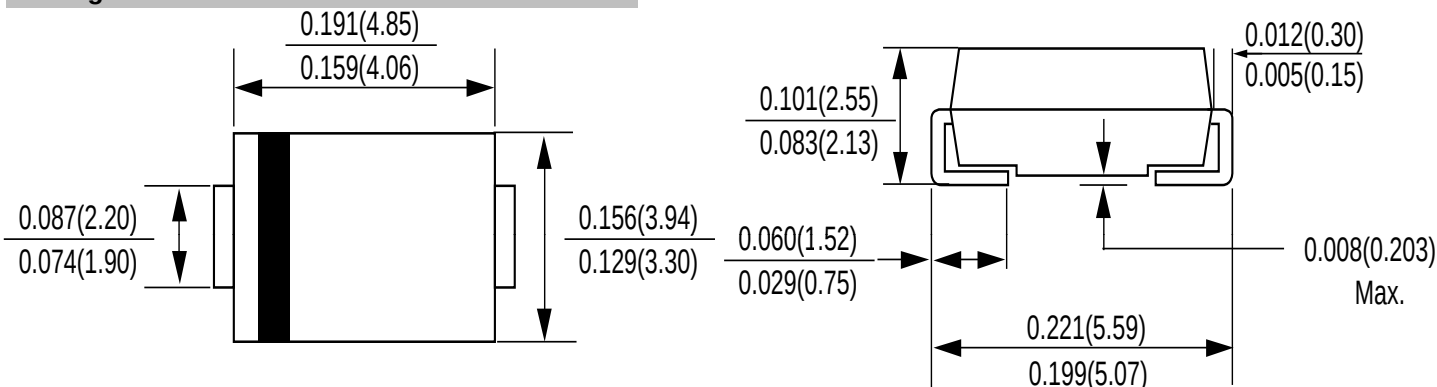

DO-214AA(SMB)


Dimensions in inches and (millimeters)

Marking Information

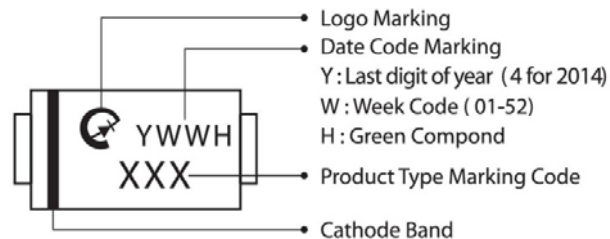

Suggested Pad Layout

Dimension	Outline	SMB (DO-214AA)
A		6.80
B		1.80
C		2.30
D		2.50
E		4.30



Tap & Reel Specification

ITEM	SYMBOL	SMB(mm) DO-214AA
Carrier width	A	4.0(max)
Carrier length	B	5.9(max)
Carrier depth	C	3.0(max)
Sprocket hole	d	1.50±0.1
Reel outside diameter	D	330±2.0
Feed hole diameter	D0	13.5±1
Reel inner diameter	D1	50 (min.)
Sprocket hole position	E	1.75±0.1
Punch hole position	F	5.5±0.05
Sprocket hole pitch	P	8.0±0.1
Sprocket hole pitch	Po	4.0±0.1
Embossment center	P1	2.0±0.05
Overall tape thickness	T	0.6 (max)
Tape width	W	12.0±0.3
Reel width	W2	18.4 (max)
Reel width	W1	14.4 (max)

