



SOT-223

TO-252-3L

TO-220F-3L

ORDERING INFORMATION

Product	Marking	Package
S78DMxxQ	S78DMxx	SOT-223
S78DMxxD	S78DMxx	TO-252-3L
S78DMxxPI	S78DMxx	TO-220F-3L

▲ Marking Detail Information

[SOT-223 PKG Marking]

S78DMxx (①)
GYWW(②)

① Device Code

② Grade & Year & Week Code

[TO-220F-3L & TO-252-3L PKG Marking]

AUK(①)
G△YWW (②)
S78DMxx (③)

① AUK Logo

② Grade & M Code & Year & Week Code

③ Device Code

S78DMxxx

Low Dropout Voltage Regulator (0.5A Series)

Description

The S78DMxxx is an efficient linear low dropout voltage regulator for various electronic equipment. It is designed to provide very low dropout voltage, and better than 2.4% output voltage accuracy.

And the S78DMxxx has various key features such as current limiting, over temperature shut-down, over voltage protection, and low noise performance with an low noise option.

Furthermore, it is available in adjustable or fixed output voltages in SOT-223, TO-252-3L and TO-220F-3L packages.

Application


- ◆ Consumer and personal electronics
- ◆ SMPS post-regulator / dc-to-dc modules
- ◆ High-efficiency linear power supplies

Features and Benefits


- ◆ Low Dropout Voltage for 0.5A Output : [Max. 500mV].
- ◆ Built in Thermal shut down circuit.
- ◆ Built in OVP, CLP circuit.
- ◆ Low Quiescent Current : [Typ. 2.0mA]
- ◆ Ultra High level of ESD [Built in ESD Protection Cell]

MM : 400V ↑ / HBM 3KV ↑


Equivalent Circuit

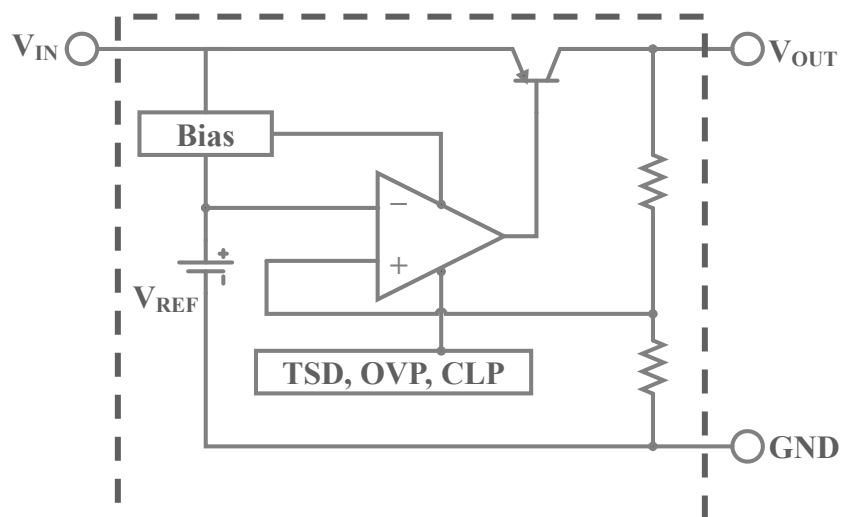


◆ Pin Configuration

**SOT-223**

1: V_{IN}
 2: GND
 3: V_{OUT}
 4: GND

**TO-252-3L**

1: V_{IN}
 2: GND
 3: V_{OUT}
 4: GND

**TO-220F-3L**

1: V_{IN}
 2: GND
 3: V_{OUT}

◆ Product Line-up

Product Name	V_{OUT}	Operating Temperature	Package
S78DM15Q	1.5V	-30~125°C	SOT-223
S78DM18Q	1.8V		
S78DM25Q	2.5V		
S78DM33Q	3.3V		
S78DM50Q	5.0V		
S78DM90Q	9.0V		
S78DM120Q	12.0V		
S78DM15D	1.5V	-30~125°C	TO-252-3L
S78DM18D	1.8V		
S78DM25D	2.5V		
S78DM33D	3.3V		
S78DM50D	5.0V		
S78DM90D	9.0V		
S78DM120D	12.0V		
S78DM15PI	1.5V	-30~125°C	TO-220F-3L
S78DM18PI	1.8V		
S78DM25PI	2.5V		
S78DM33PI	3.3V		
S78DM50PI	5.0V		
S78DM90PI	9.0V		
S78DM120PI	12.0V		

◆ **Absolute Maximum Ratings (Ta = 25°C)**

Parameter		Symbol	Limits	Unit
Input Voltage		V _{IN}	23.0	V
Power Dissipation	SOT-223	P _d	1.0(Note1)	W
	TO-252-3L		1.3(Note2)	
	TO-220F-3L		2.0(Note2)	
Junction Temperature		T _J	150	°C
Operate Temperature Range		T _{opr}	-30 ~ +125	°C
Storage Temperature Range		T _{stg}	-55 ~ +150	°C

Note 1 : Mount on a glass epoxy circuit board of 36x18mm pad dimension of 50mm²

Note 2 : No Heat-Sink

Absolute maximum ratings indicate limits beyond which damage to the component may occur. Electrical specifications do not apply when operating the device outside of its operating ratings. The maximum allowable power dissipation is a function of the maximum junction temperature, T_{J(max)}, the junction-to-ambient thermal resistance, θ_{JA} , and the ambient temperature, T_A.

The maximum allowable power dissipation at any ambient temperature is calculated using:

$PD(max) = (T_{J(max)} - T_A) \div \theta_{JA}$. Exceeding the maximum allowable power dissipation will result in excessive die temperature, and the regulator will go into thermal shutdown.

◆ **Guaranteed Operating Conditions (Ta = 25°C)**


Parameter	Symbol	Limits	Unit
Supply Input Voltage	V _{IN}	V _O +0.5~20	V
Output Current	I _{OUT}	0.5	A

◆ Electrical characteristics

($V_{IN}=V_{OUT}+1.0V$, $C_{IN}=0.33\mu F$, $C_{OUT}=47\mu F$, $I_{OUT}=5mA$, $T_J=25^\circ C$; unless noted)

NO	Characteristics		Symbol	Condition	Specification			Unit
					MIN.	TYP.	MAX.	
1	Output Voltage	S78DM15	V_{OUT}	Variation from nominal V_{OUT}	1.47	1.50	1.53	V
		S78DM18			1.764	1.80	1.836	
		S78DM25			2.450	2.50	2.550	
		S78DM33			3.234	3.30	3.366	
		S78DM50			4.90	5.0	5.10	
		S78DM90			8.82	9.0	9.18	
		S78DM120			11.76	12.0	12.24	
2	Line Regulation		V_{LINE}	$V_{IN}=V_{OUT}+1V$ to $7V$, $I_{OUT}=5mA$	-	0.05	0.5	%
3	Load Regulation		V_{LOAD}	$V_{IN}=V_{OUT}+1V$, $I_{OUT}=5mA$ to $0.5A$	-	0.1	1.0	%
4	Quiescent Current		I_{QC}	$V_{IN}=V_{OUT}+1V$ to $20V$, $I_{OUT}=0mA$	-	2.0	5.0	mA
5	Ripple Rejection		$R \cdot R$	$I_{OUT}=50mA$, $f=120Hz$	55.0	65.0	-	dB
6	Output Noise Voltage		V_{NO}	$V_{IN}=V_{OUT}+1V$, $I_{OUT}=50mA$, $10Hz \leq f \leq 100kHz$	-	100	-	μV_{rms}
7	Dropout Voltage		V_{DROP}	$I_{OUT}=0.5A$ (S78DM15)	-	-	0.7	V
				$I_{OUT}=0.5A$ (Except S78DM15)	-	-	0.5	
8	Current Limit		I_{LIMIT}	$V_{IN}=V_{OUT}+1V$	1100	1300	-	mA

Typical Application

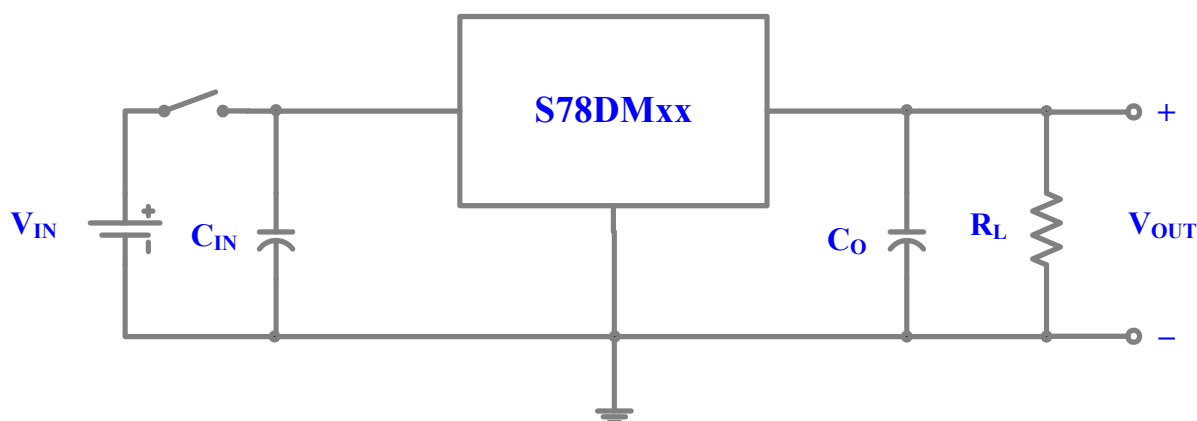

- 1) C_{IN} should be required if regulators are located far from power supply filter
- 2) C_O improves output stability and transient response ($C_O \geq 47\mu F$)





Fig1. $I_{QC} - T_J$ Fig2. $V_{OUT} - T_J$ Fig3. $V_{OUT} - V_{IN}$ Fig4. $V_{OUT} - T_J$ 




Fig5. $V_{OUT} - I_{OUT}$ Fig6. $V_{OUT} - T_J$ Fig7. $V_{DROP} - T_J$ 

Fig.8 Line Transient Response




Fig.9 Line Transient Response

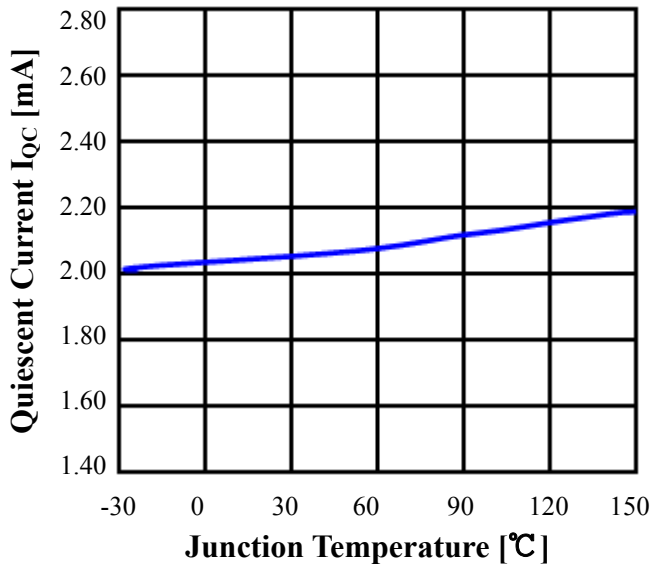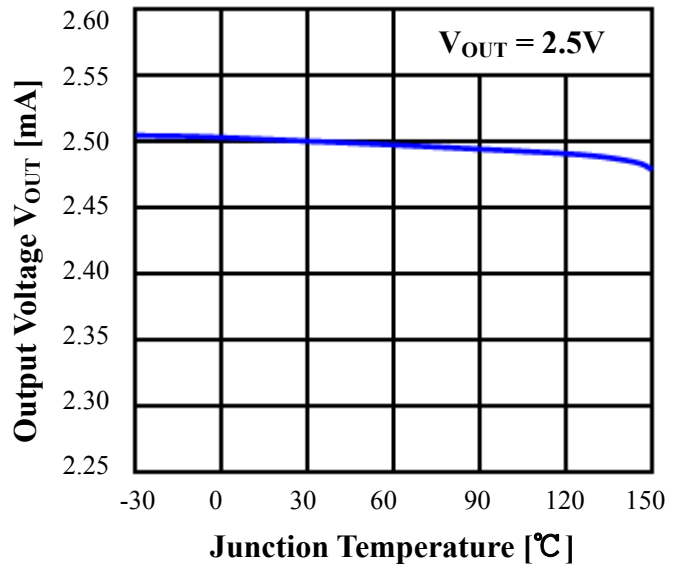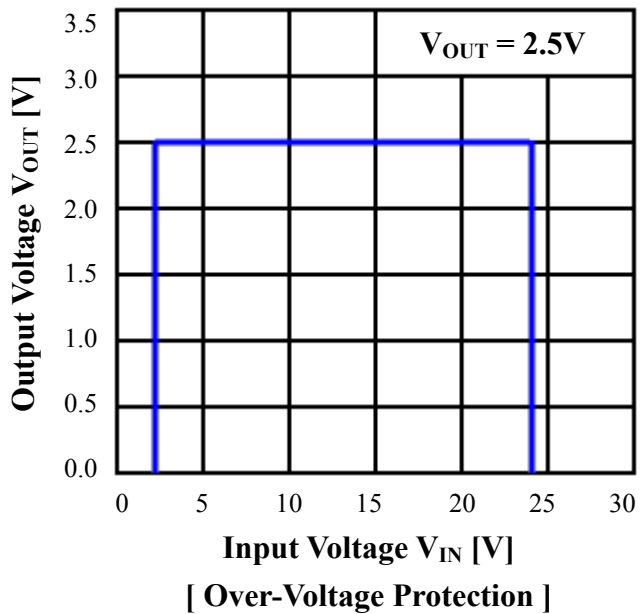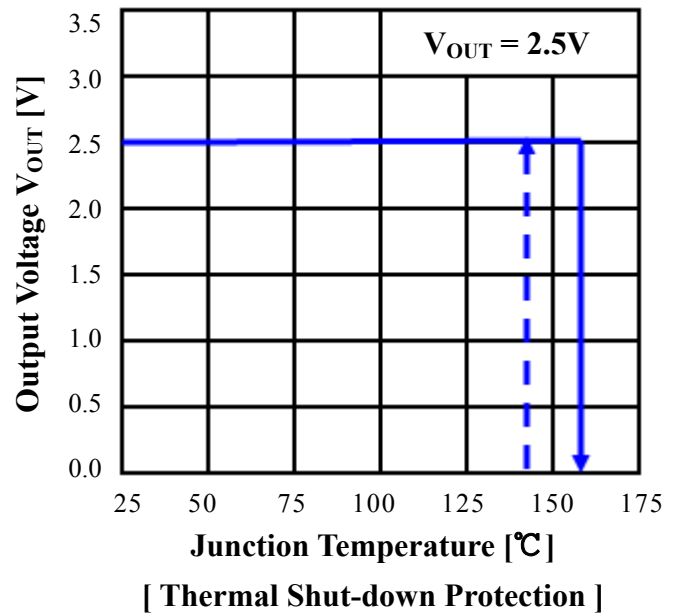


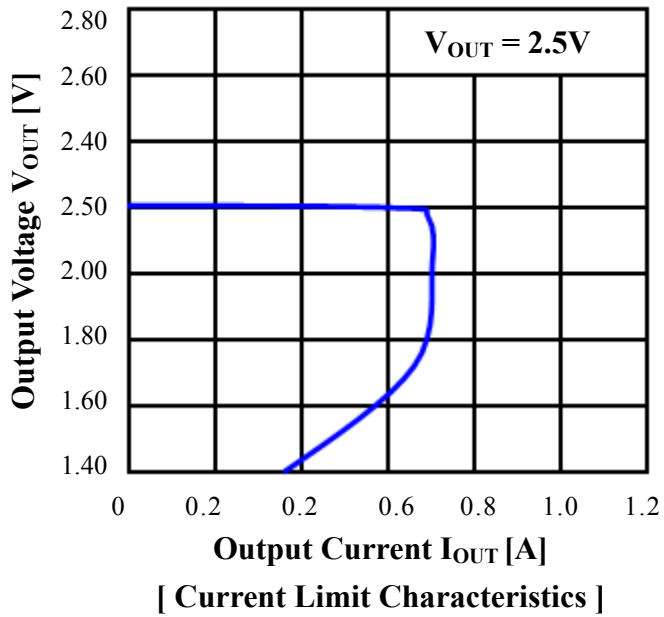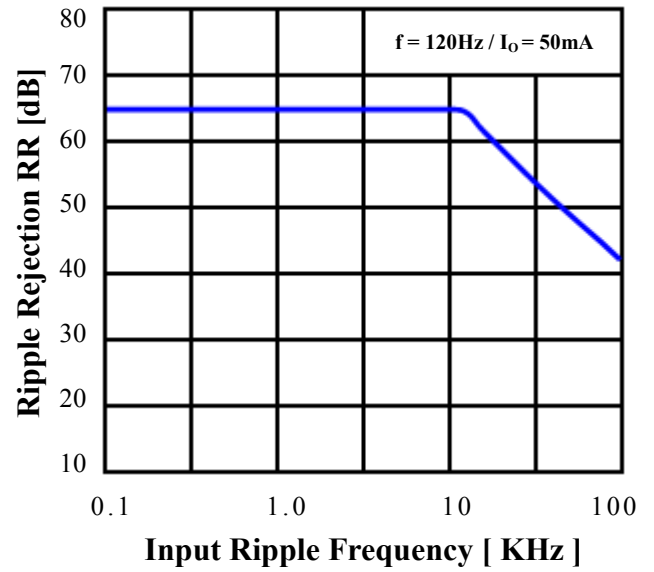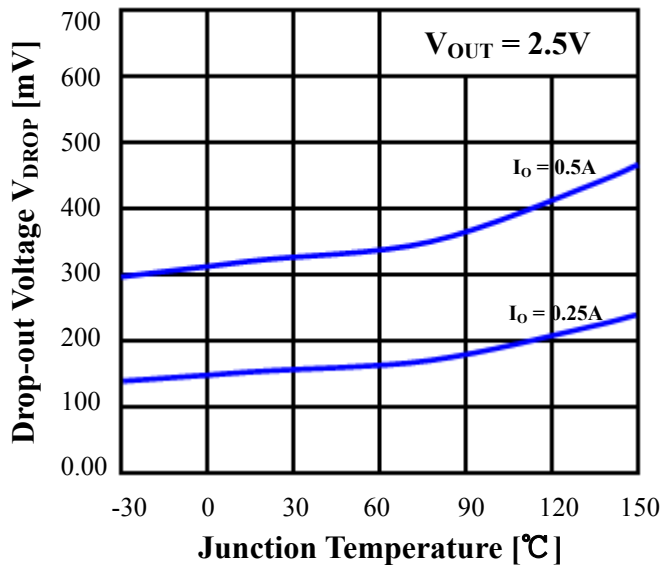Fig.10 Load Transient Response



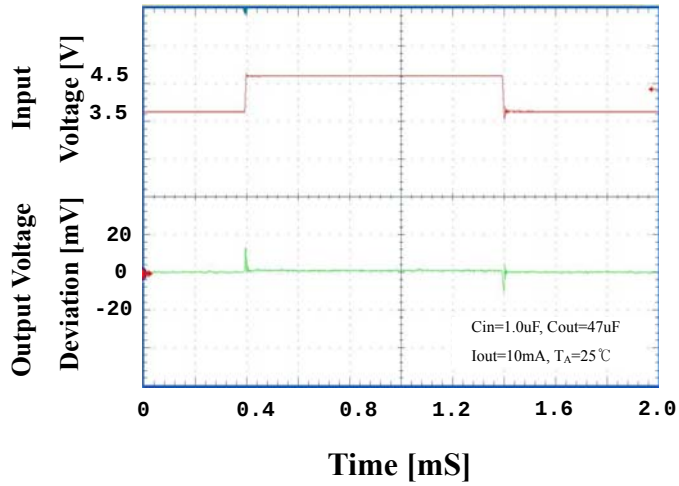


Fig.11 Load Transient Response

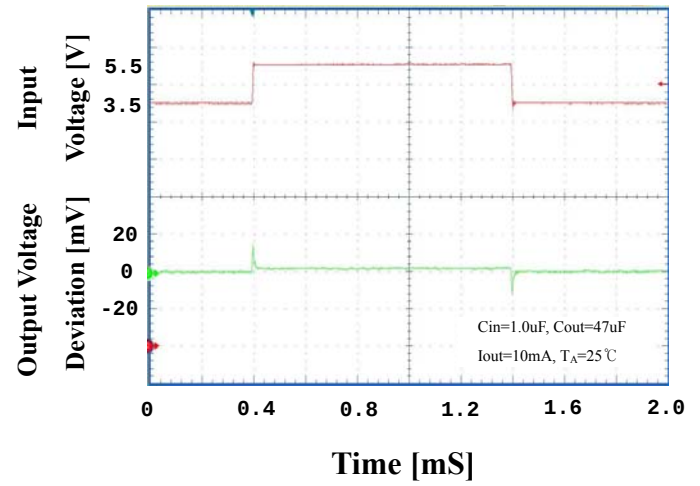


◆ SOT-223 Outline Dimension (Unit : mm)

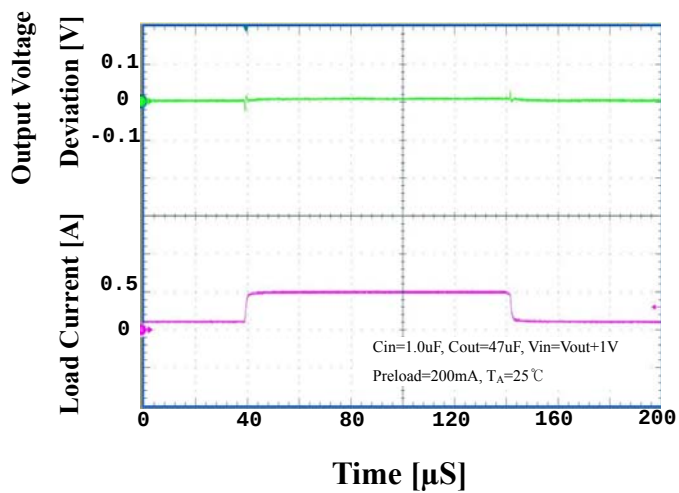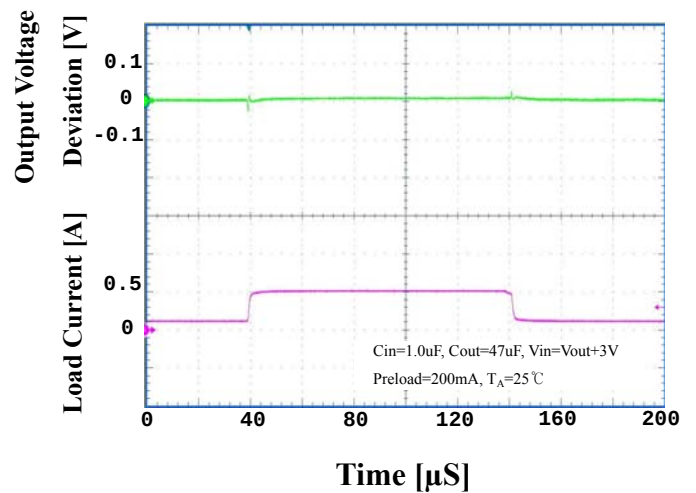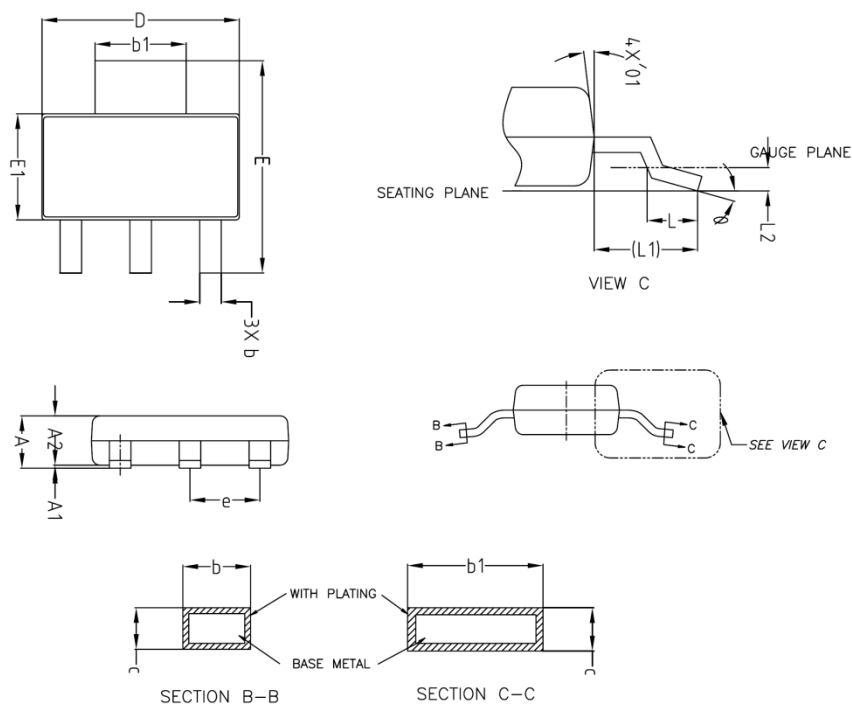


SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	—	—	1.80	
A1	0.00	—	0.10	
A2	1.60	1.65	1.70	
b	0.68	—	0.76	
b1	2.95	—	3.07	
c	0.23	—	0.28	
D	6.40	6.50	6.60	
E	6.80	7.00	7.20	
E1	3.40	3.50	3.60	
e	2.30 BSC			
L	0.45	—	0.65	
L1	1.75 REF			
L2	0.10 BSC			
θ	0°	—	10°	
θ1	5°	—	10°	

※ Recommend PCB solder land [Unit: mm]

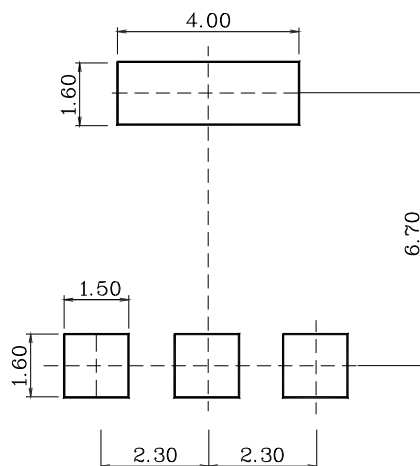


◆ TO-252-3L Outline Dimension (Unit : mm)


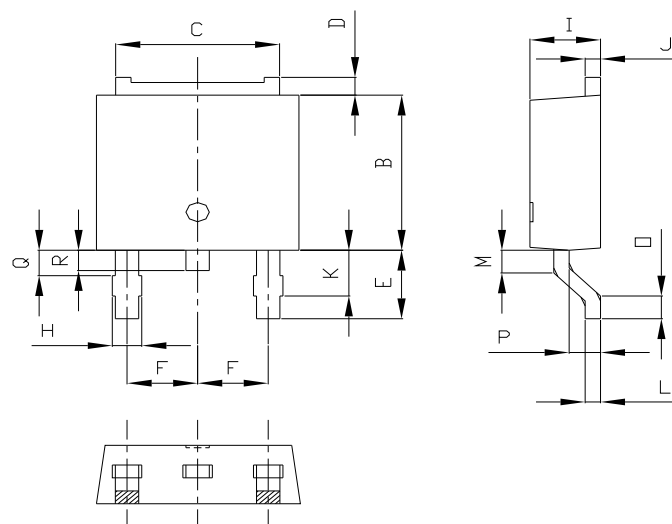


SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	6.40	6.60	6.80	
B	5.90	6.10	6.30	
C	5.04	5.34	5.64	
D	0.50	0.70	0.90	
E	2.50	2.70	2.90	
F	2.10	2.30	2.50	
H	0.96 MAX			
I	2.20	2.30	2.40	
J	0.40	0.50	0.60	
K	1.60	1.80	2.00	
L	0.40	0.50	0.60	
M	0.81	0.91	1.01	
O	0.80	0.90	1.00	
P	0.90	1.00	1.10	
Q	0.95 MAX			
R	0.60	0.80	1.00	



※ Recommend PCB solder land [Unit: mm]

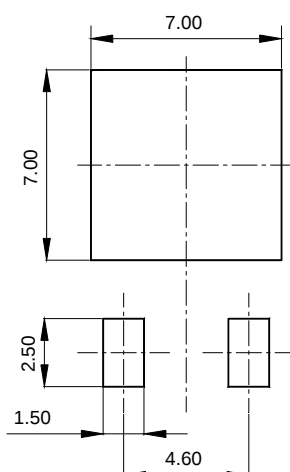

◆ TO-220F-3L Outline Dimension (Unit : mm)

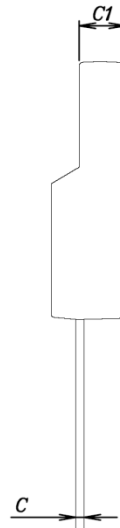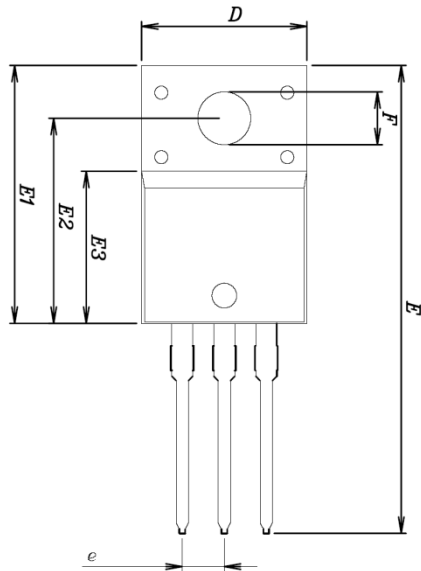

SYMBOL	MILLIMETERS			NOTE
	MINIMUM	NOMINAL	MAXIMUM	
A	—	—	4.60	
A1	2.45	2.50	2.55	
A2	1.95	2.00	2.05	
b	0.65	0.75	0.85	
b1	1.07	1.27	1.47	
C	0.40	0.50	0.60	
C1	2.70	2.80	2.90	
D	9.90	10.00	10.10	
E	28.00	—	28.60	
E1	15.50	15.60	15.70	
E2	12.30	12.40	12.50	
E3	9.15	9.20	9.25	
F	3.10	3.20	3.30	
G	3.30	3.40	3.50	
e	2.54 BSC			
L	12.40	—	13.00	
L1	3.46 BSC			

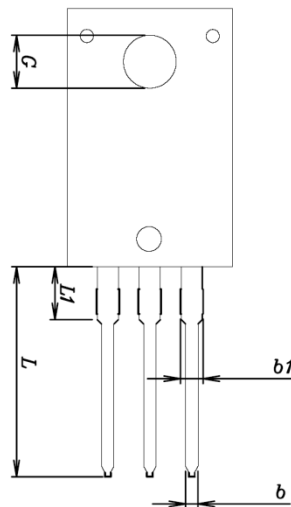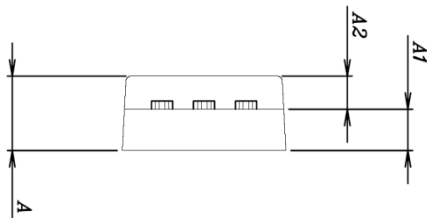

The AUK Corp. products are intended for the use as components in general electronic equipment (Office and communication equipment, measuring equipment, home appliance, etc.).

Please make sure that you consult with us before you use these AUK Corp. products in equipments which require high quality and / or reliability, and in equipments which could have major impact to the welfare of human life(atomic energy control, airplane, spaceship, transportation, combustion control, all types of safety device, etc.). AUK Corp. cannot accept liability to any damage which may occur in case these AUK Corp. products were used in the mentioned equipments without prior consultation with AUK Corp..

Specifications mentioned in this publication are subject to change without notice.