




SA1861

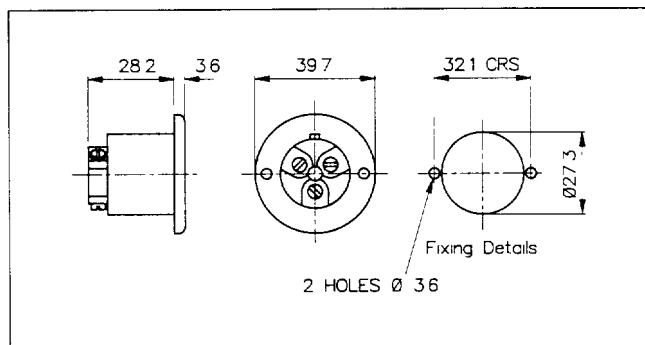

SA2111

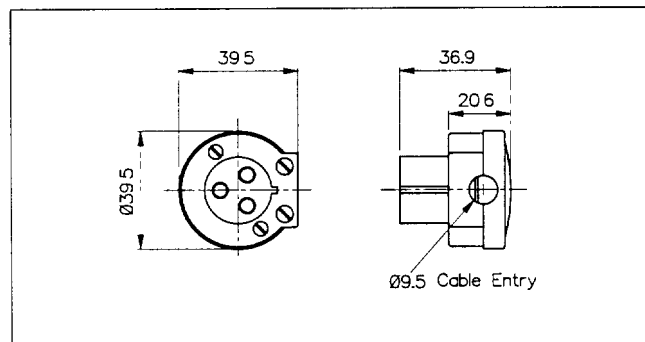

3/4 - 006
018

ORIG



Data	List No	SA1861	SA2111	
Terminations:		Screw terminals	Screw terminals	
Max. Rating:		5A. 250V a.c	5A 250V a c	
Contact Resistance:		<10m Ω	<10m Ω	
Insulation Resistance:		>10 ⁴ M Ω	>10 ⁴ M Ω	
A.C. Breakdown:		Pole-Pole 4.6kV Poles-Panel 9 2kV	Pole-Pole 4.6kV. Poles-Accessible Parts 2kV.	
Operating Temp. Range:		-20°C to +70°C	-20°C to +70°C.	
Mouldings:		Phenolic.	Phenolic.	
Contacts:		Sockets. Brass, Nickel Plated.	Sockets: Brass, Nickel Plated	
Accessories:		PNo 8878 (see page 93)		
Mates With:		SA2111	SA1861	