

SBU4A~SBU4M

SILICON SINGLE-PHASE BRIDGE RECTIFIER

VOLTAGE	50 to 1000 Volts	CURRENT	4.0 Amperes
----------------	-------------------------	----------------	--------------------


SBU	Unit: inch (mm)
------------	-------------------

FEATURES

- Plastic material has Underwriters Laboratory Flammability Classification 94V-O
- Ideal for printed circuit board
- Reliable low cost construction utilizing molded pastic technique.
- High temperature soldering guaranteed:
260°C/10 seconds/.375"(9.5mm) lead length at 5 lbs. (2.3kg) tension
- In compliance with EU RoHS 2002/95/EC directives

MECHANICAL DATA

- Case: Reliable low cost construction utilizing
- molded plastic technique
- Terminals: Leads solderable per MIL-STD-750, Method 2026
- Mounting position: Any
- Mounting torque: 5 in. lb. Max.
- Weight: 0.2 ounce, 5.6 grams

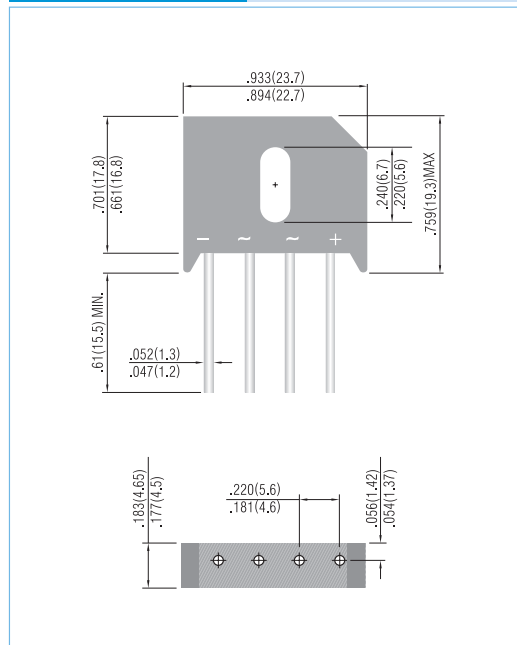

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25°C ambient temperature unless otherwise specified. Resistive or inductive load, 60Hz.
For Capacitive load derate current by 20%.

PARAMETER	SYMBOL	SBU4A	SBU4B	SBU4D	SBU4G	SBU4J	SBU4K	SBU4M	UNITS
Maximum Recurrent Peak Reverse Voltage	V_{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Bridge Input Voltage	V_{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V_{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward $T_C=100^\circ\text{C}$ Rectified Output Current at $T_A=40^\circ\text{C}$	$I_{F(AV)}$	4.0							A
f t Rating for fusing ($t < 8.3\text{ms}$)	f t	166							A ² sec
Peak Forward Surge Current single sine-wave superimposed on rated load (JEDEC method)	I_{FSM}	200							Apk
Maximum Forward Voltage Drop per Bridge Element at 4.0A	V_F	0.98							Vpk
Maximum Reverse Leakage Current at Rated @ $T_A=25^\circ\text{C}$ Dc Blocking Voltage @ $T_A=100^\circ\text{C}$	I_R	3.0 1000							uA
Typical Thermal Resistance per leg (Note 2) Typical Thermal Resistance per leg (Note 3)	$R_{\theta JA}$ $R_{\theta JC}$	17.5 3.1							°C/W
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 to + 150							°C

NOTES:

- Recommended mounting position is to bolt down on heatsink with silicone thermal compound for maximum heat transfer with #6 screw.
- Units Mounted in free air, no heatsink, P.C.B at 0.375"(9.5mm) lead length with 0.5 x 0.5"(12 x 12mm) copper pads.
- Units Mounted on a 2.0 x 1.6" x 0.3" thick (5 x 4 x 0.8cm) AL plate.

SBU4A~SBU4M

RATING AND CHARACTERISTIC CURVES

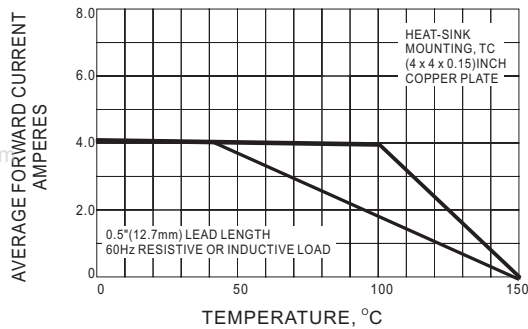


Fig.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

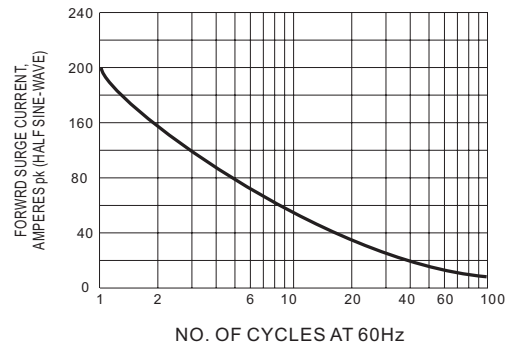


Fig.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

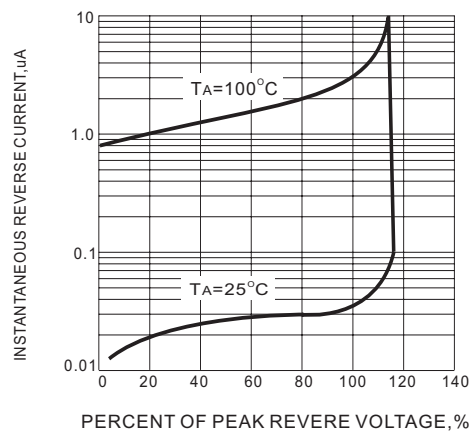


Fig.3 - TYPICAL REVERSE CHARACTERISTICS

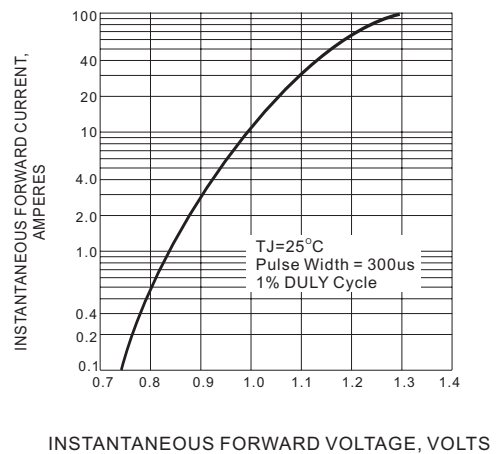


Fig.4 - TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER ELEMENT

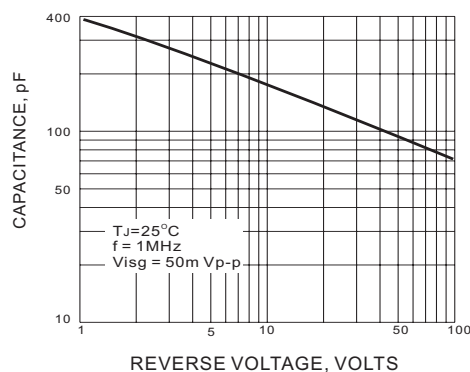


Fig.5 - TYPICAL JUNCTION CAPACITANCE