

Preliminary Information

DESCRIPTION

SC1010 is a solid state relay controller card. It is intended to be used in applications where high reliability is needed.

This card is configurable to trigger SCR's with 20kHz pulse trains synchronised with mains voltage or in permanent mode. It can be configured to start at zero crossing or random phase.

Control signal can be logic level refereed to card reference (high input impedance) or floating optocoupled input (low input impedance).


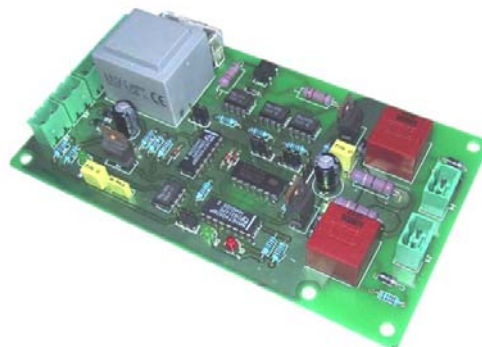


Photo non-contractual

Built in power supply is feed directly from the mains either 230 V or 400 V, 50 Hz.

DIMENSIONS

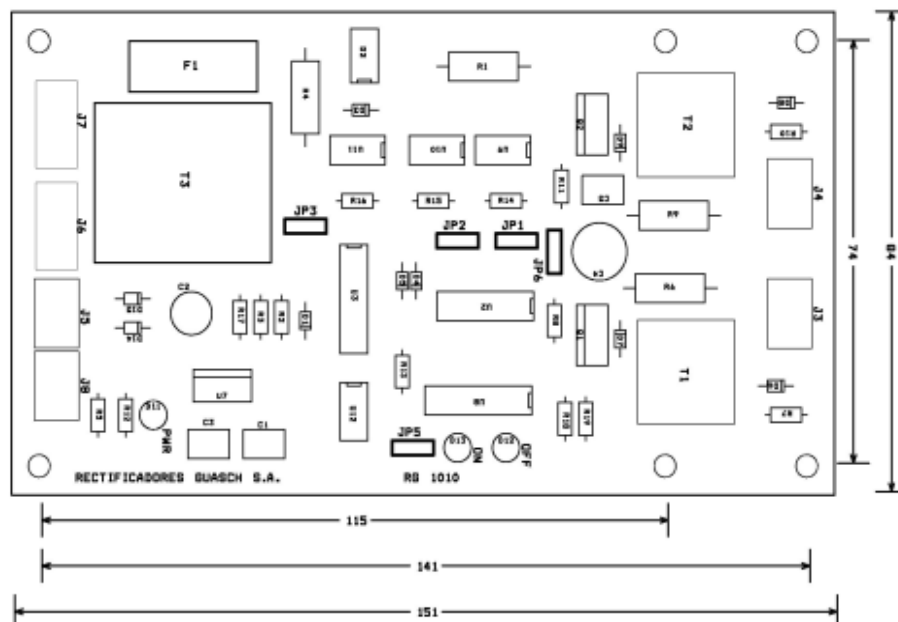


Dimensions and component situation

OPERATION GATE SIGNAL MODES

Regarding gate signals, the board can operate in two different modes; «Synchronous Pulse Train» or «Permanent Pulse Train». Operation mode is jumper selectable by means of JP1 and JP2.

- Synchronous pulse train mode.


When in synchronous pulse train mode the board produces 20 kHz pulse trains synchronised and in phase with the mains voltage for each SCR. This operation mode is recommended since commutation and gate losses are reduced.

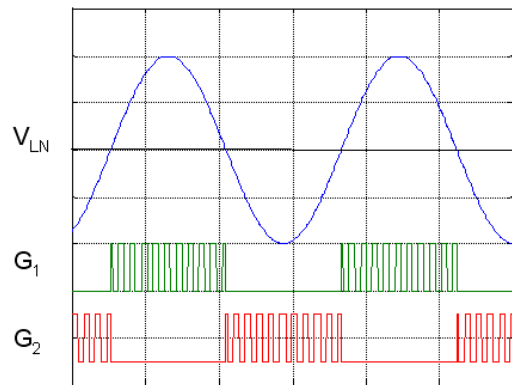

Gate pulses in synchronous pulse train mode

- Permanent pulse train mode.

When in permanent pulse train mode the board produces a 20 kHz pulse signal for each SCR. Gate losses are higher than for «synchronous pulse train» mode.

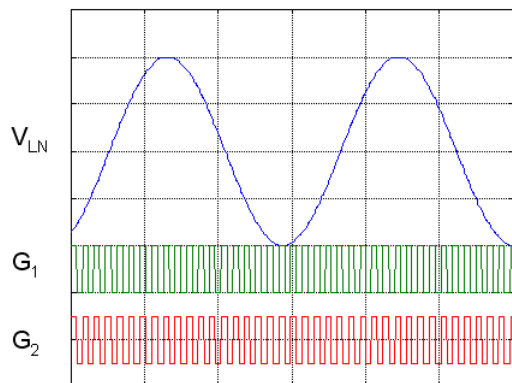

Gate pulses in permanent pulse train mode

JP1	JP2	Synchronous pulse train mode
JP1	JP2	Permanent pulse train mode

Pulse train mode selection jumper

080926 Rev.:0

STARTING MODES


Regarding starting, the board can operate in two different modes; «Zero crossing start» or «Random phase start». Start mode is jumper selectable by means of JP3.

Starting mode only affects at the first cycle after a start control signal is applied.

- Zero crossing start mode.

www.DataSheet4U.com


When in «zero crossing» start mode, first cycle of load voltage always start at zero cross of the mains voltage.

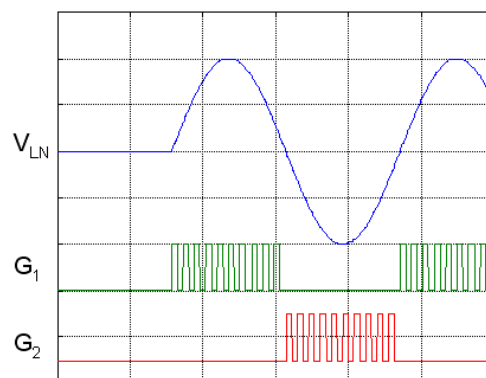

Gate pulses and load voltage in «zero crossing start» mode

- Random phase start mode

When in «random phase» start mode, voltage is applied to the load at the moment that control signal is applied.

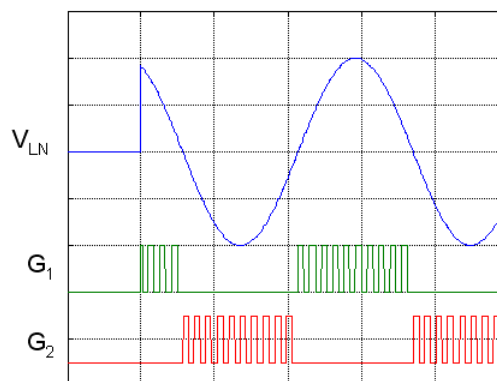

Gate pulses and load voltage in «random phase start» mode

JP3 	Zero crossing start
JP3 	Random phase start

Start mode selection jumper

CONTROL SIGNAL

Input type of control signal is jumper selectable between «logic level» or opto-isolated.

Logic level input is intended to be controlled directly from a logic signal source (PLC, microcontroller, etc.). It is advised logic level circuits are high impedance, so attention must be paid to avoid undesirable interference. Shielded lines must be used for control signals.


Opto-isolated mode requires a control signal source capable of deliver at least 5mA at 15V. In this mode 5.22k Ω input impedance helps to prevent interference influence, nevertheless shielding is suggested.

A mechanical external switch can be used but optocoupled input mode must be selected since a high impedance open circuit can produce undesirable operation. Since the switch is feeded form internal power suply, isolation is not achievable in this mode.

JP5 	Opto coupled input
JP5 	Logic level input

Jumper selection

CONTROL SIGNAL WIRING

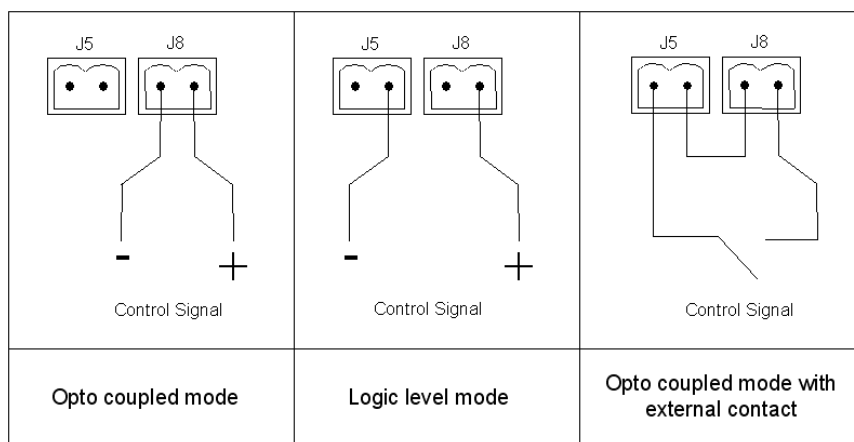

CONTROL SIGNAL LEVEL


	Opto coupled mode	Logic level mode
ON state	8 - 30 V	9 - 12 V
OFF state	0 - 3 V	0 - 3 V

080926 Rev:0

SYNCHRONISM SIGNAL

Synchronous pulse train mode requires to detect line-neutral mains voltage, this must be connected to J7 connector. See complete connection diagram at the end of application manual.


MAXIMUM VOLTAGE FOR SYNCHRONISM SIGNAL IS 400 Vrms !!!




INTERNAL SUPPLY POWER

www.DataSheet4U.com

Internal supply is feed at 230 V or 400 V 50 Hz. Power must be connected to J6 connector.




BOARD COMPONENTS

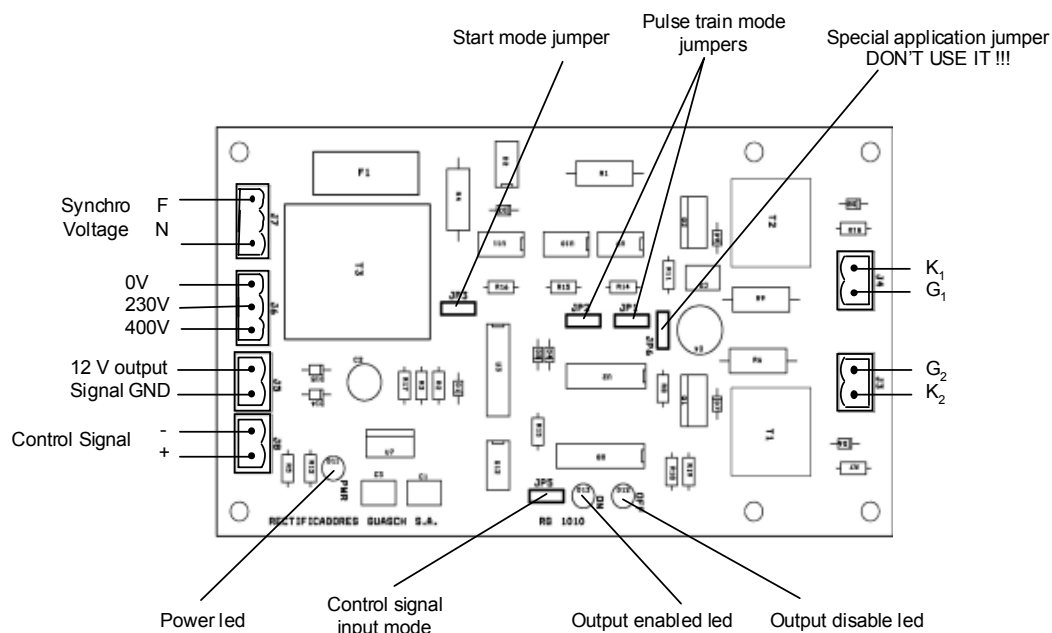

080926 Rev.:0

Reserves the right to change limits, test conditions and dimensions given in this data sheet at any time without previous notice.

APPLICATION EXAMPLE

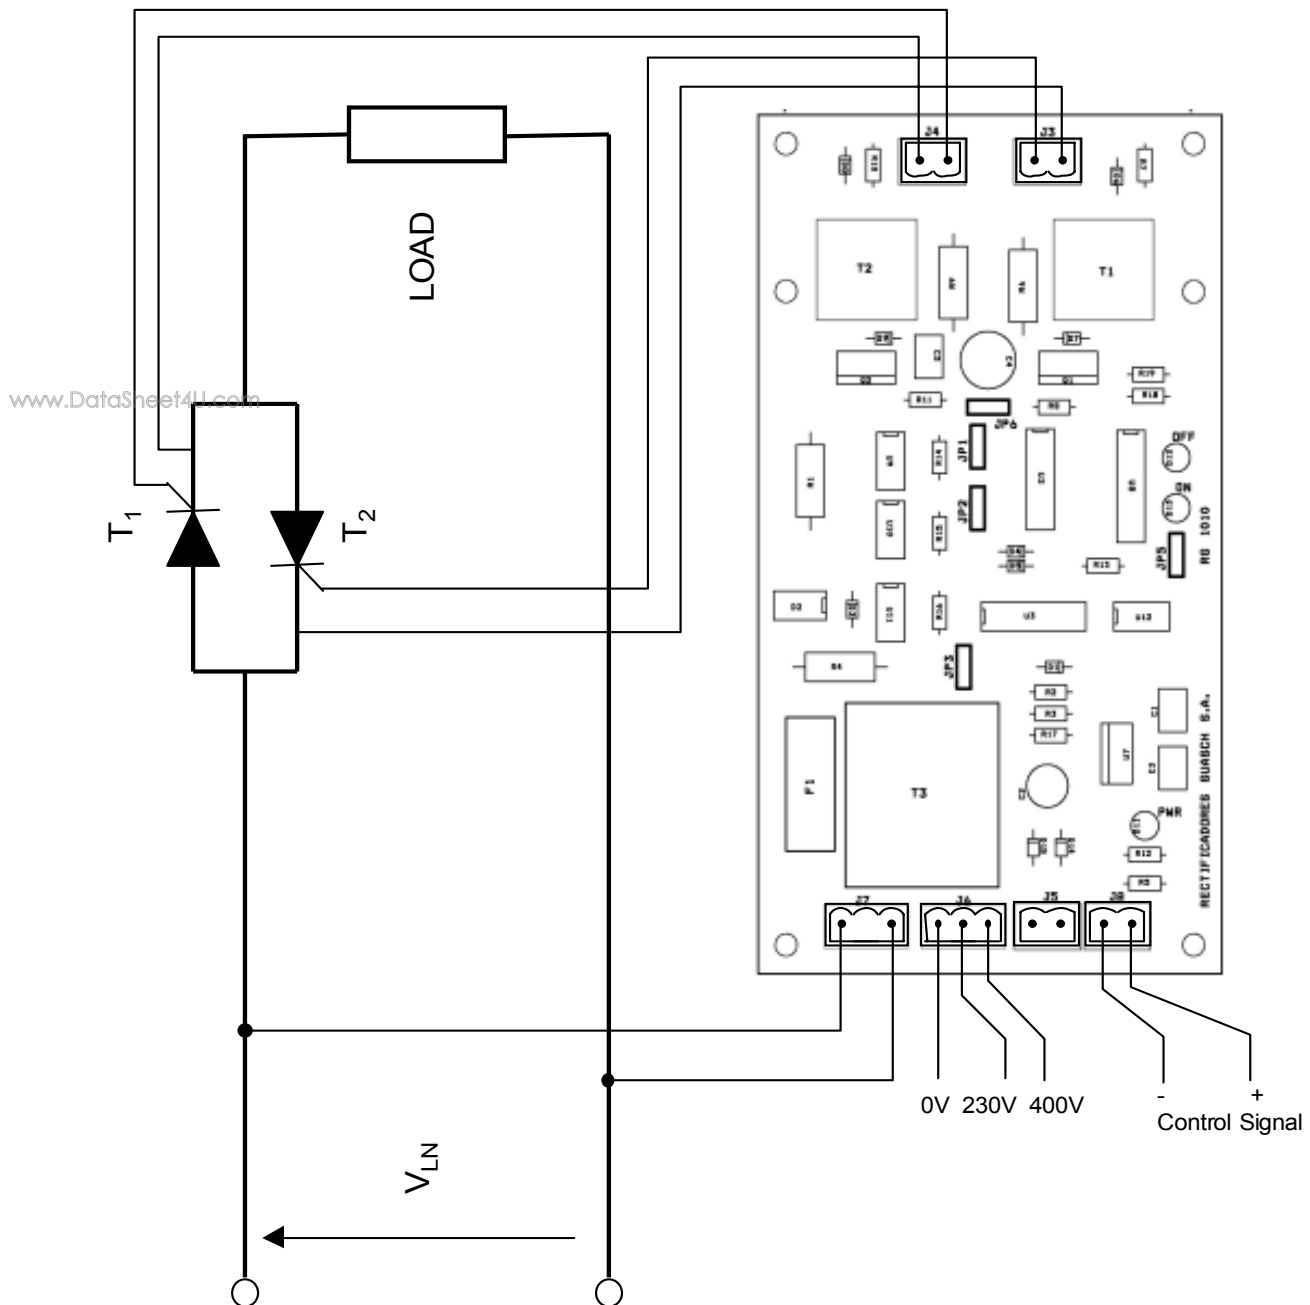

ORDERING INFORMATION

Order the standard version as SC1010

A high voltage version, capable to operate at 700 Vrms, is available on request (SC1010H).

080926 Rev.:0

Reserves the right to change limits, test conditions and dimensions given in this data sheet at any time without previous notice.

Cost Effective Products

SEMICODE ELECTRONICA

offers to the market a comprehensive range of products from recognized manufacturers at the best price/quality relationship, this products are provided with a basic reference code that allows maintaining the same product reference even if the original device manufacturer is replaced. SEMICODE product reference has to be considered as a generic brand.

Seeking the market needs and trends, we are constantly increasing the product portfolio with new products and suppliers, please ask for the updated information available to our local contacts.

SEMICODE products include semiconductors, passive components and accessories focused in power electronics market.

Datasheet Annotations:

SEMICODE ELECTRONICA annotate datasheets in the top left hand corner of the front page, to indicate product status. The annotations are as follows:

Tentative information: This is the most tentative form of information and represents a very preliminary specification. No actual design work on the product has been started.

Preliminary Information: The product is in design and development. The datasheet represents the product as it is understood but details may change.

Advance Information: The product design is complete and final characterisation for volume production is well in hand.

No Annotation: The product parameters are fixed and the product is available to datasheet specification.

NOTICE: The technical data are to specify components, not to guarantee their properties.No warranty or guarantee expressed or implied is made regarding delivery or performance. The Company reserves the right to alter without prior notice the specification of any product. Information concerning possible methods of use is provided as a guide only and does not constitute any guarantee that such methods of use will be satisfactory in a specific piece of equipment. It is the user's responsibility to fully determine the performance and suitability of any equipment using such information and to ensure that any publication or data used is up to date.

All brand names and product names used in this publication are trademarks, registered trademarks or trade names of their respective owners.

© SEMICODE ELECTRONICA 2008. TECHNICAL DOCUMENTATION – NOT FOR RESALE