
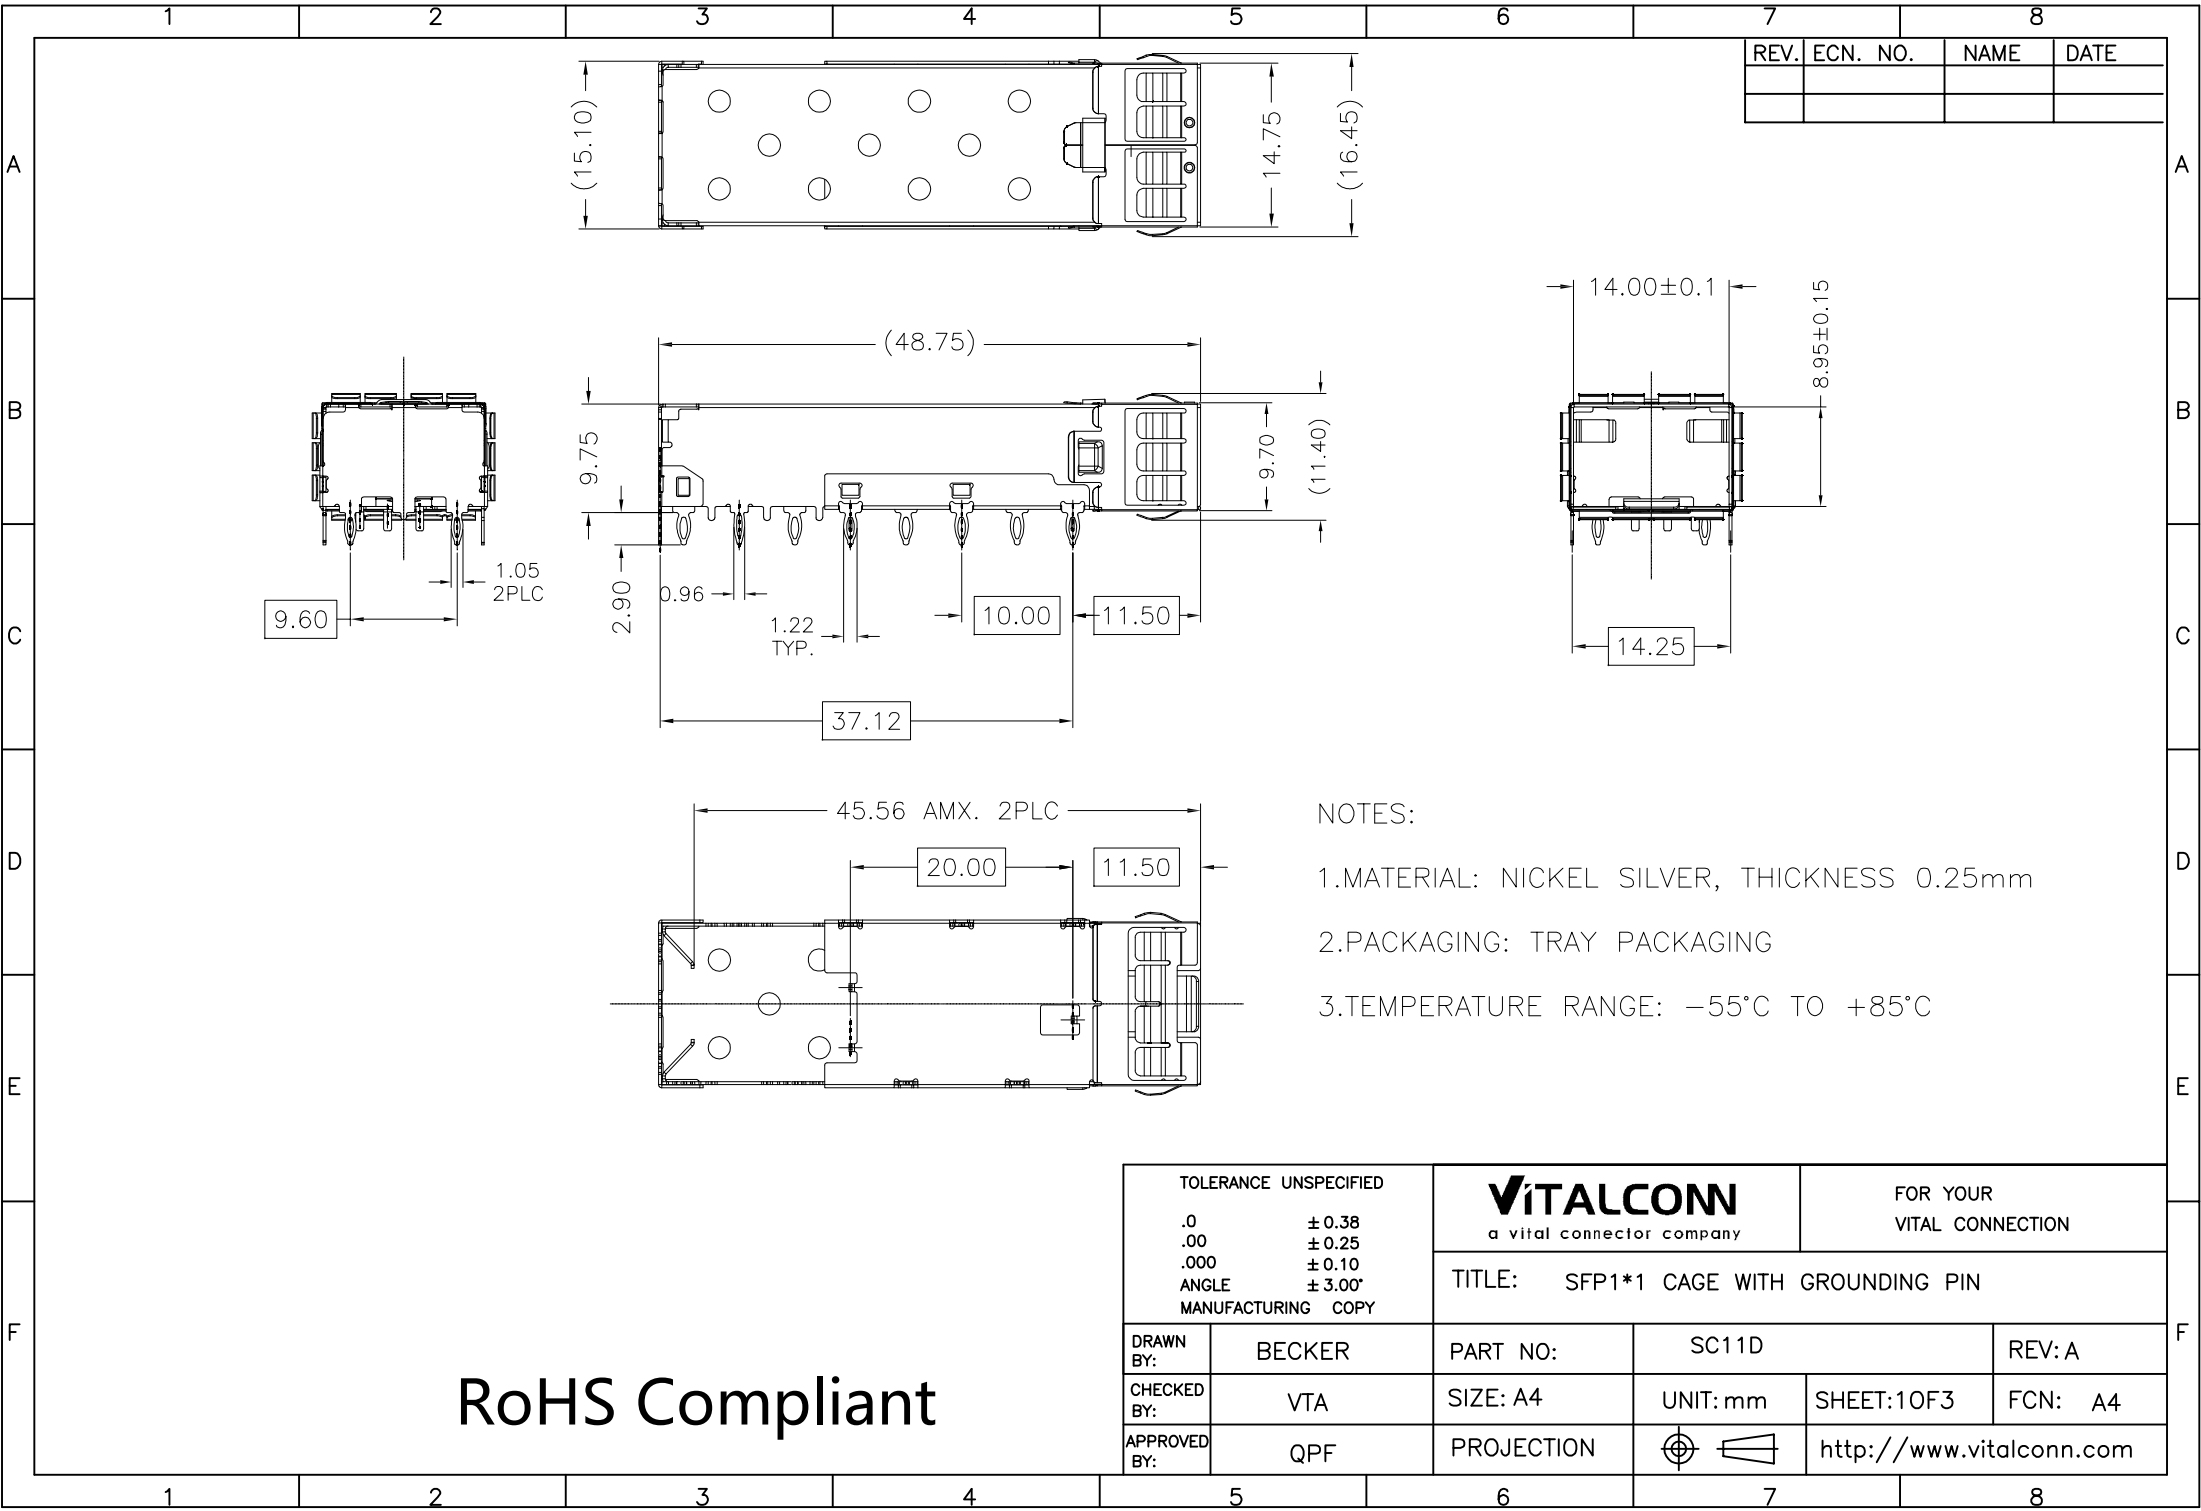






- NOTES:
- 1.MATERIAL: NICKEL SILVER, THICKNESS 0.25mm
 - 2.PACKAGING: TRAY PACKAGING
 - 3.TEMPERATURE RANGE: -55°C TO +85°C

RoHS Compliant

TOLERANCE UNSPECIFIED .0 ± 0.38 .00 ± 0.25 .000 ± 0.10 ANGLE ± 3.00° MANUFACTURING COPY		VITALCONN a vital connector company		FOR YOUR VITAL CONNECTION	
		TITLE: SFP1*1 CAGE WITH GROUNDING PIN			
DRAWN BY:	BECKER	PART NO:	SC11D		REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT: mm	SHEET: 10F3	FCN: A4
APPROVED BY:	QPF	PROJECTION		http://www.vitalconn.com	

CROSS-HATCHED AREA DENOTES
COMPONENT AND TRACE KEEP-OUT
(EXCEPT CHASSIS GROUND)

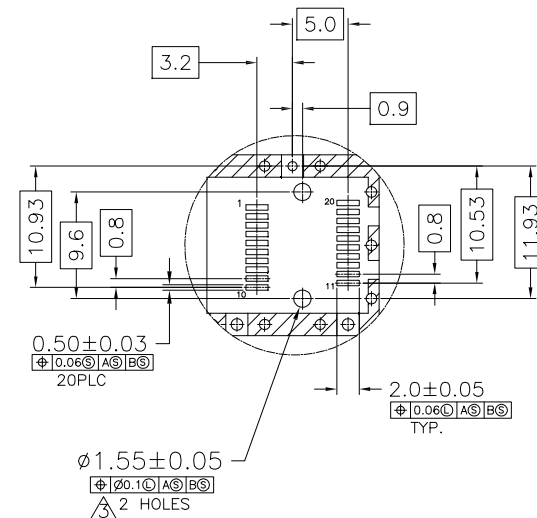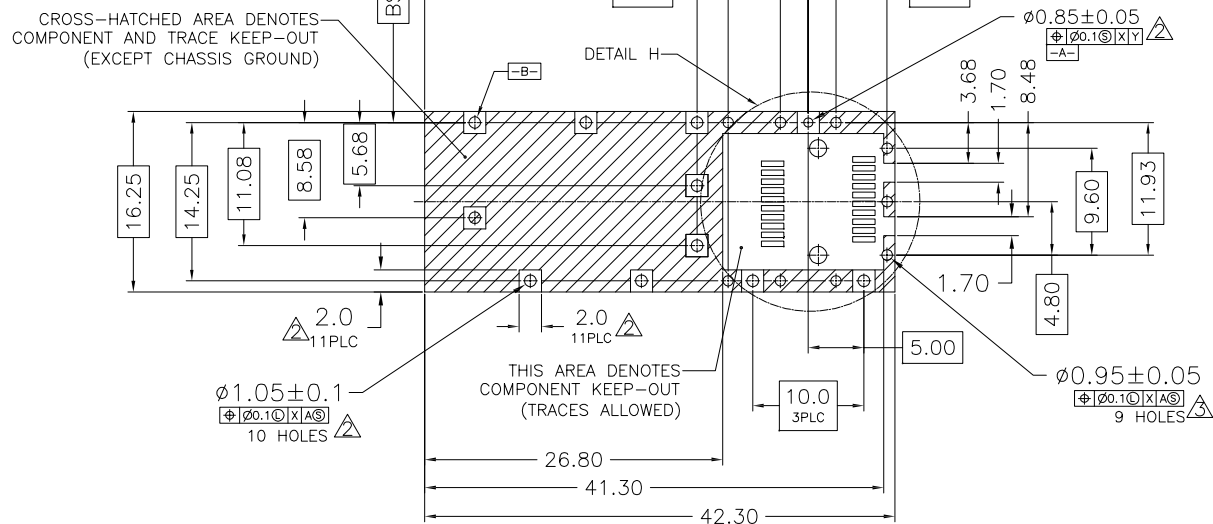

ECOMMENDED PCB CONFIGURATION

NOTES:

1. DATUM AND BASIC DIMENSIONS ESTABLISHED BY CUSTOMER
2. PADS AND VIAS ARE CHASSIS GROUND, 11 PLACES
3. THRU HOLES, PLATING OPTIONAL

RoHS Compliant

TOLERANCE UNSPECIFIED

.0 ±0.38
.00 ±0.25
.000 ±0.10
ANGLE ±3.00°
MANUFACTURING COPY


VITALCONN
a vital connector company

FOR YOUR
VITAL CONNECTION

TITLE: SFP1*1 CAGE WITH GROUNDING PIN

DRAWN BY:	BECKER	PART NO:	SC11D	REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT: mm	SHEET: 20F3
APPROVED BY:	QPF	PROJECTION		FCN: A4
		http://www.vitalconn.com		

REV.	ECN. NO.	NAME	DATE

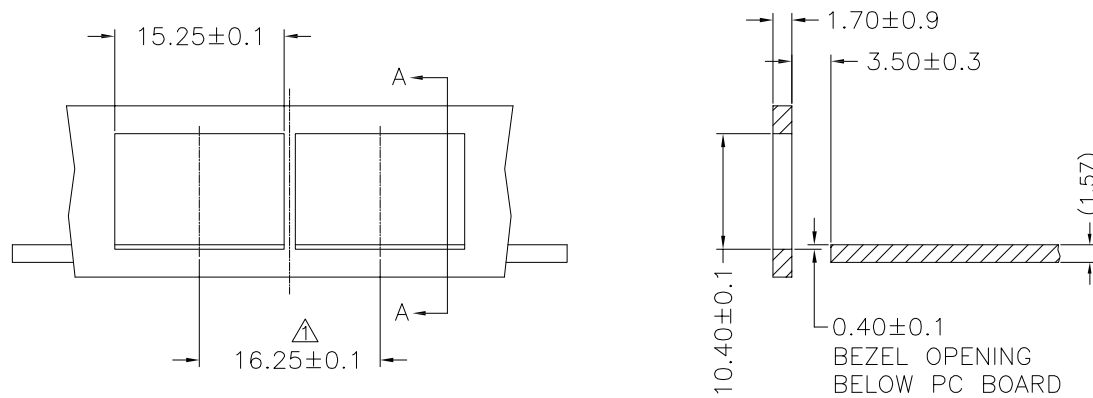


SECTION A-A

RECOMMENDED BEZEL DESIGN

NOTES:
 ⚠ MINIMUM PITCH ILLUSTRATED, ENGLISH DIMENSIONS ARE FOR REFERENCE ONLY

RoHS Compliant

TOLERANCE UNSPECIFIED .0 ± 0.38 .00 ± 0.25 .000 ± 0.10 ANGLE ± 3.00° MANUFACTURING COPY		VITALCON a vital connector company		FOR YOUR VITAL CONNECTION	
		TITLE: SFP1*1 CAGE WITH GROUNDING PIN			
DRAWN BY:	BECKER	PART NO:	SC11D		REV: A
CHECKED BY:	VTA	SIZE: A4	UNIT: mm	SHEET:30F3	FCN: A4
APPROVED BY:	QPF	PROJECTION			http://www.vitalconn.com